




Installation Guide
2019 Chevrolet Silverado / GMC Sierra
with Multi-Pro Step option



Product Code
223-224-225-226

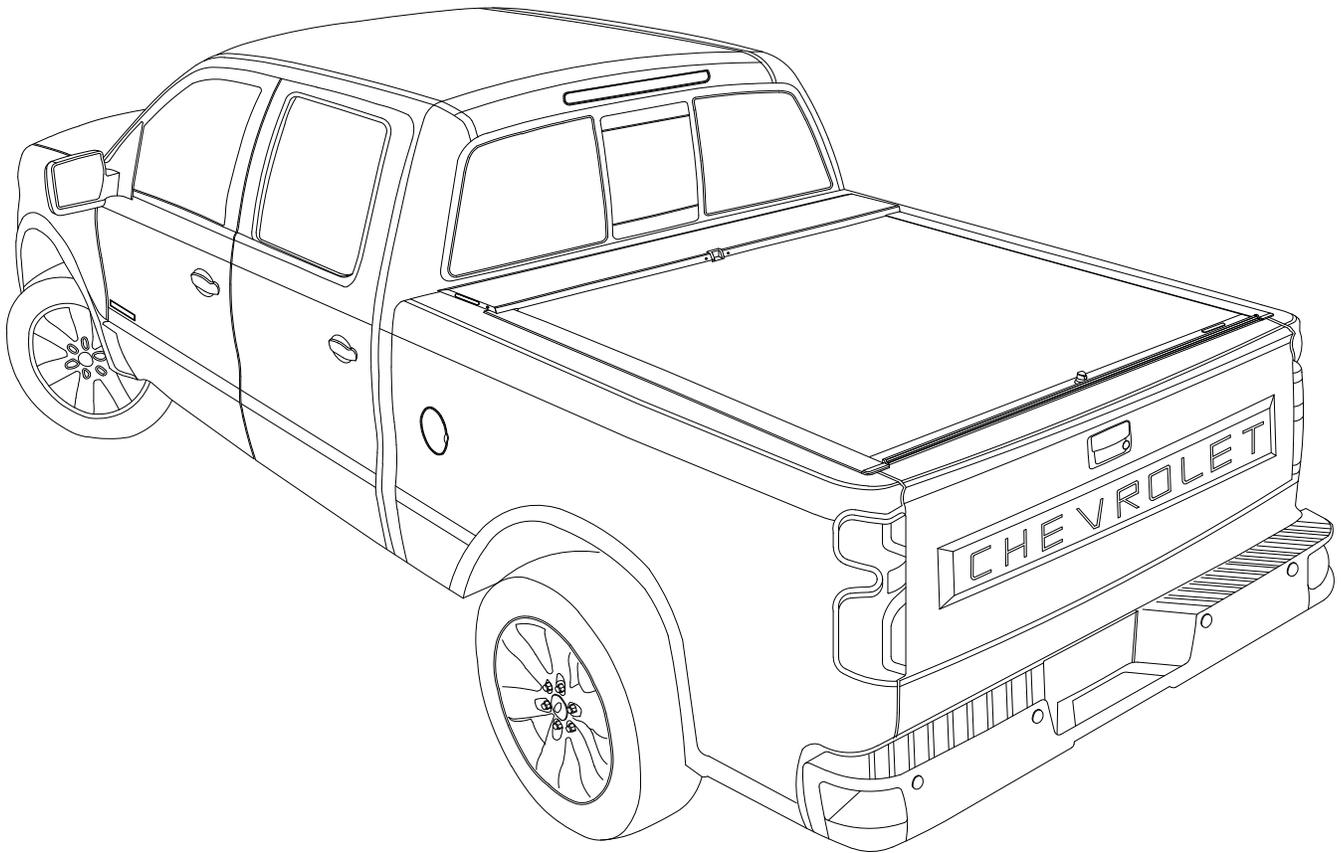


Caution



This Tonneau Cover may retract to the full open position very quickly resulting in any objects placed on top of the Tonneau Cover to fall off the Tonneau or become trapped inside of the Tonneau carrier. Do not place ANY objects on top of the Tonneau Cover when attempting to close. Failure to follow the instruction may result in damage to your vehicle, belongings or Tonneau Cover. To avoid injury keep all body parts clear of Tonneau Cover and carrier when opening.


Parts List

Item	Part Name	Qty.	Item	Part Name	Qty.	Item	Part Name	Qty.
A	Housing	1	J	Nylon Retaining Washer	4	S	#8 x 3/4" Self Tap Screw	2
B	Track	2	K	Bed Clamp	4/6	T	Shim	4
C	Cargo Shield	1	L	5/16" Socket Cap Screw	4/6	U	1/4-20 x 3/8" Screw	4
D	Housing Bracket	2	M	5/16" Lock Washer	4/6	V	Black Rubber Washer	4
E	Drain Tube	2	N	1/4" Socket Cap Screw	2	W	1/4" Lid Screw	2
F	Track Bracket	2	O	1/4" Lock Washer	2	X	Allen Wrench (1/4")	1
G	Threaded Tang	4	P	Butyl Caulk Strip	2	Y	Allen Wrench (3/16")	1
H	1/4-20 x 1" Bolt	4	Q	Cargo Nut	2	*Z	Track Bracket Shim	2
I	1/4" Flat Washer	6	R	#10-24 Screw	2	*AA	Track Clamp for Step	1
							303 Protectant™	1

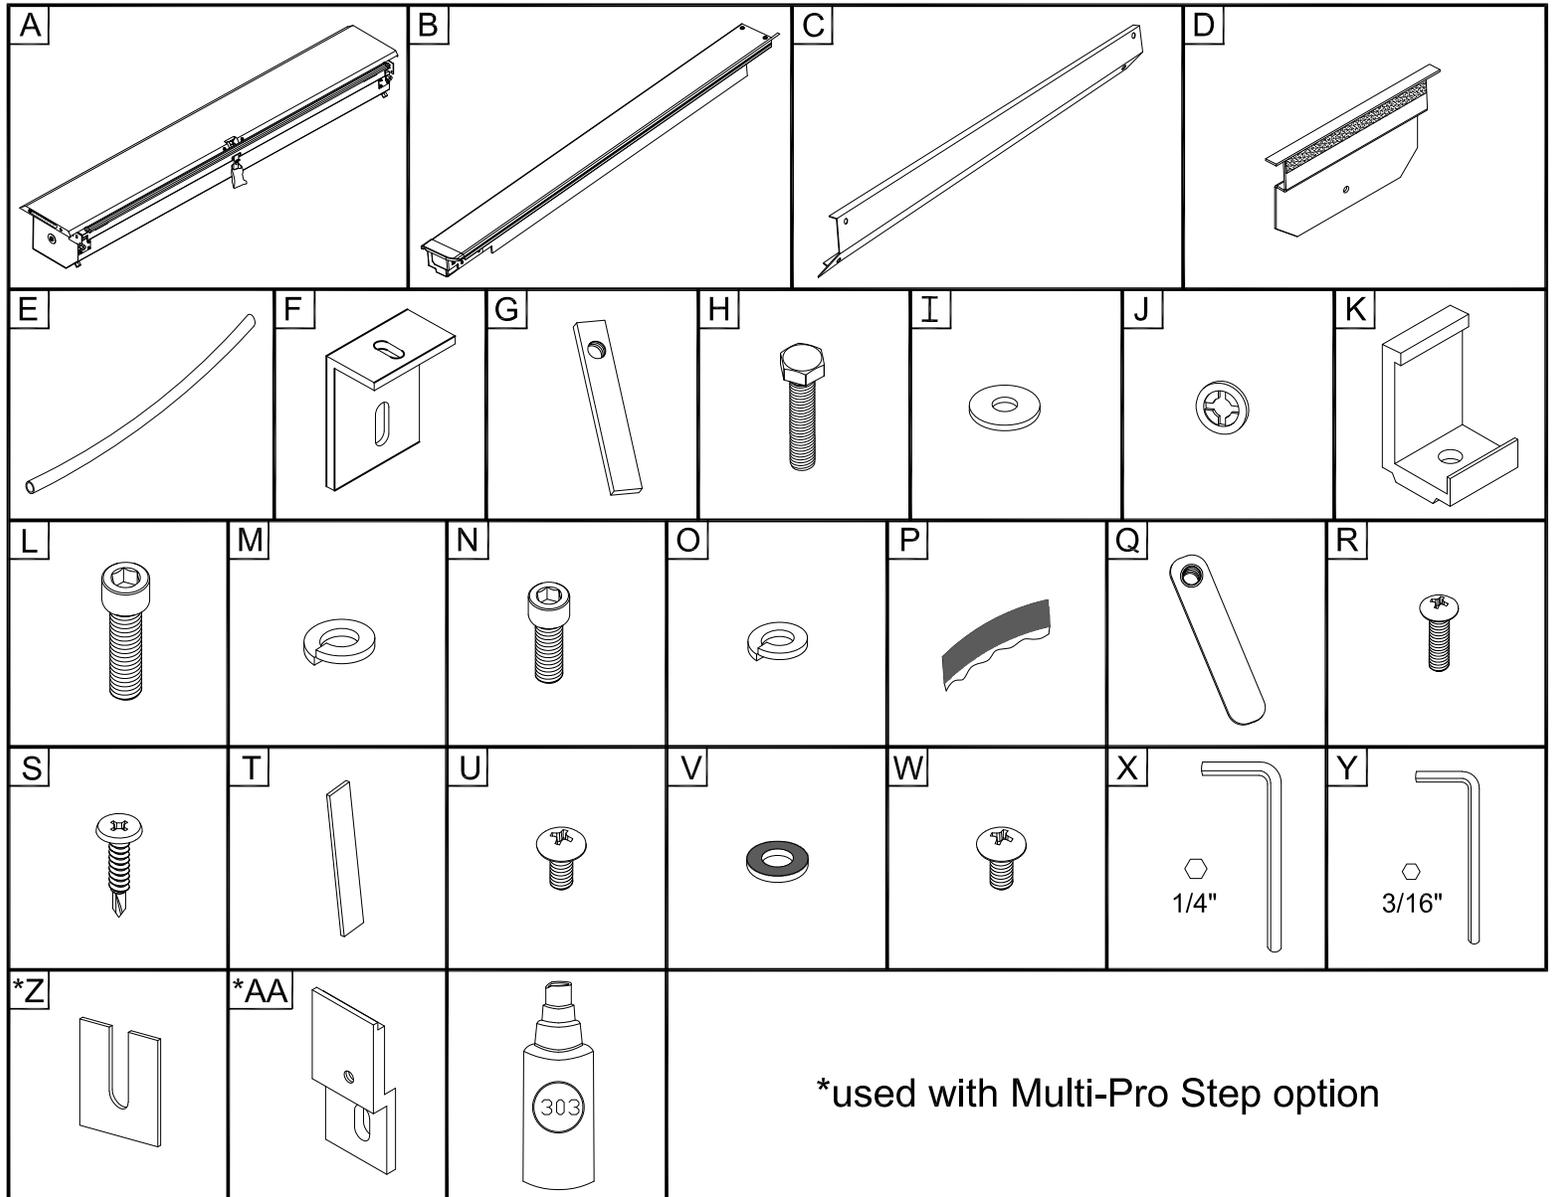


*used with Multi-Pro Step option


Tools Needed

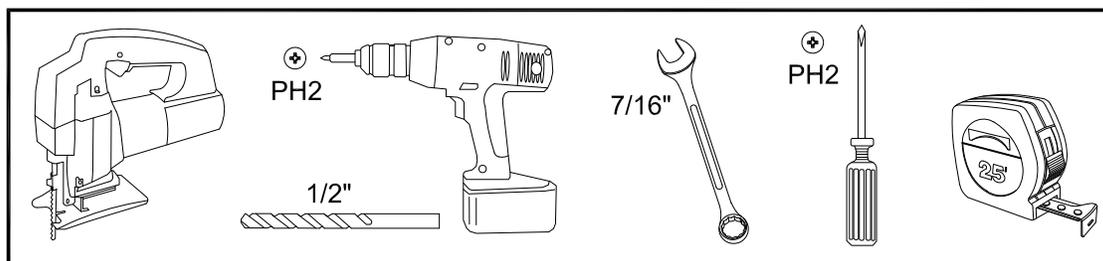


1a If no plastic bedliner present proceed to page 5

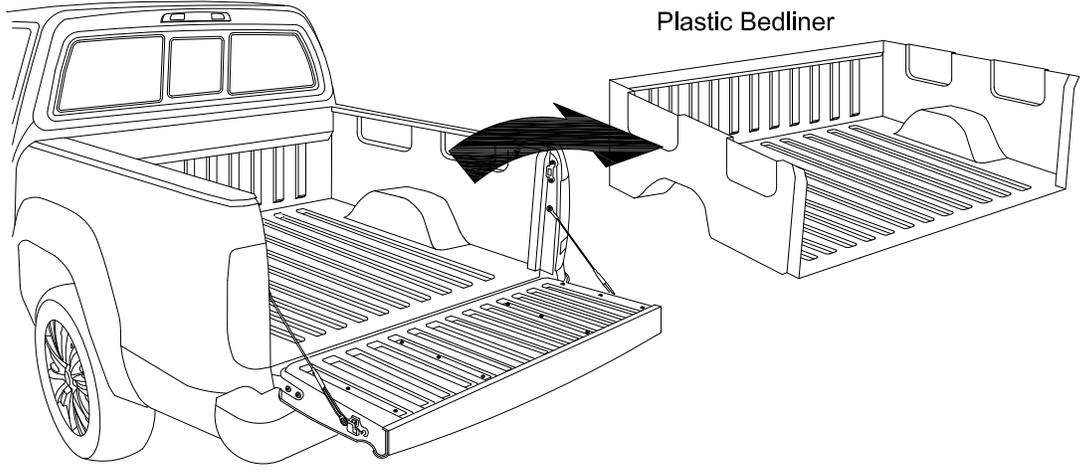


1b

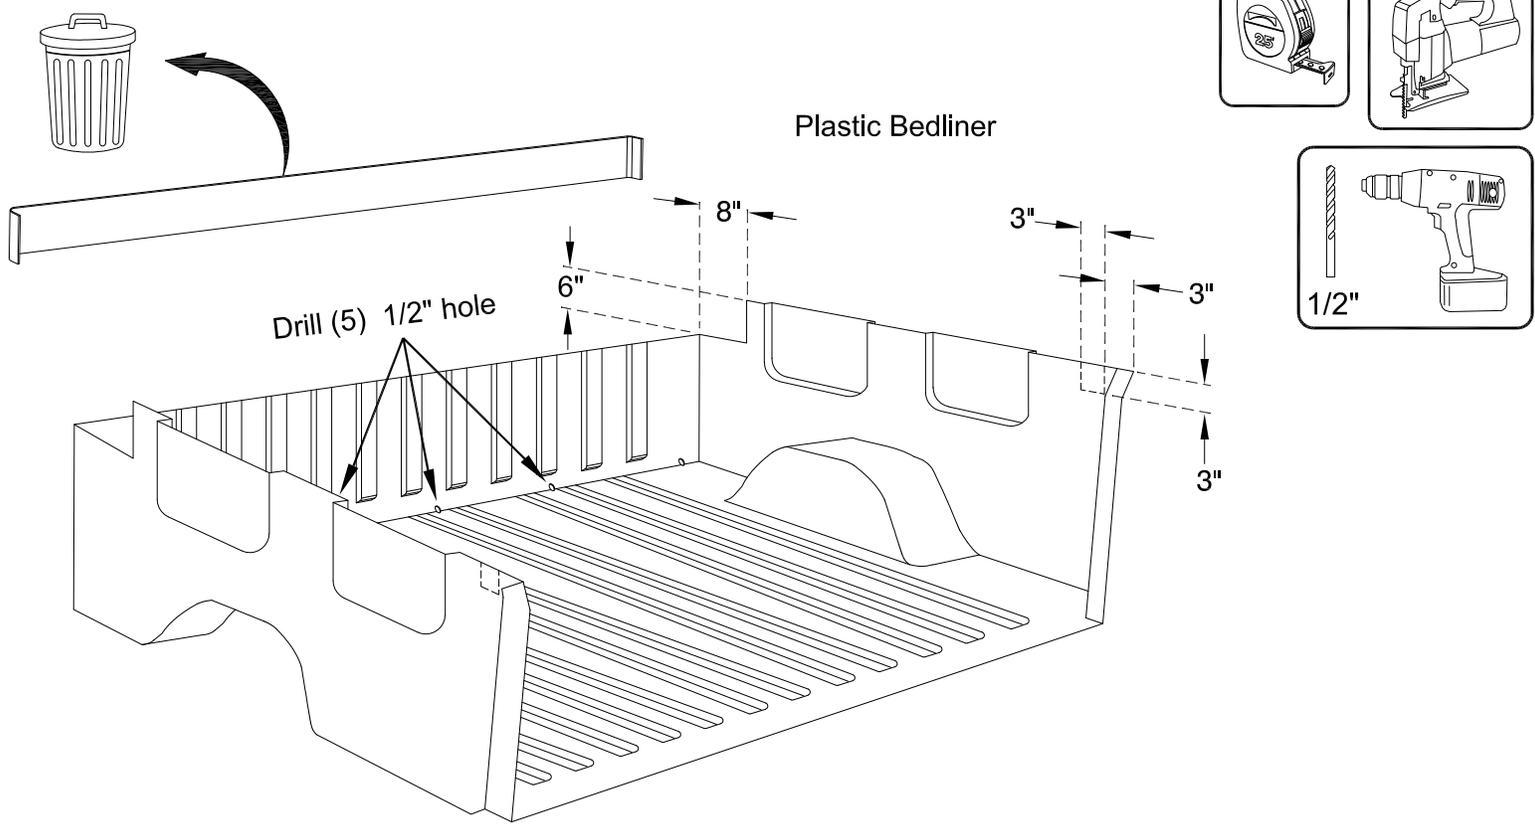


1c

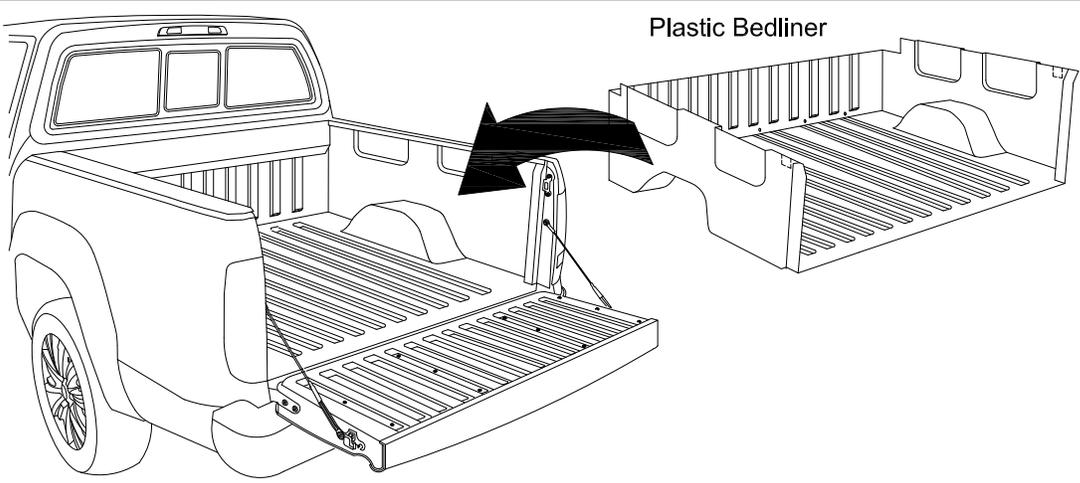

IF TRUCK IS **NOT** EQUIPPED WITH
THE MULTI-PRO STEP PROCEED
WITH PAGES 6-15




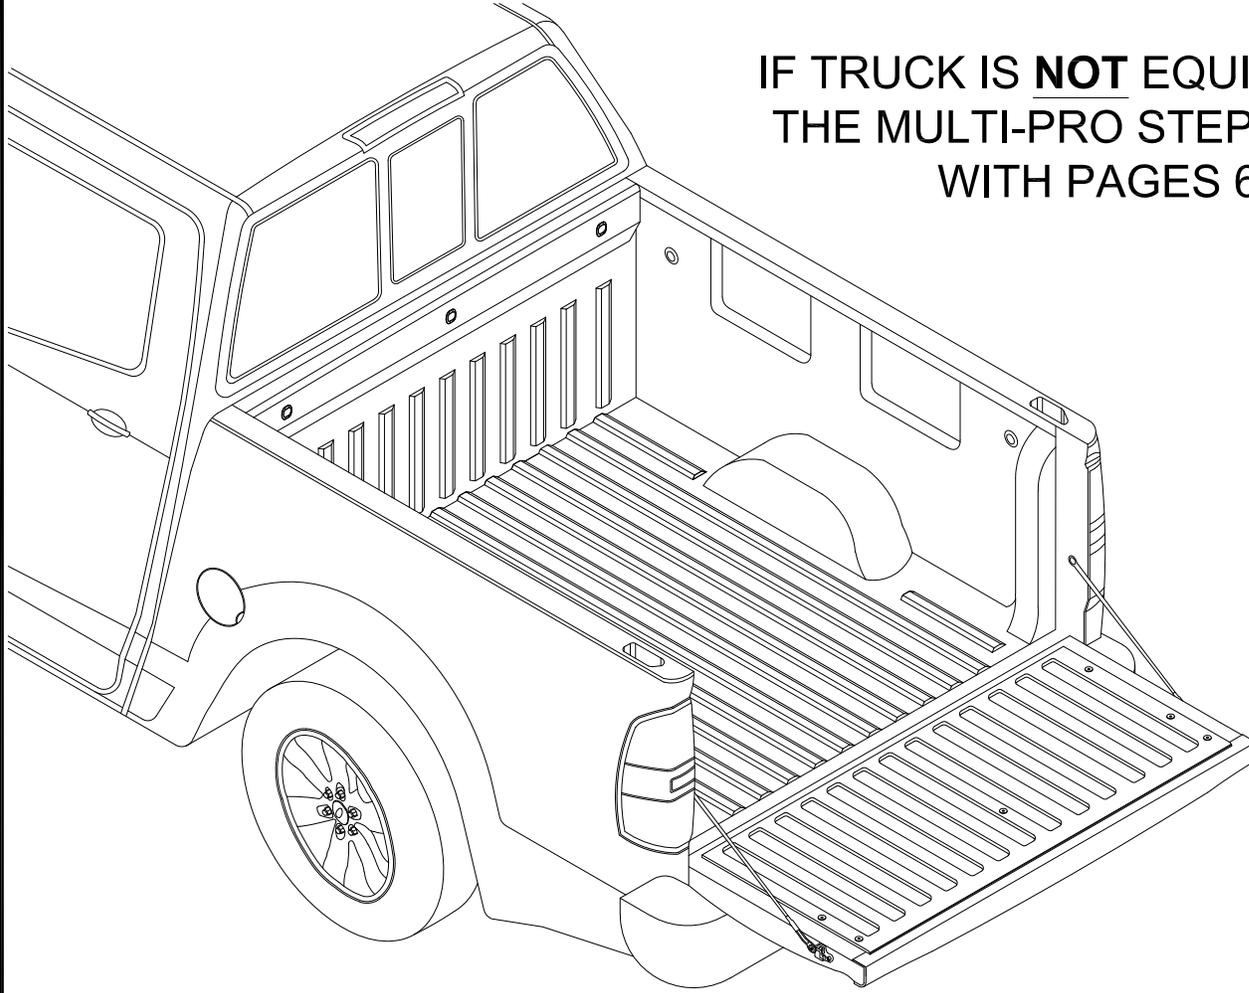


IF TRUCK IS EQUIPPED WITH THE
MULTI-PRO STEP PROCEED WITH
PAGES 16-27

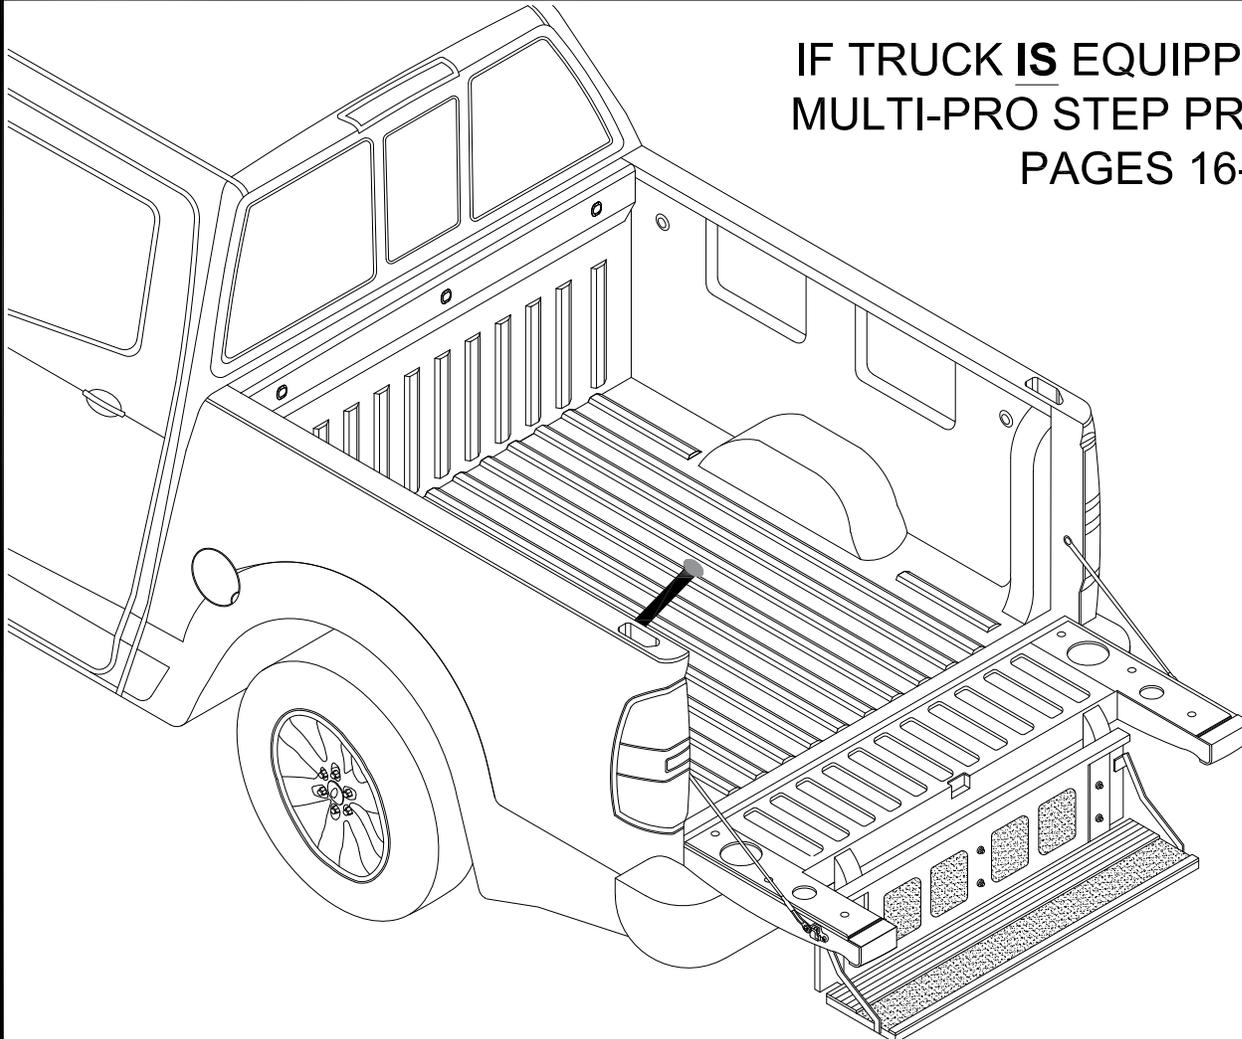


1 LHS = RHS

Assemble the Housing Bracket **D**, insert as shown, level and tighten.

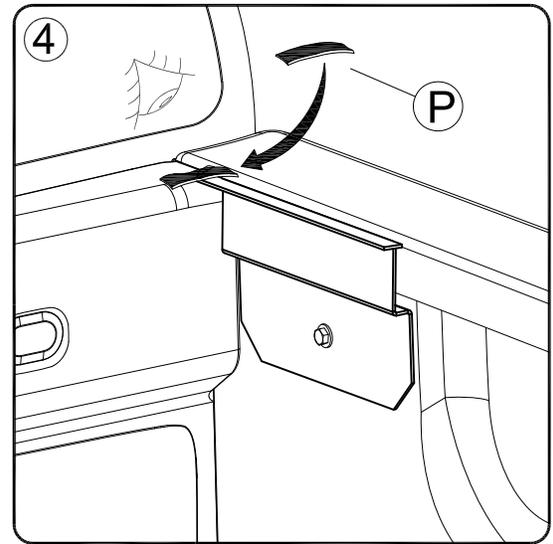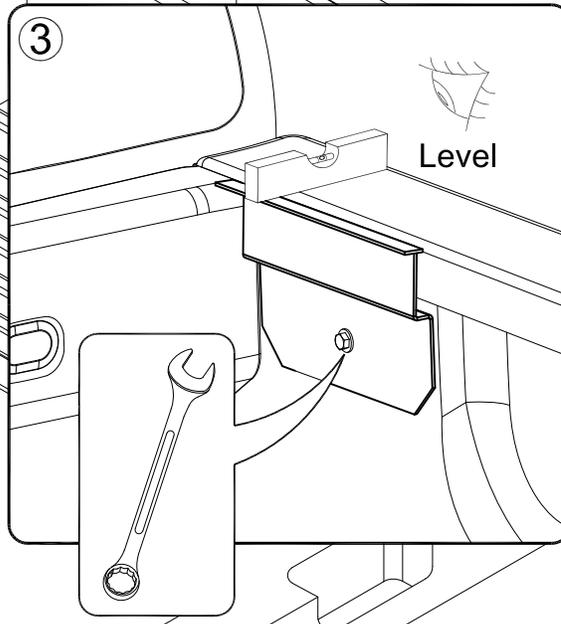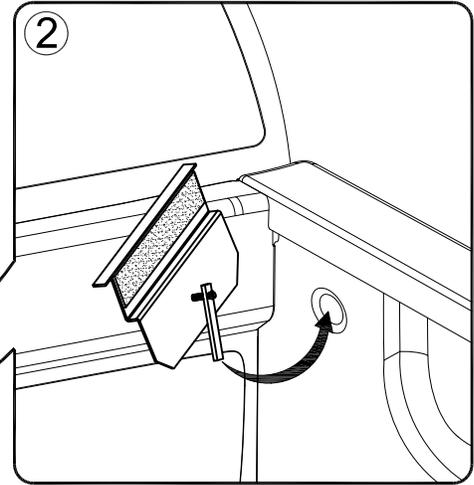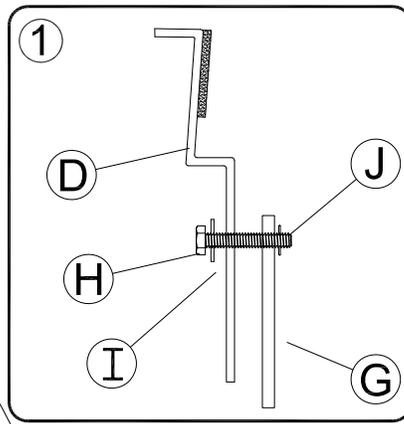



2 LHS = RHS

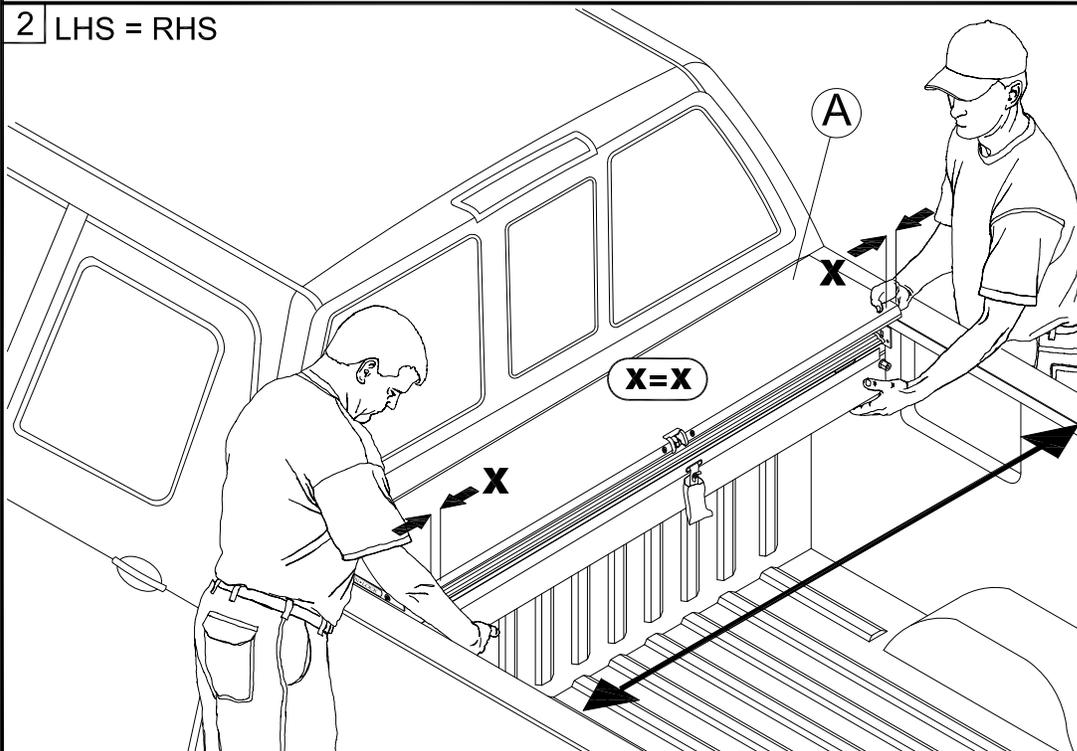

Center the Housing **A** between the bed rails up against the bulkhead.





3 LHS = RHS

Remove Lid.

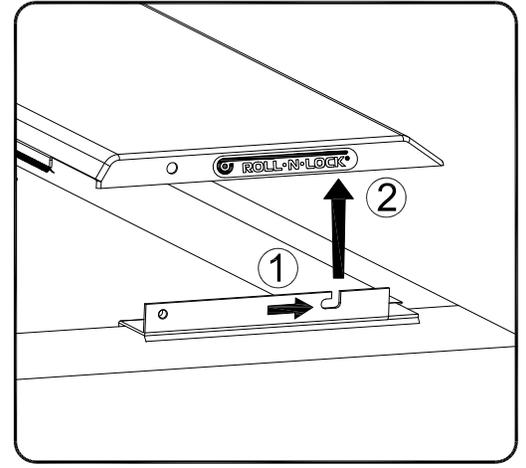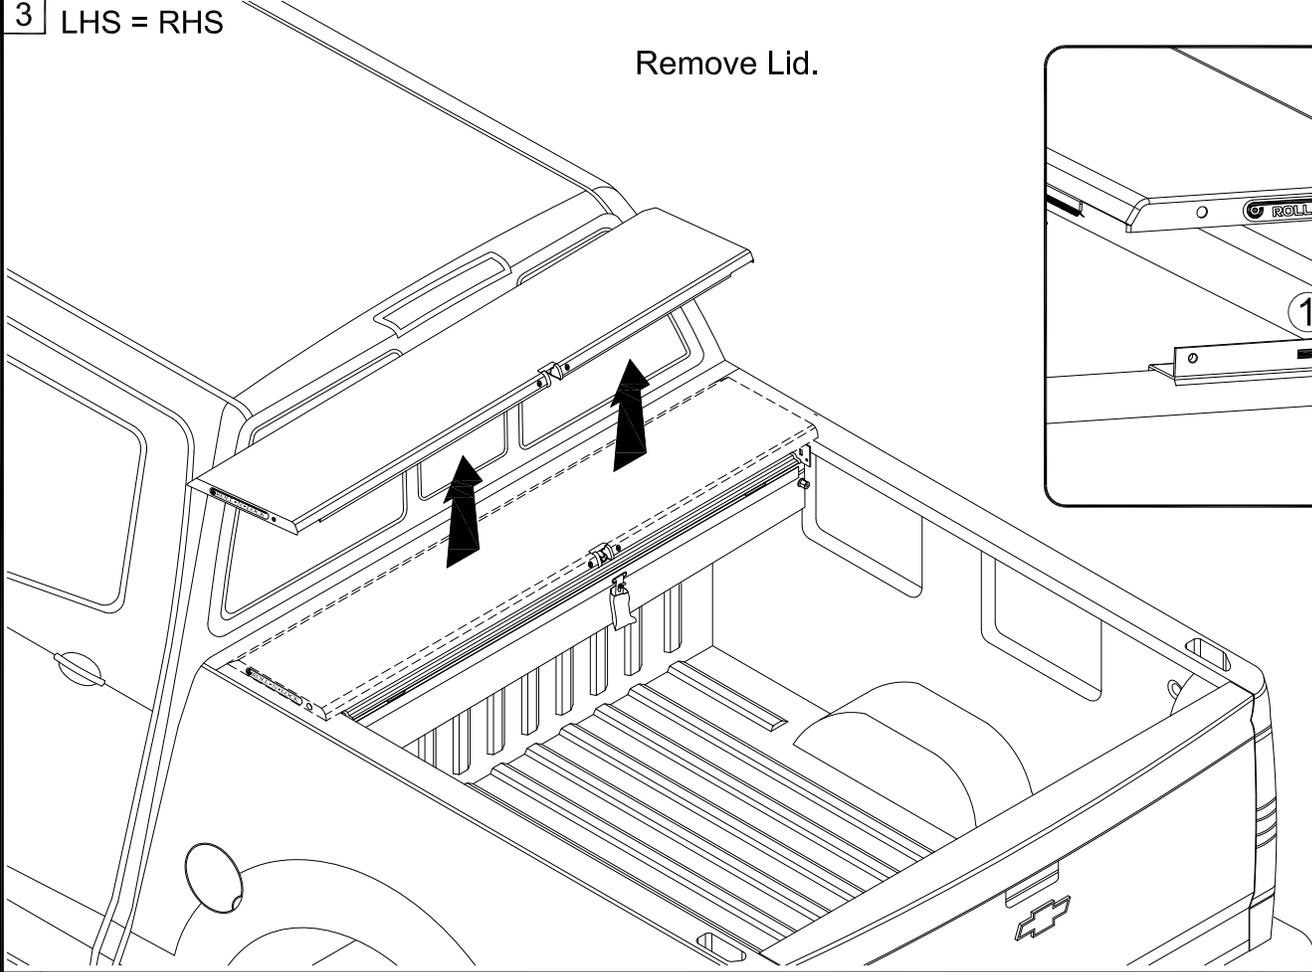




4 LHS = RHS

Assemble the track bracket (F), insert as shown and loosely attach.

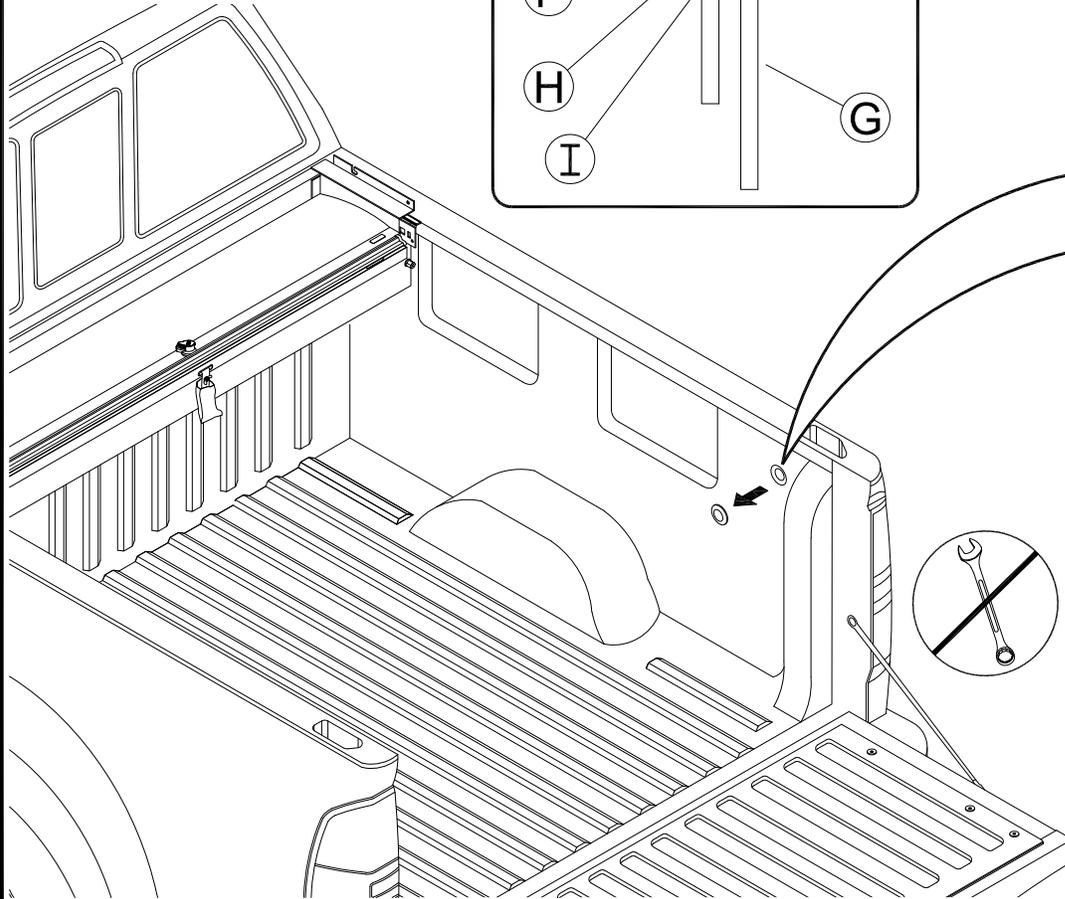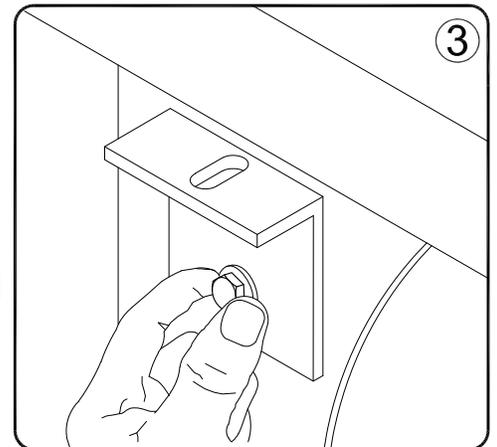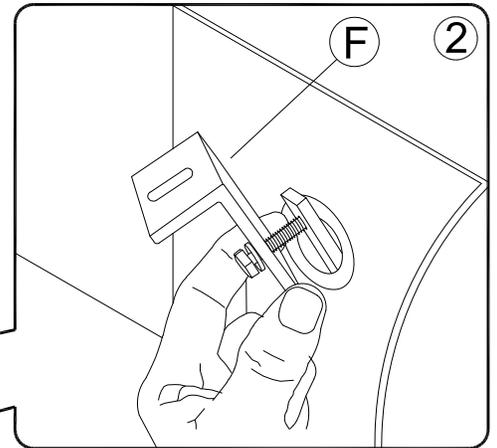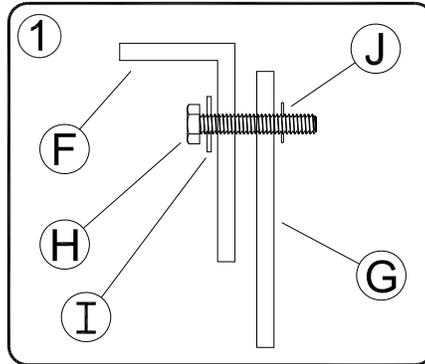





5 LHS = RHS

Turn lock to 10 o'clock, key Tracks (B) onto housing stems. Do **not** remove plastic wing nut.

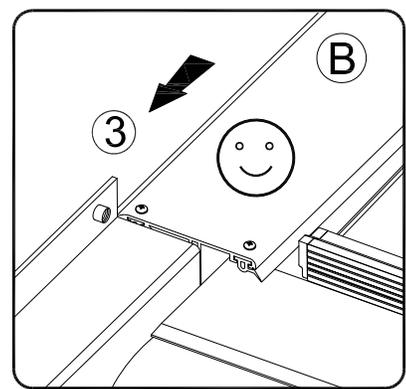
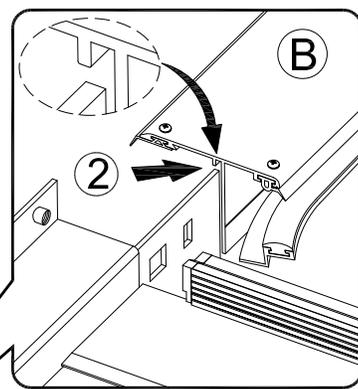
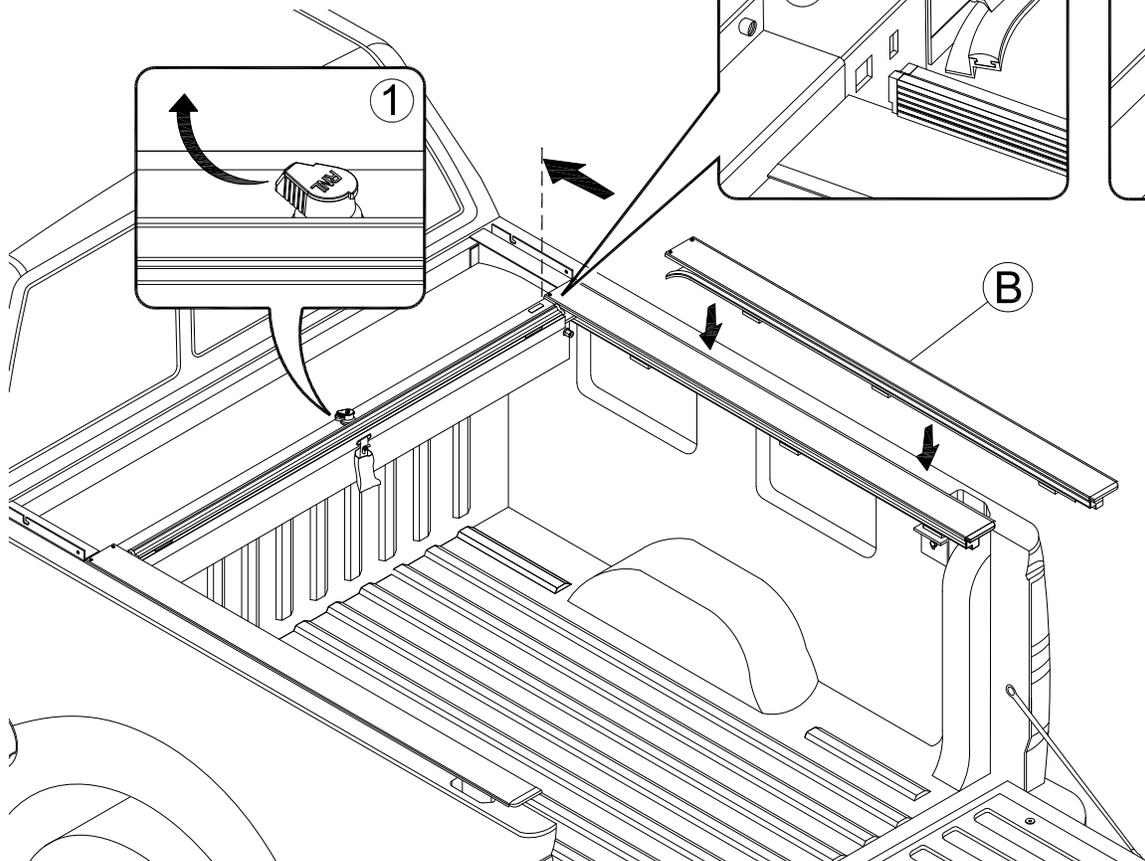


6 LHS = RHS

Loosely attach the Track Bracket (F) and Bed Clamps (K) to the track clamps.

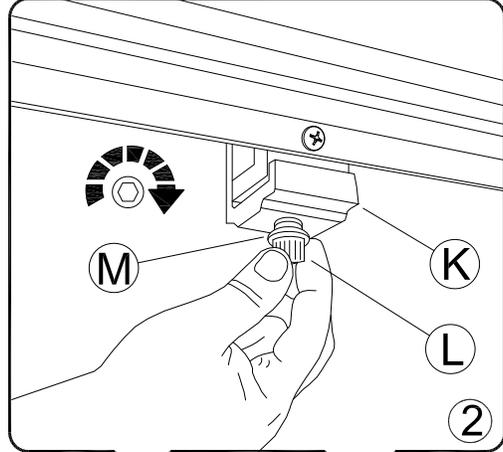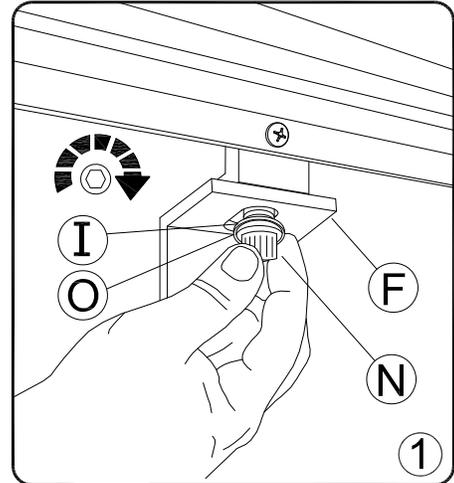
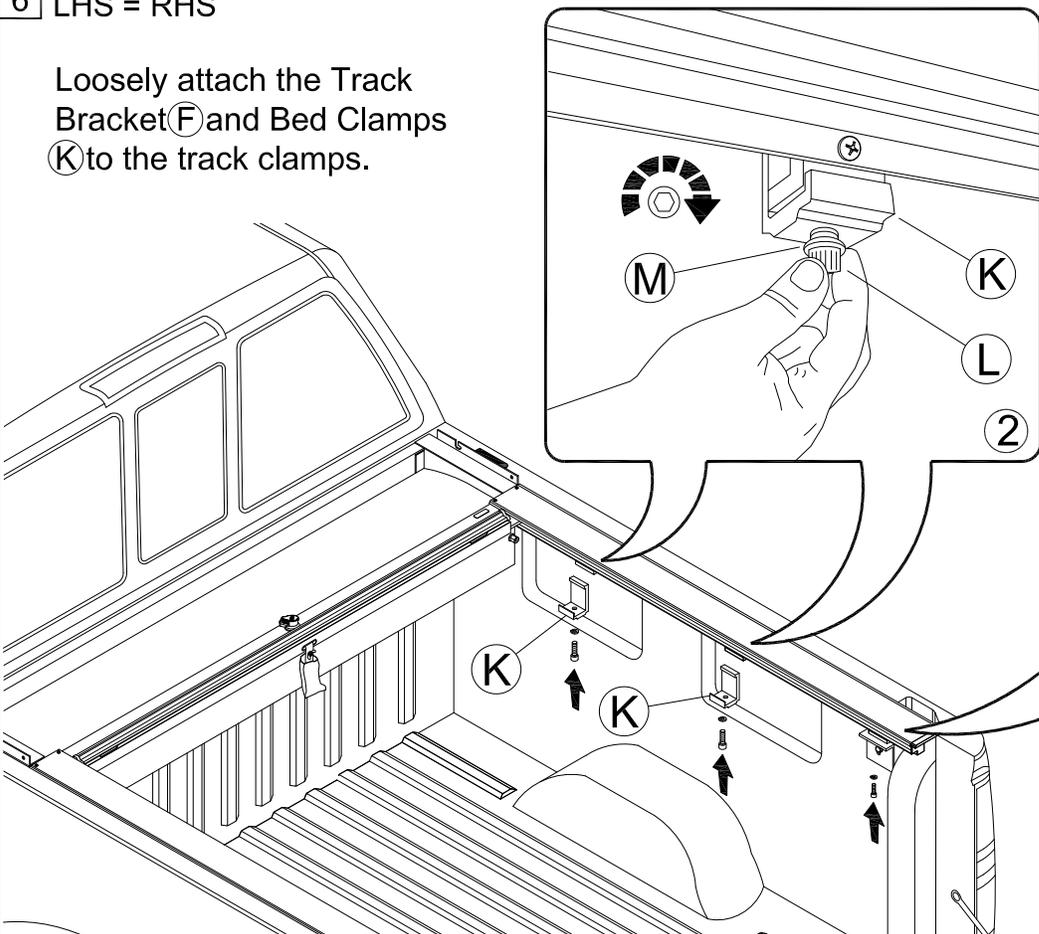


7 LHS=RHS

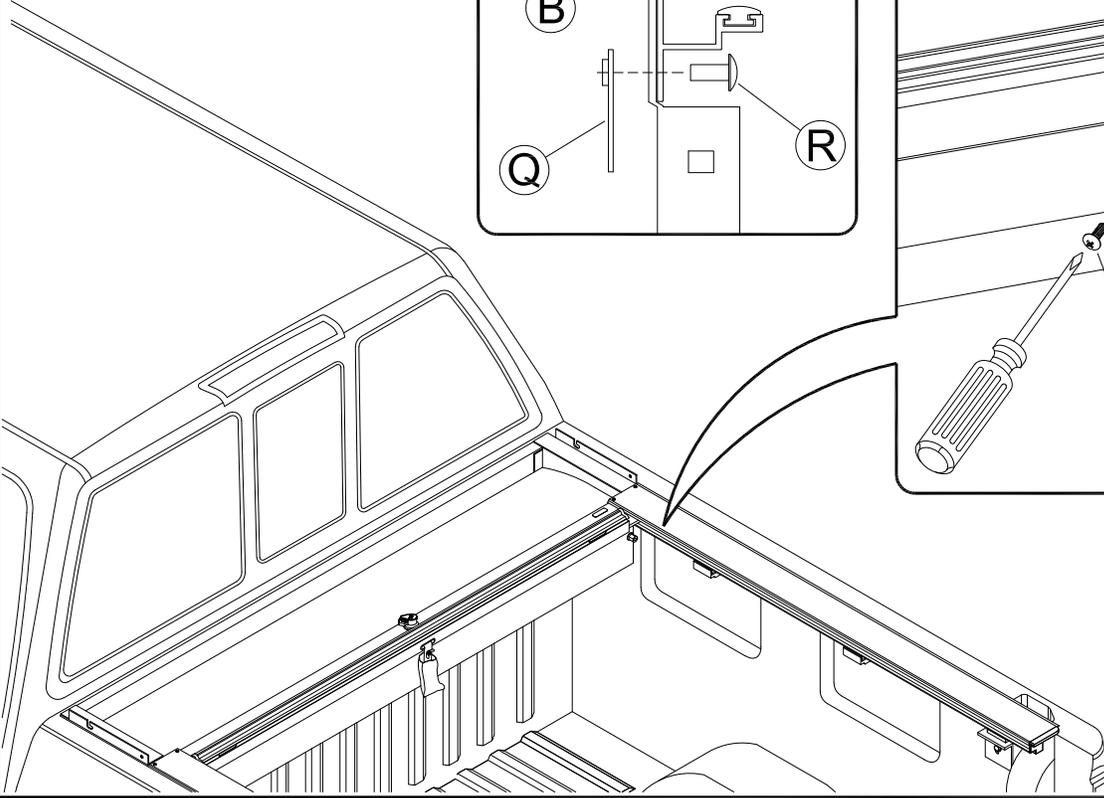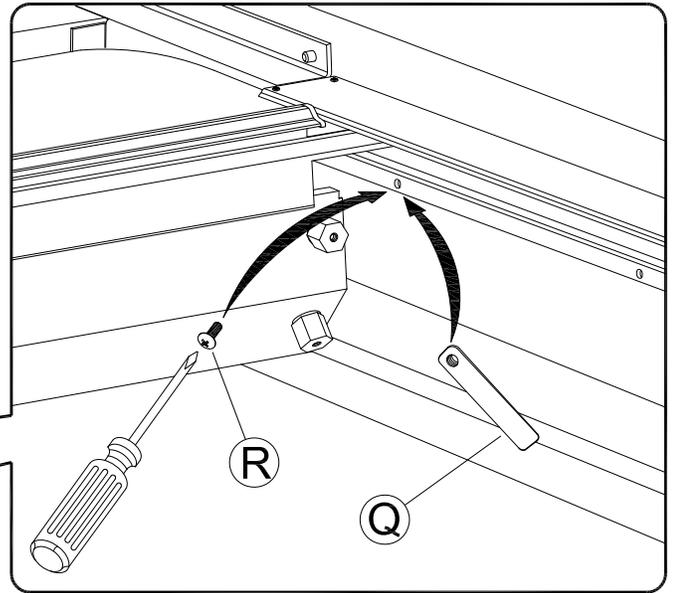
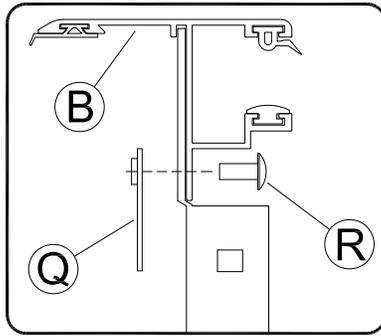


Secure Tracks to housing stems.

8 LHS = RHS

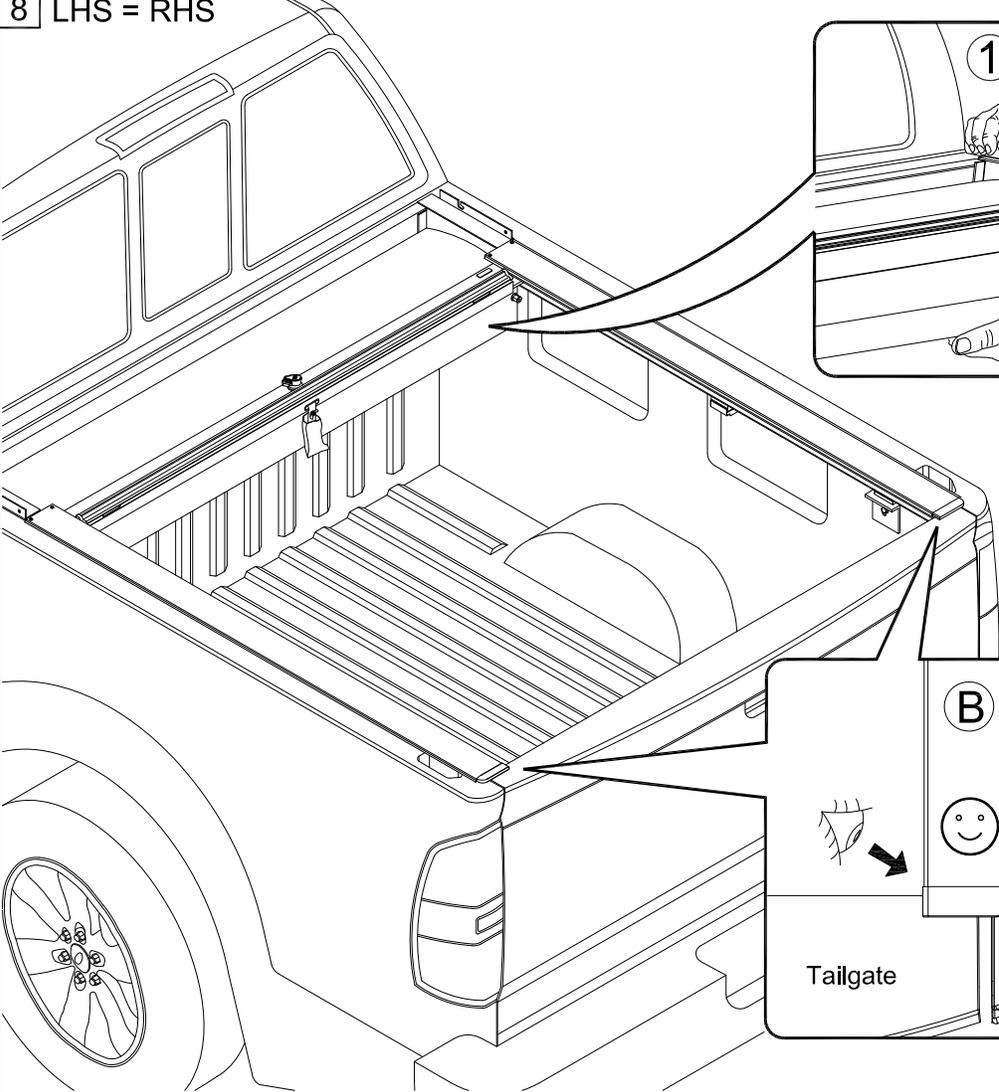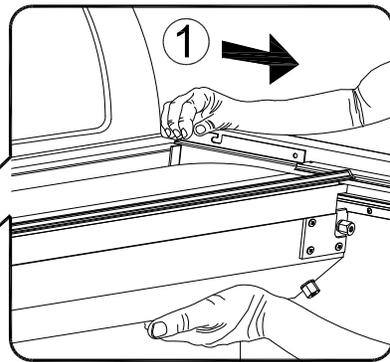

Close tailgate, shift the Housing back so the end of the Tracks are up against the tailgate.

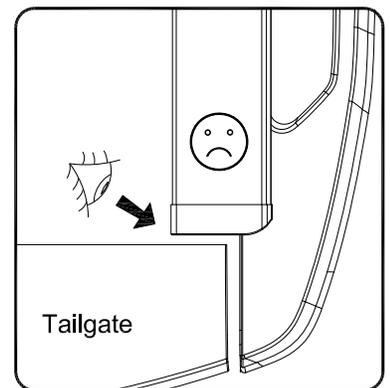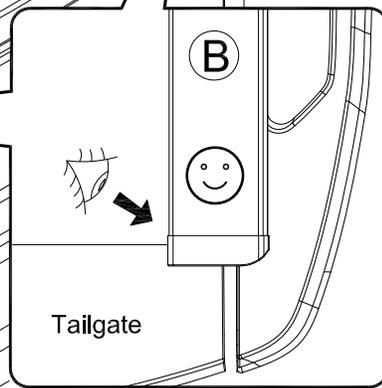


9 LHS = RHS



Important to check track to track inside dimension, otherwise the cover will not latch properly.

58 7/8"

58 7/8"

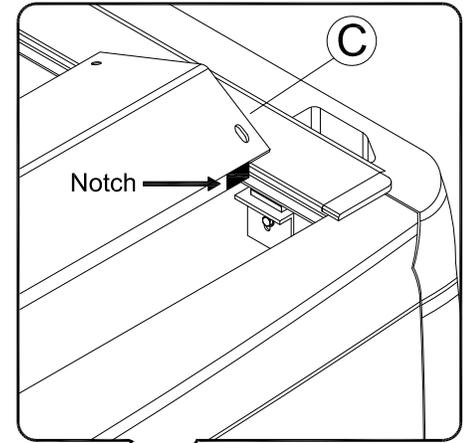


C



Use Cargo Shield © notches to ensure correct spacing of tracks.

10 LHS = RHS

Once tracks are correctly spaced and adjusted to the correct height tighten fasteners at back clamp.

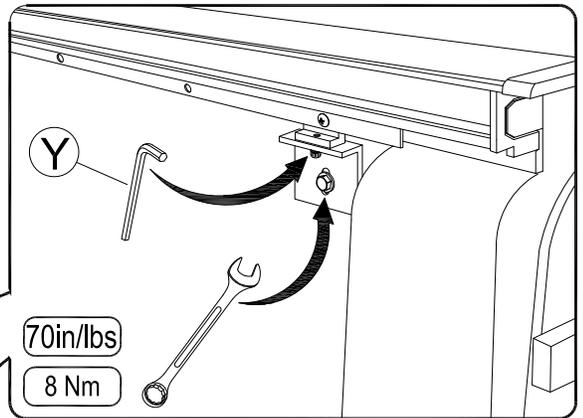

70in/lbs


8 Nm

1/8" space between track end cap and tailgate.



Track end cap

10a LHS = RHS

If needed:
Use shim(s) **T** to align the
track to correct position.

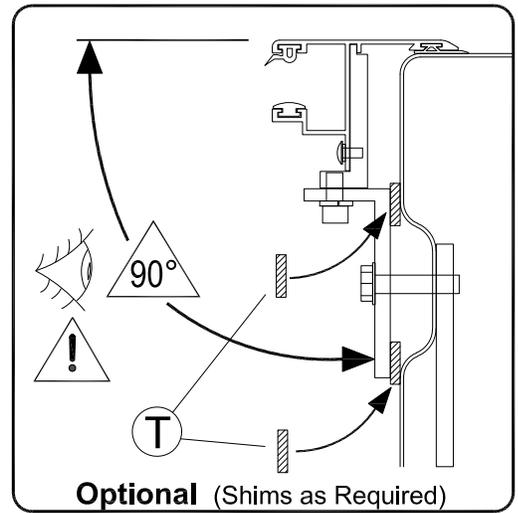





11 LHS = RHS

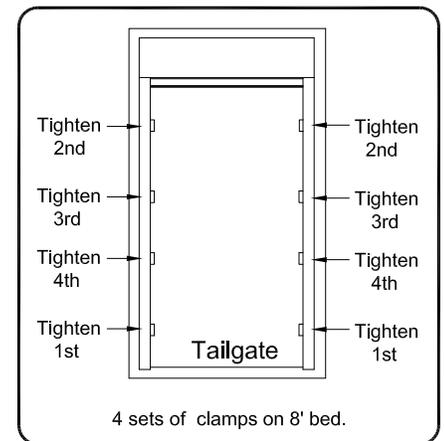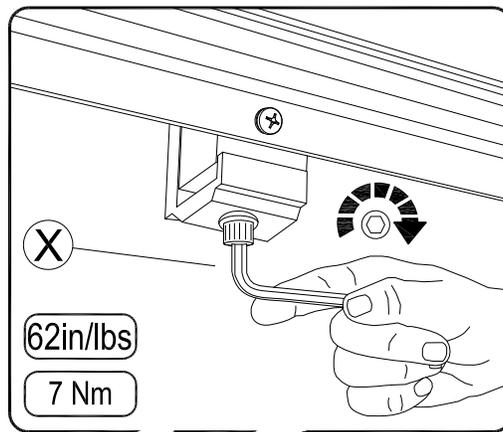

Tighten bed clamps to the track clamps. Note: When tight there may be a gap between the clamps, do not overtighten.



12 LHS = RHS




Turn lock to 7 o'clock, remove plastic wing nut and using both hands pull cover back to tailgate. Screw housing into housing bracket.

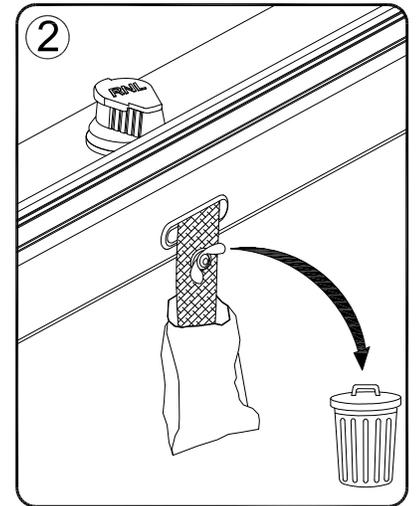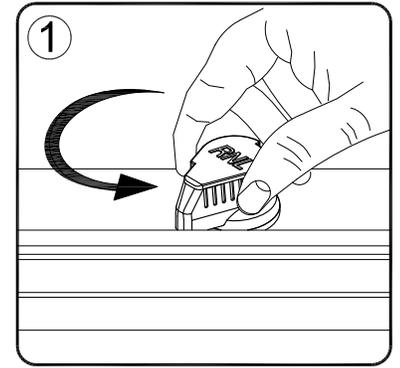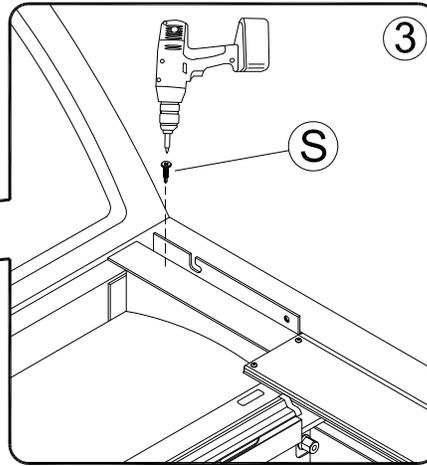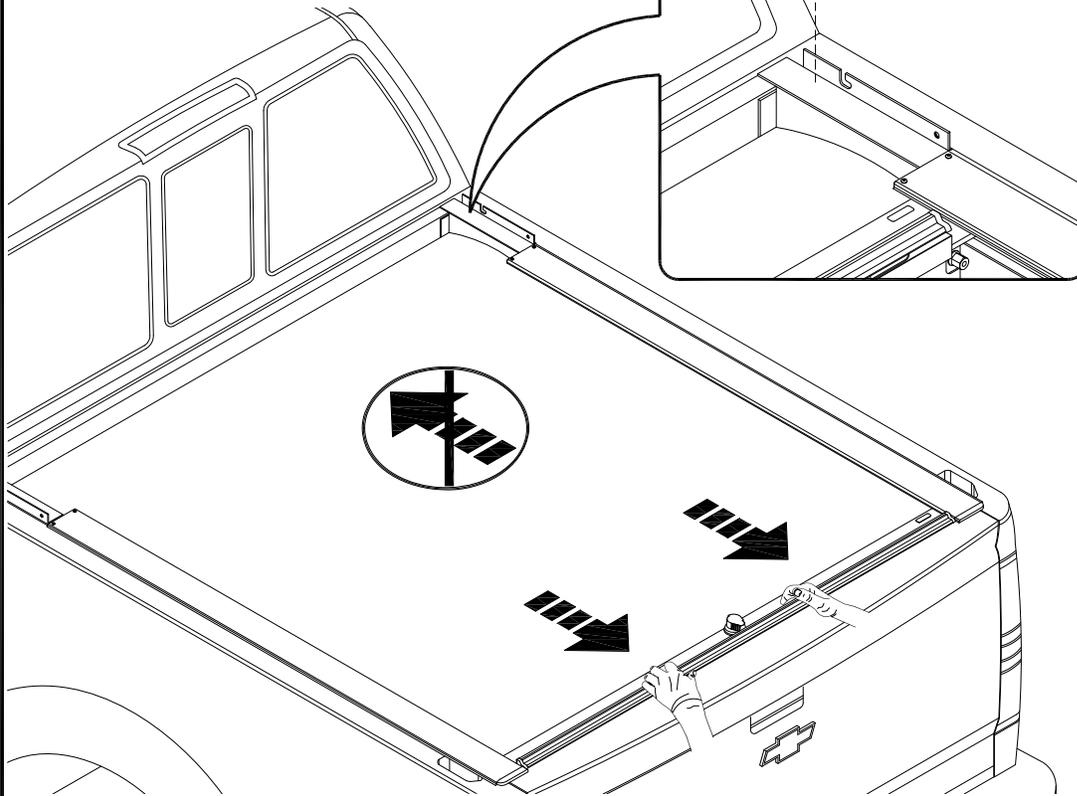

13 LHS = RHS

Replace lid.



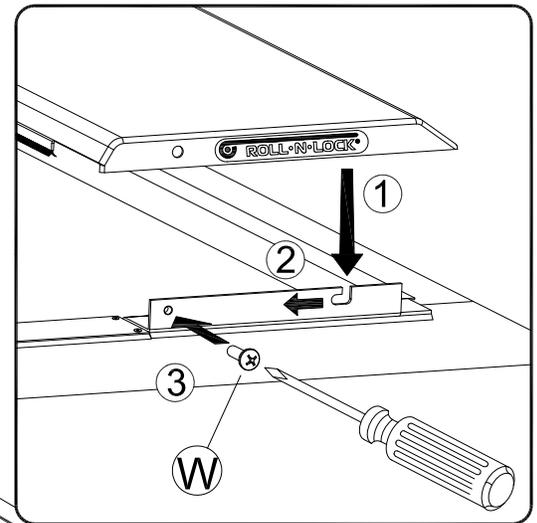
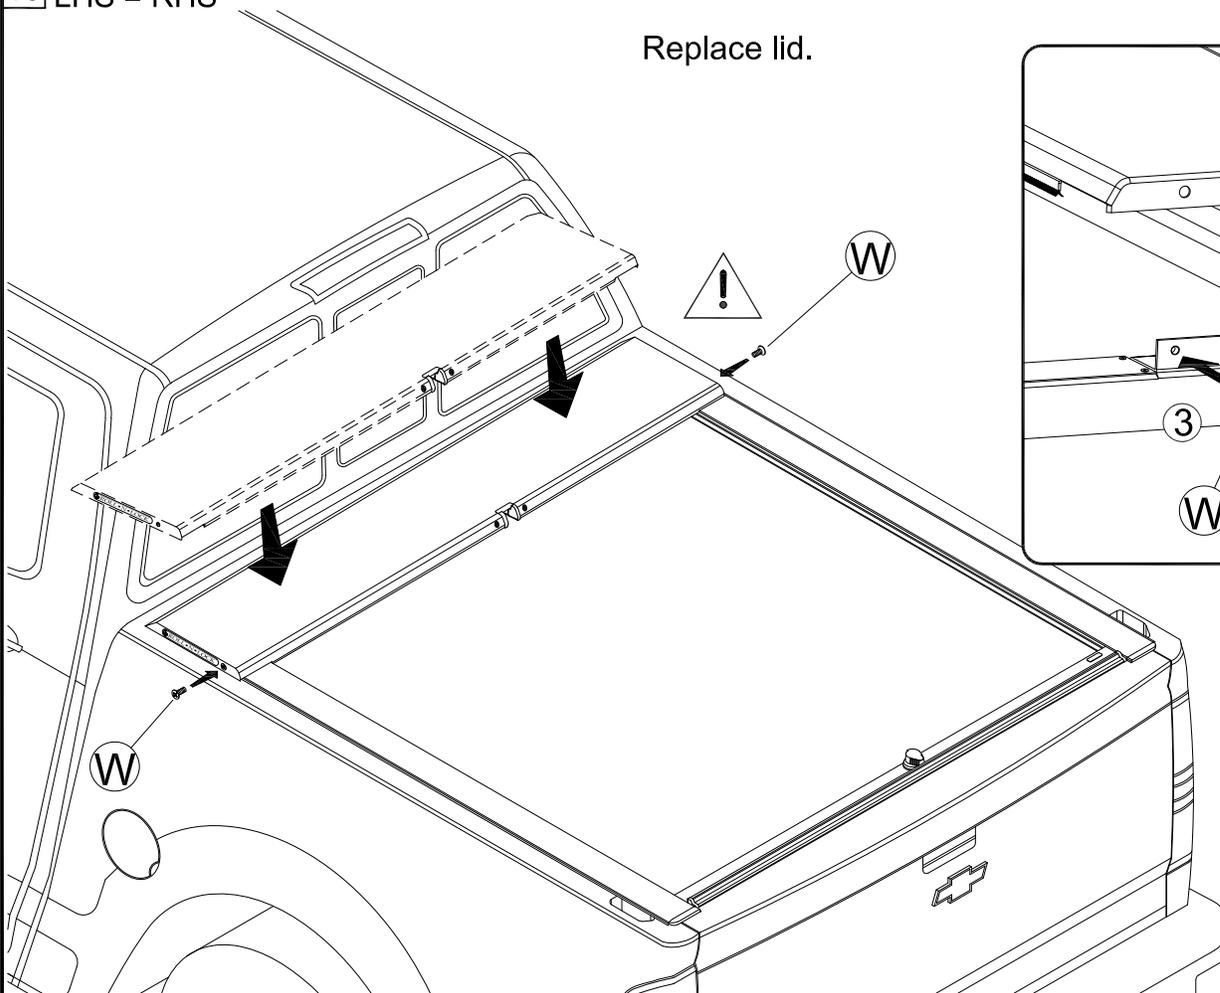


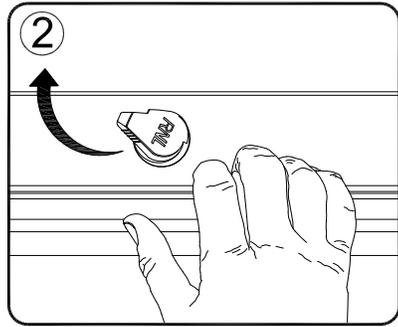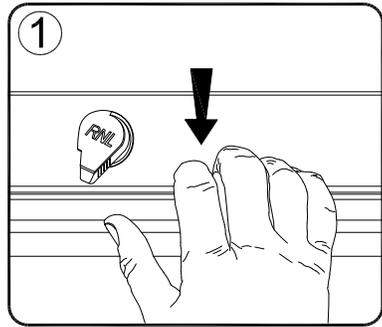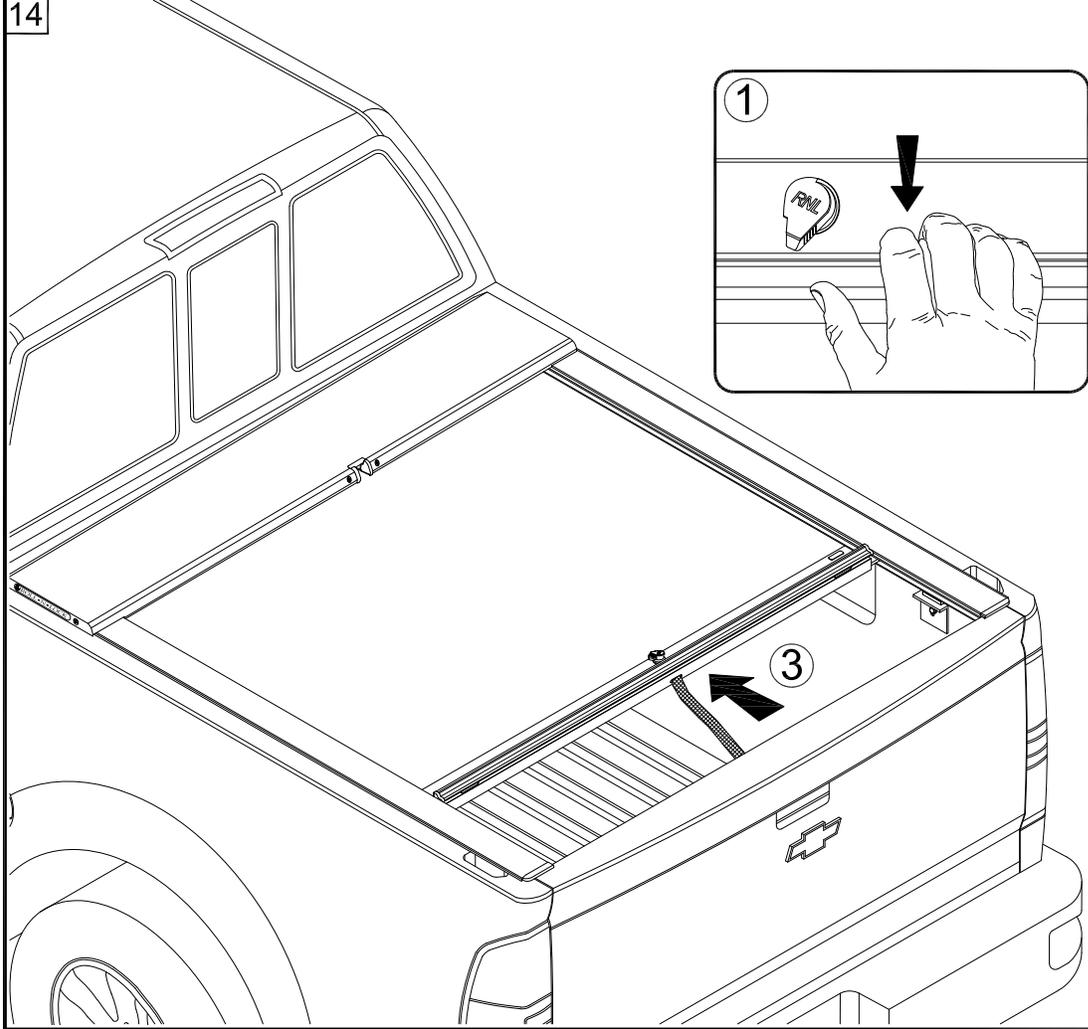





To open cover pull back on the handle, turn the lock to 10 o'clock and let the cover retract into the housing while holding onto the pull strap.

15 LHS = RHS


Attach the Cargo Shield © with the slots at the bottom to the housing. Note washer placement.

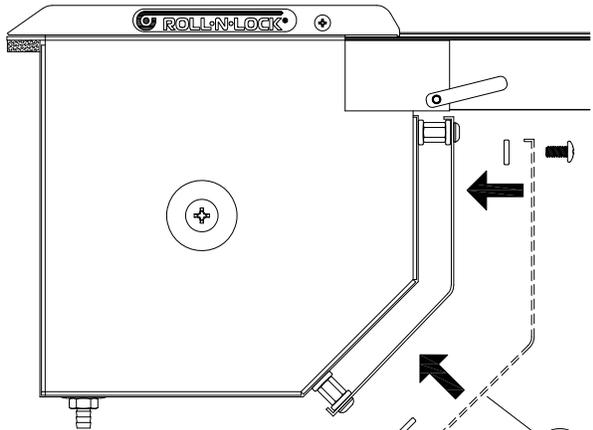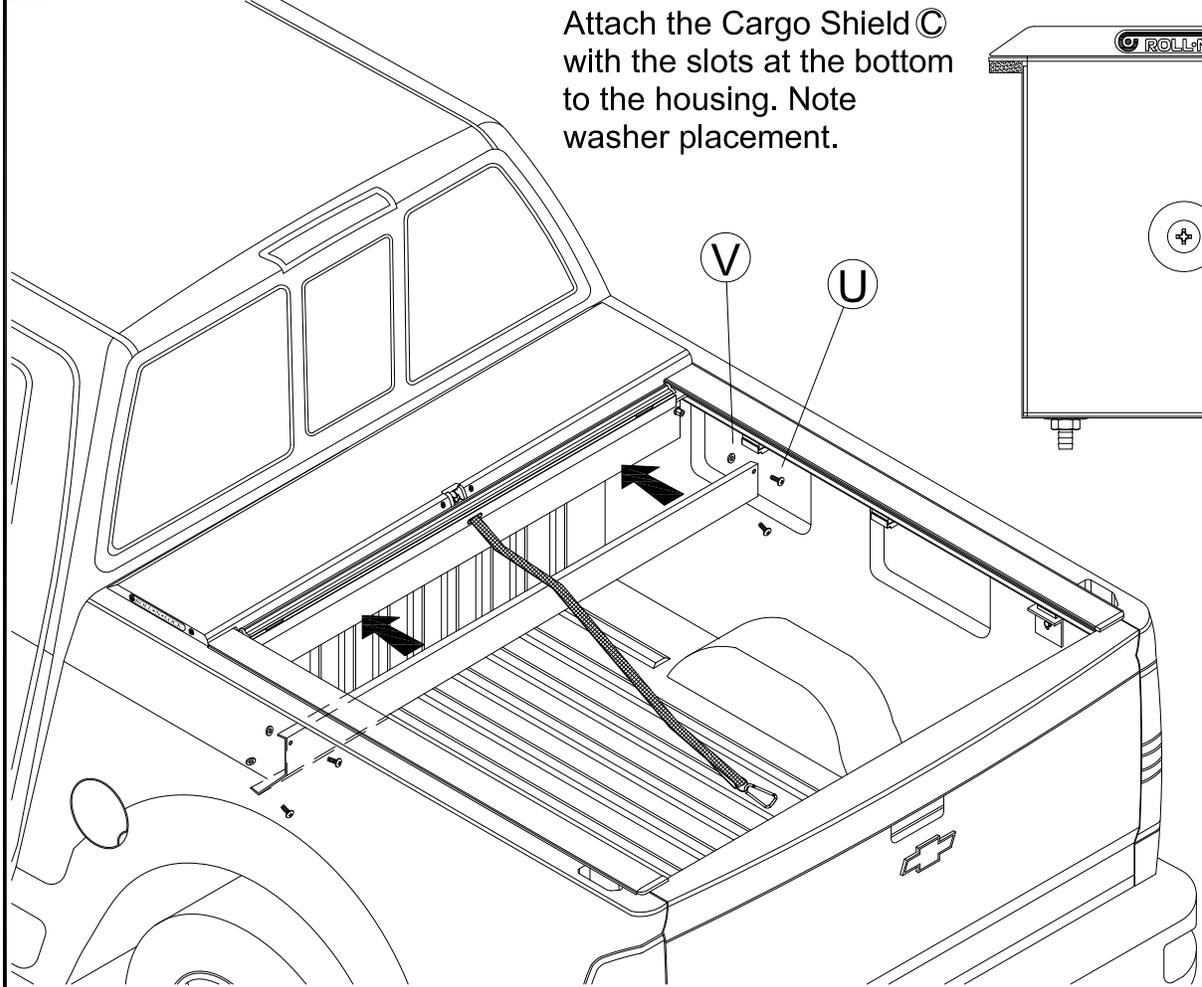

Drill 1/2" hole through bulkhead as shown. **DO NOT** drill through the truck cab. Insert one end of the drain tube **E** through the drilled 1/2" hole and feed towards the ground, insert the other end onto the housing fitting.

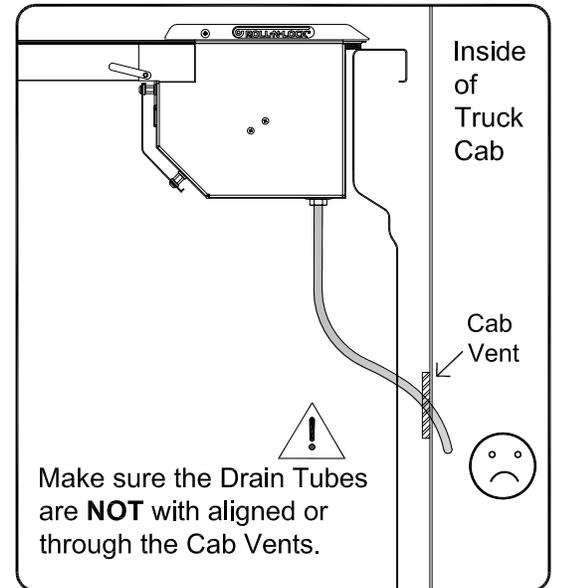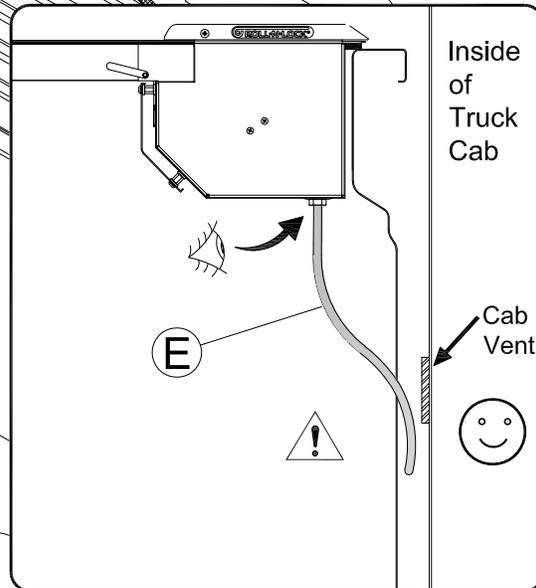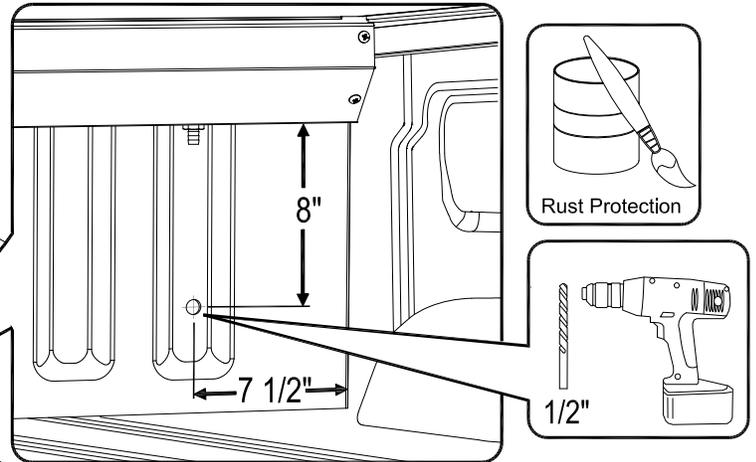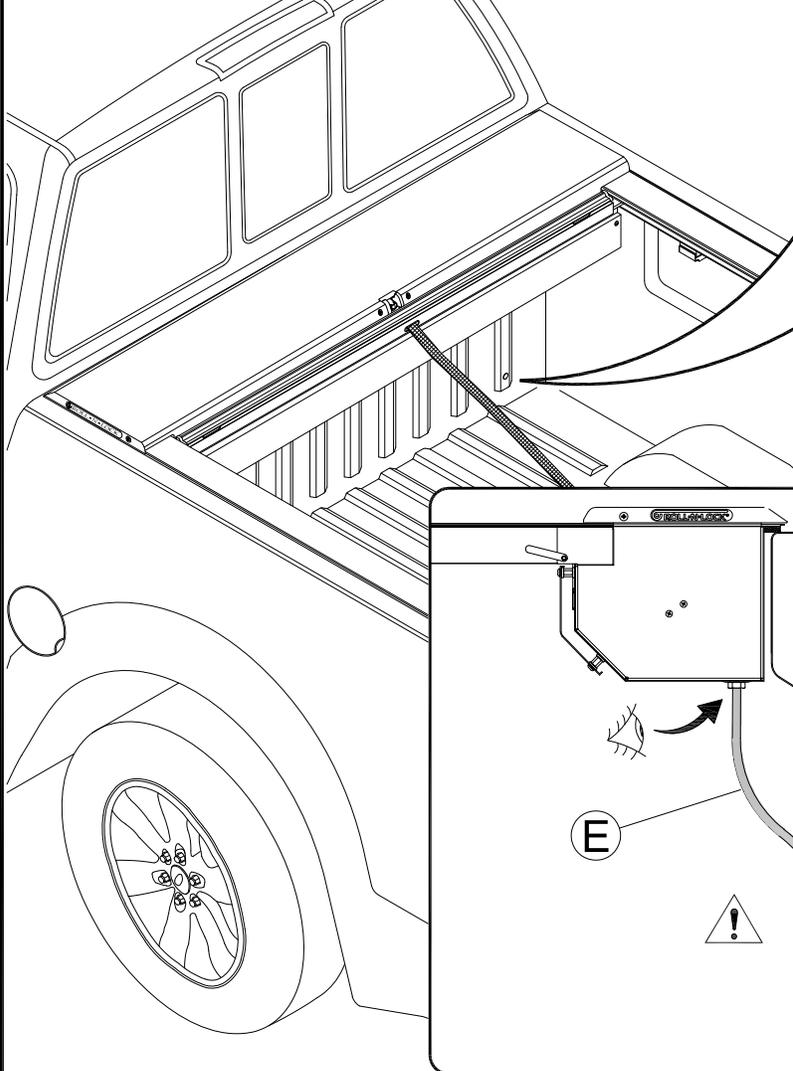

Attach pull-strap to the truck.

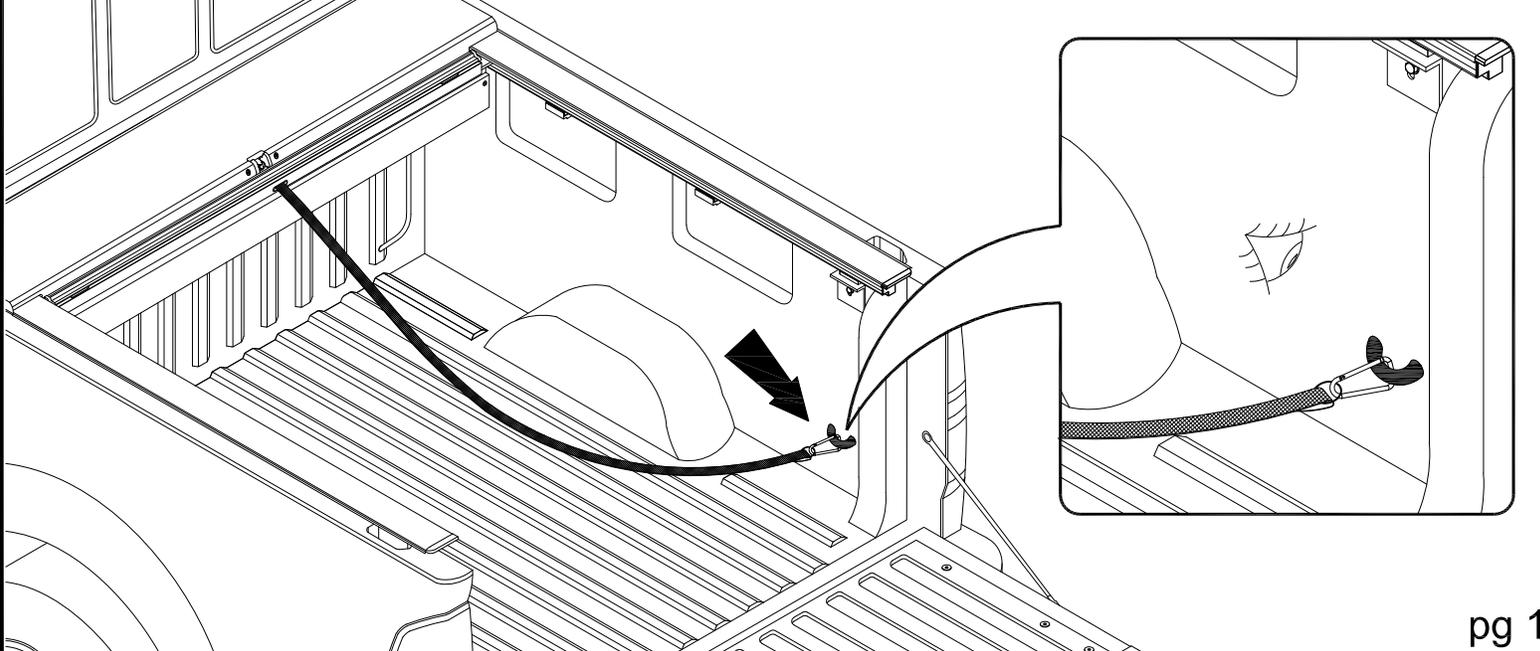


Troubleshooting

Cover is hard to pull or retract.




Spray 303[®] on a rag and wipe the top gasket in the Track back and forth.

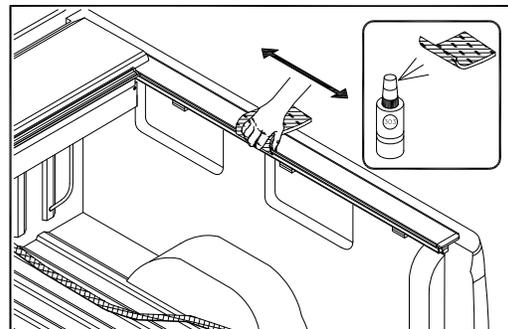

Cover does not latch.




Check Track to Track measurement.

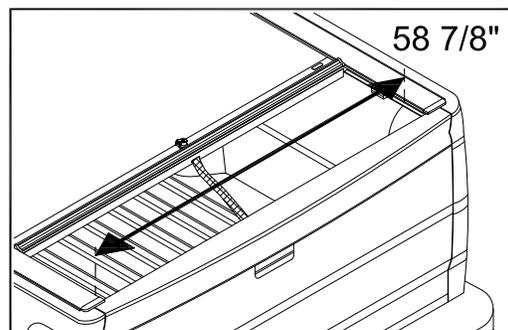

Track tips up or down.




Use shim(s) behind bracket to level Track.

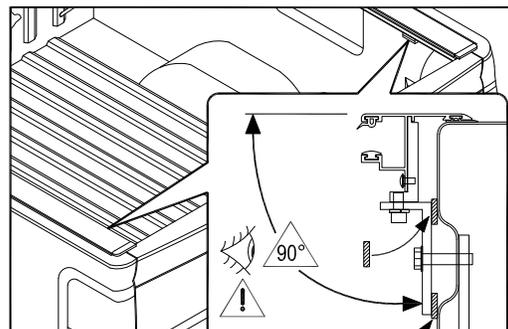

Cover does not reach tailgate.



Make sure Tracks are back against tailgate.




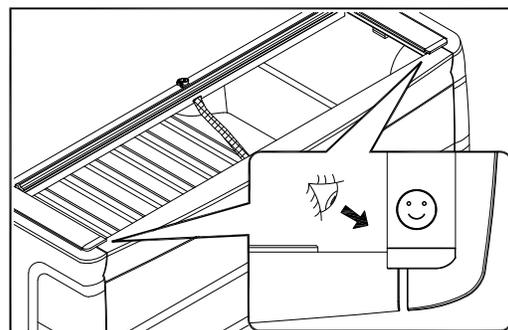


Any questions please call Customer Service at 800-952-7655
or email customerservice@rollnlock.com

IF TRUCK IS EQUIPPED WITH THE MULTI-PRO STEP PROCEED WITH PAGES 16-27


1 LHS = RHS

Assemble the Housing Bracket (D), insert as shown, level and tighten.

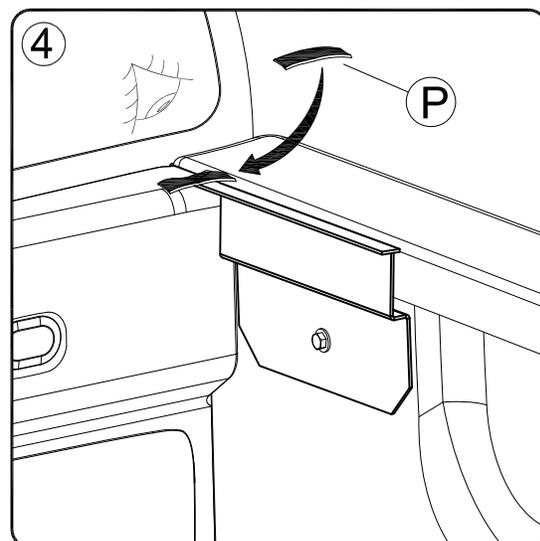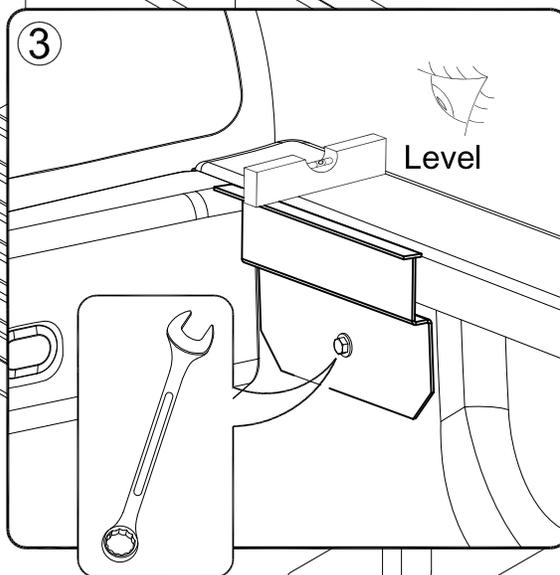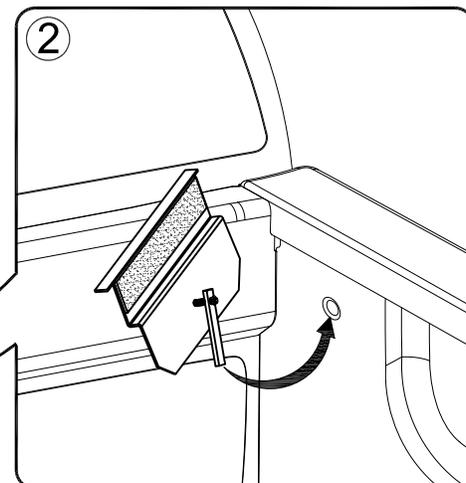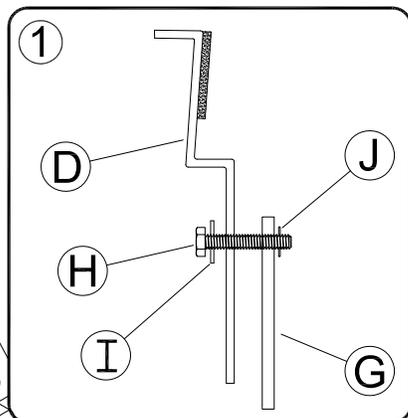


2 LHS = RHS

Center the Housing (A) between the bed rails up against the bulkhead.

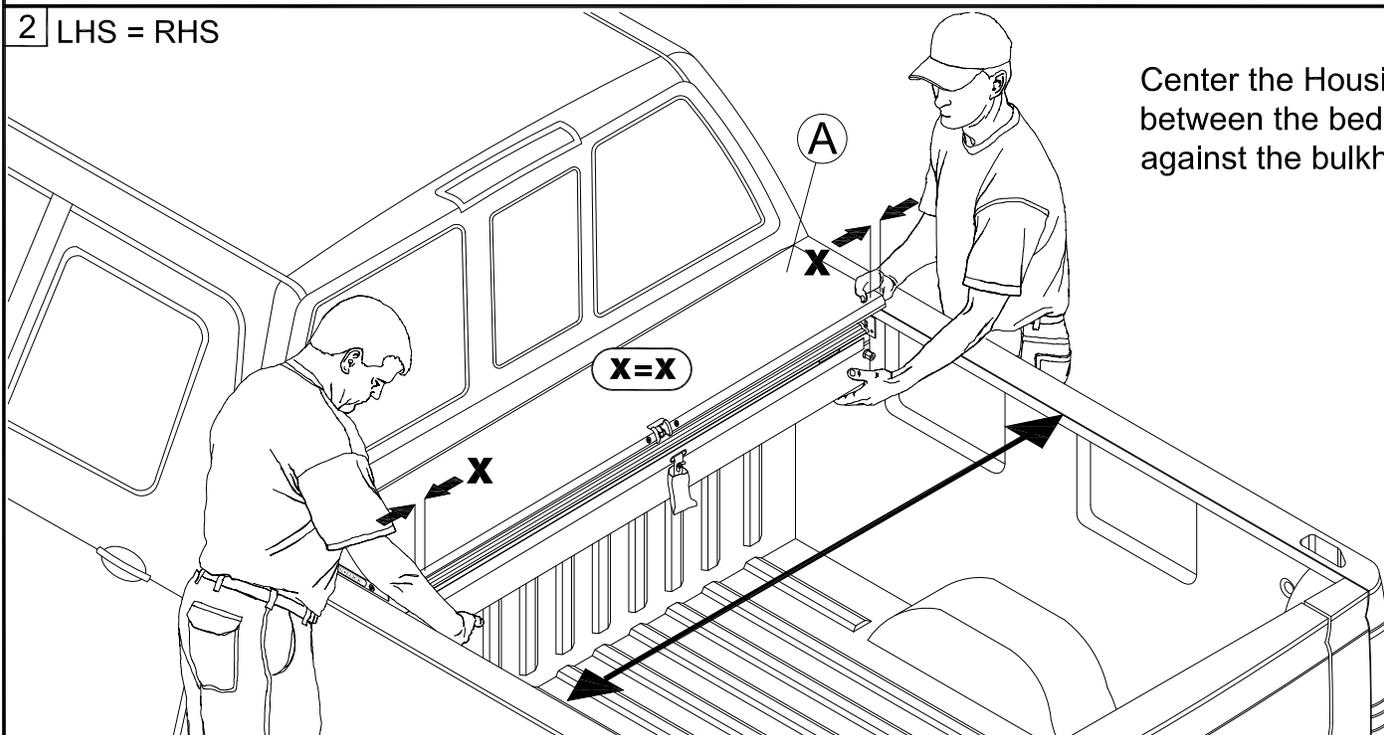

3 LHS = RHS


Remove Lid.

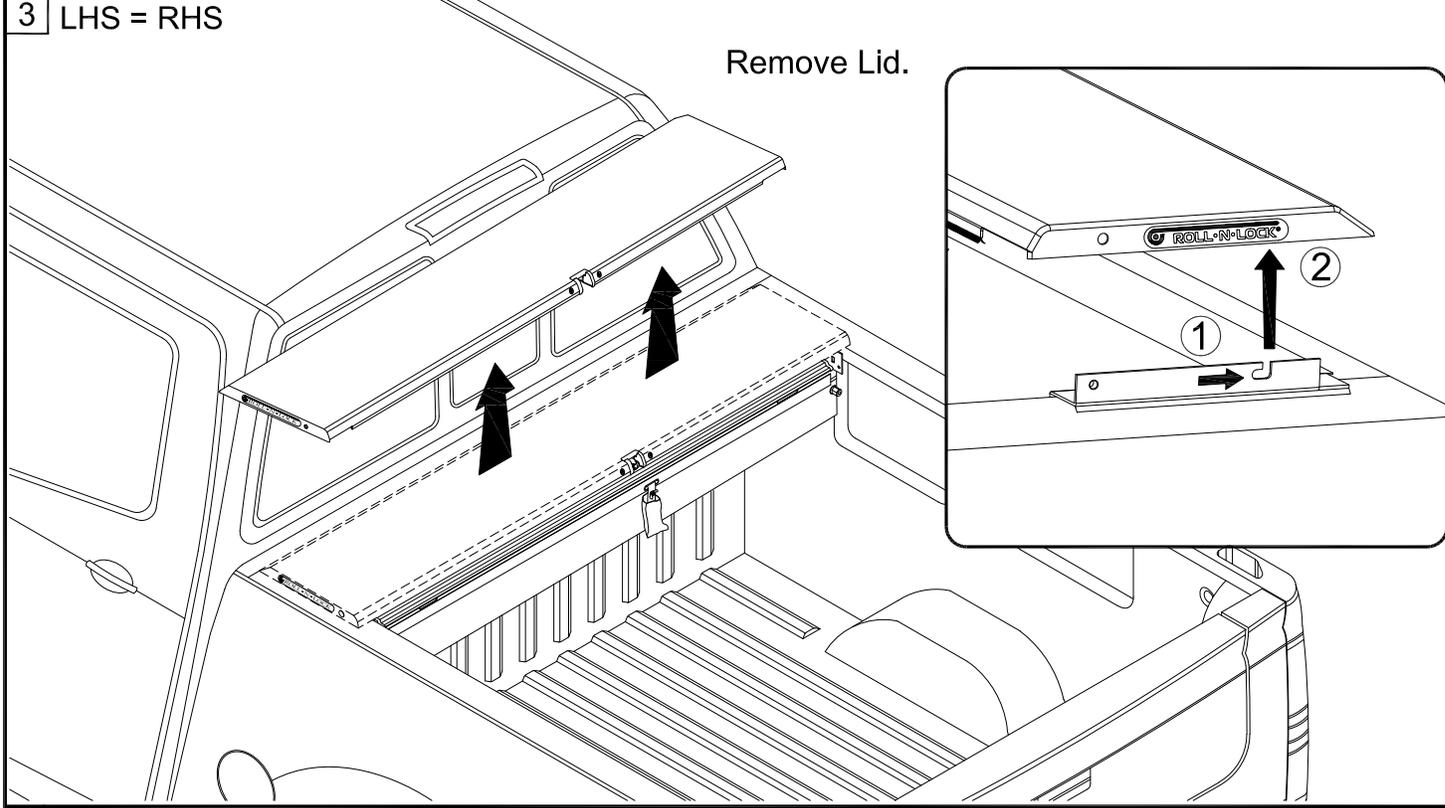


4 LHS ONLY

Remove back track clamp and break away tab.

DRIVERS SIDE TRACK ONLY




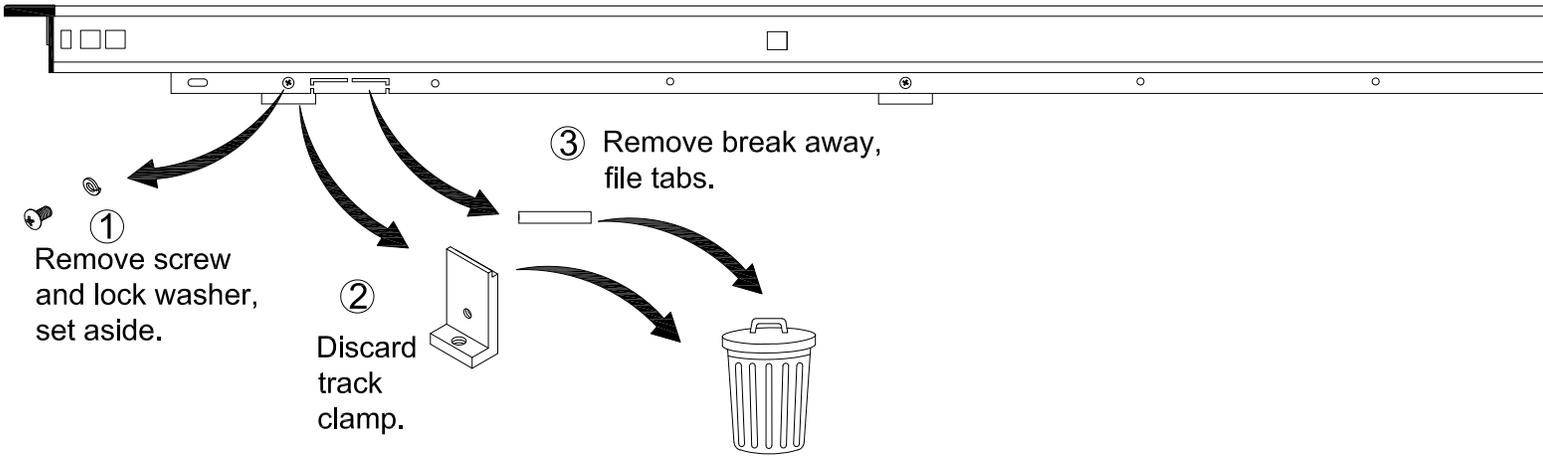


Key supplied track clamp bracket (AA) onto the back of the track at the slotted hole. Using the same screw and washer that was removed loosely attach bracket to track.

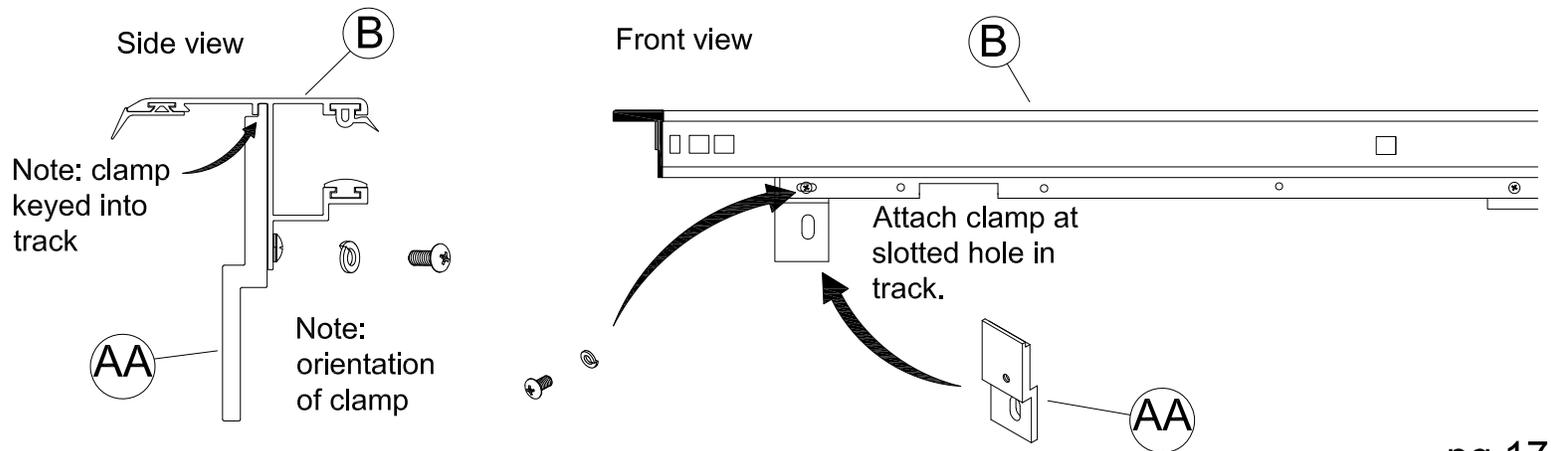



5 RHS ONLY

Assemble the track bracket (F), insert as shown and loosely attach.

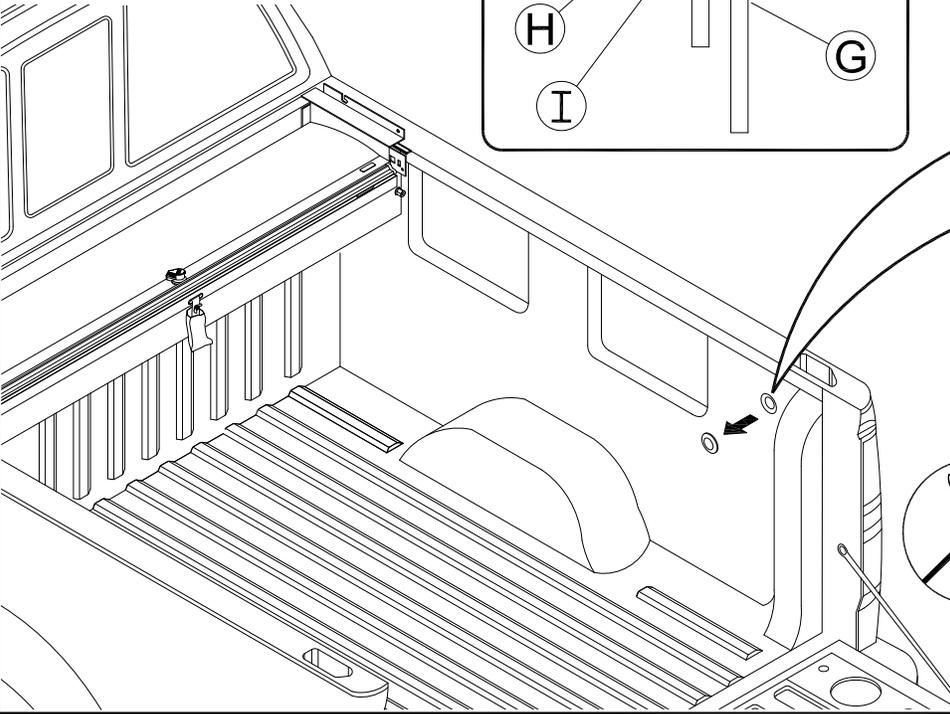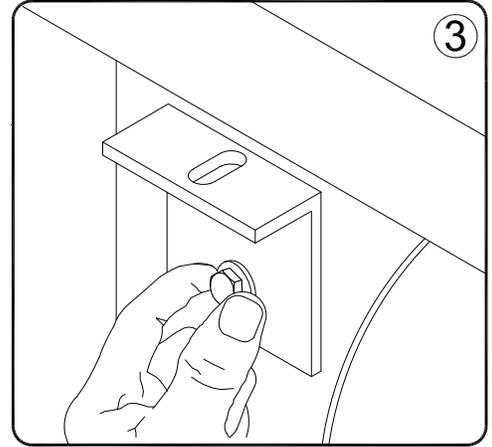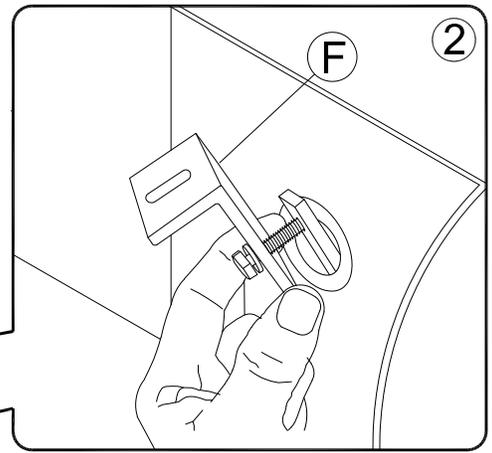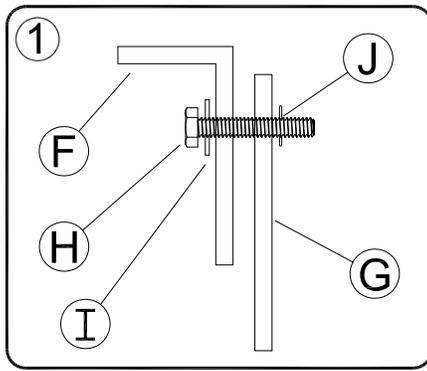


6 LHS ONLY

Remove nut and washer from the top of the step handle bracket.

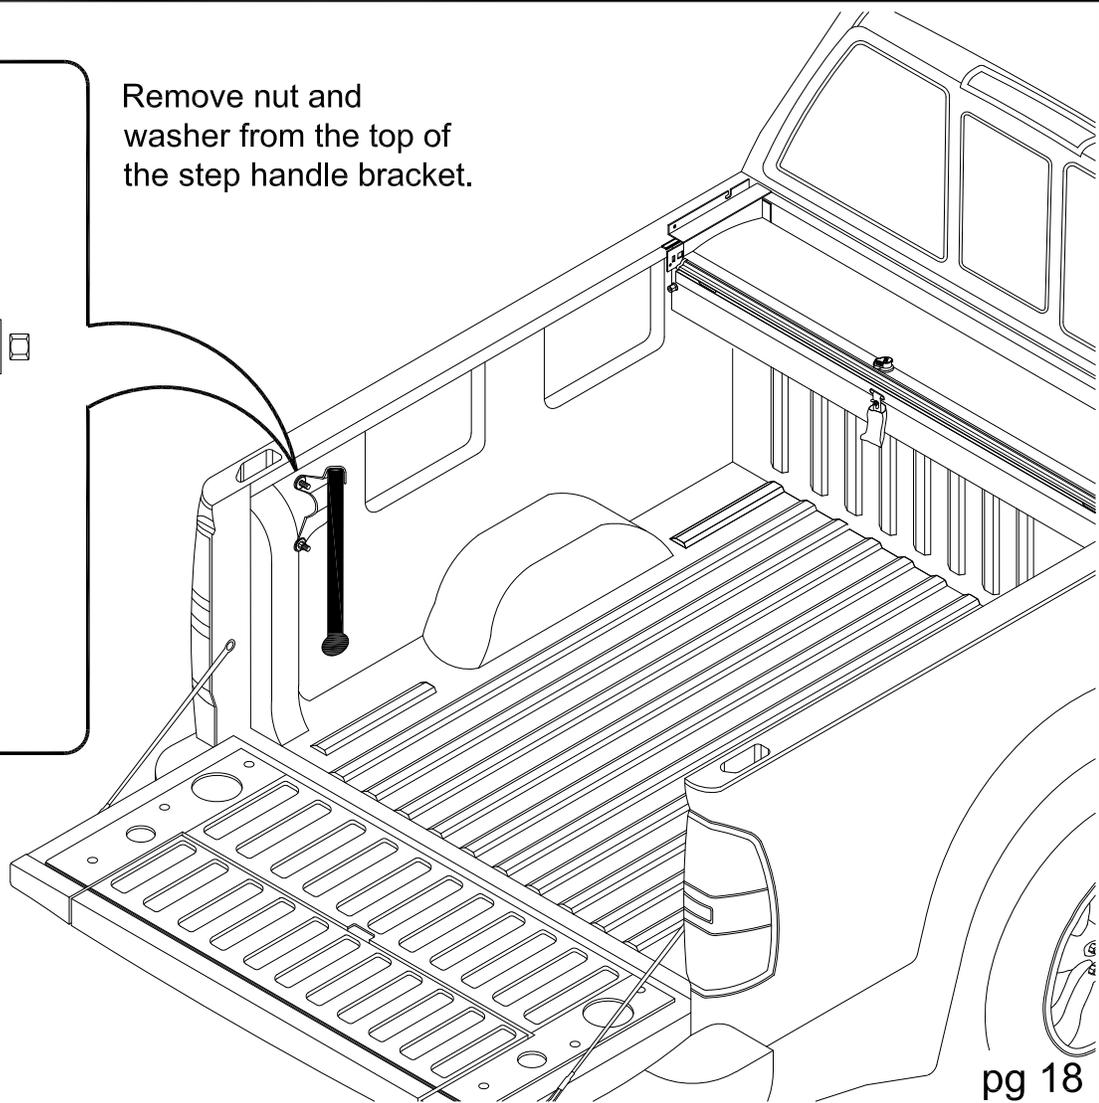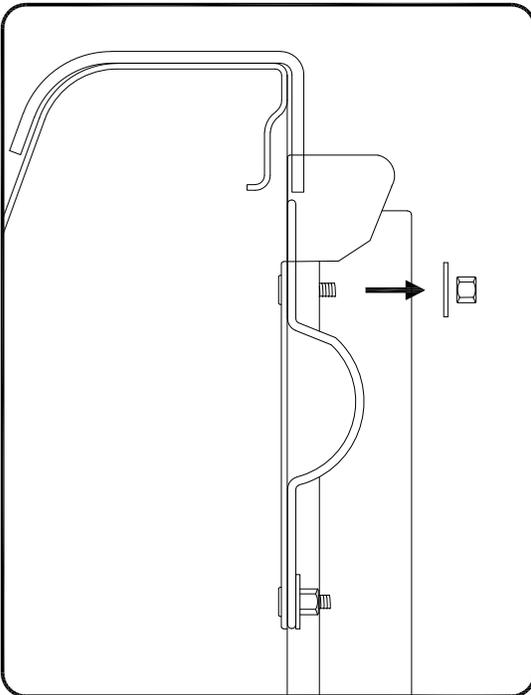


7 LHS=RHS

Turn lock to 10 o'clock, key
Tracks **B** onto housing stems.
Do **not** remove plastic wing nut.

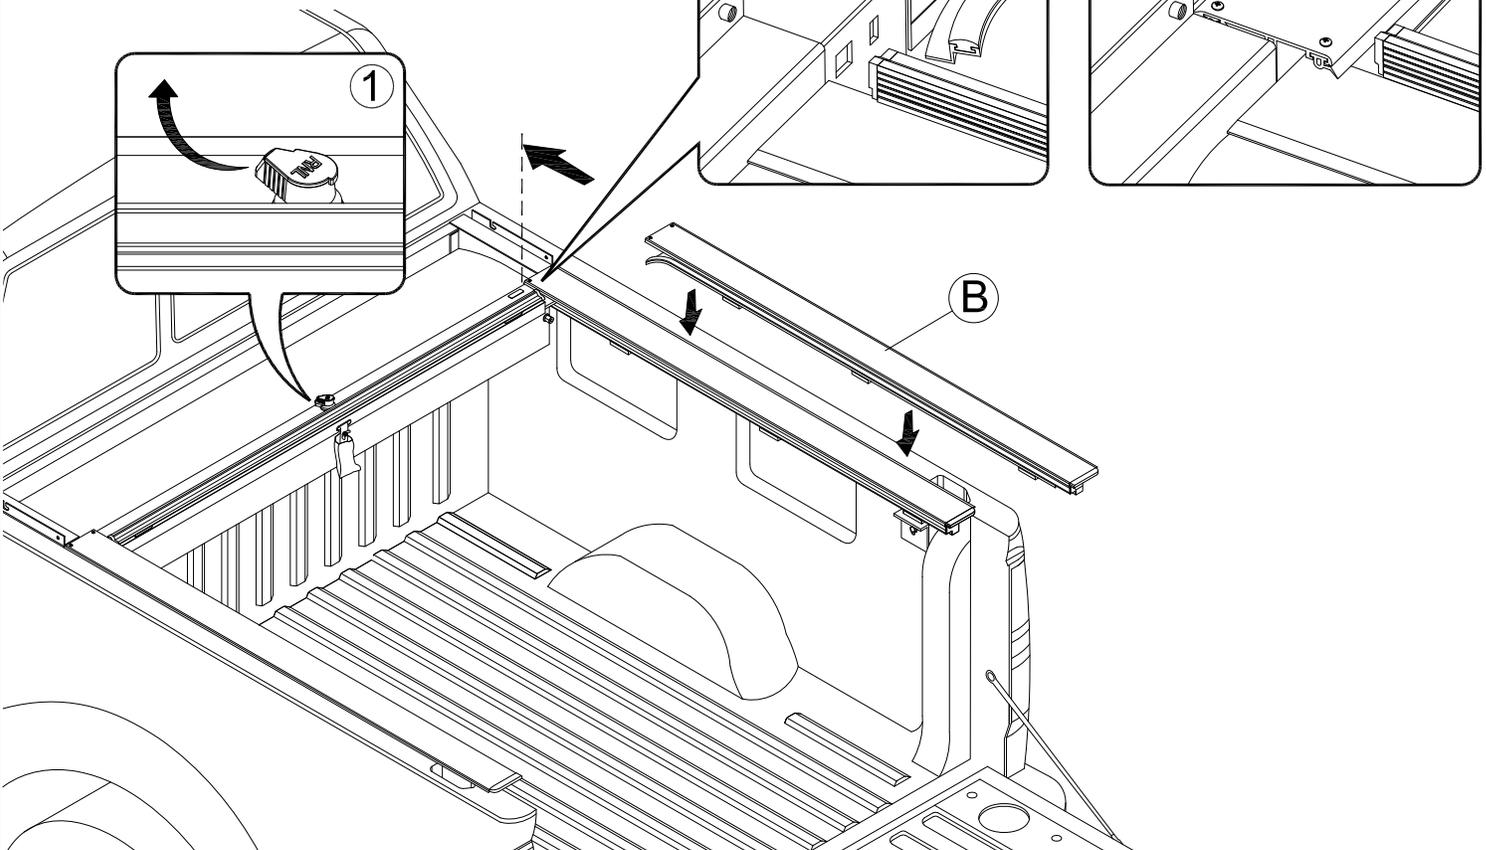





8 LHS ONLY

Key slot on track bracket **Z**
over screw on Multi Pro-Step
handle bracket, replace nut
and washer loosely.



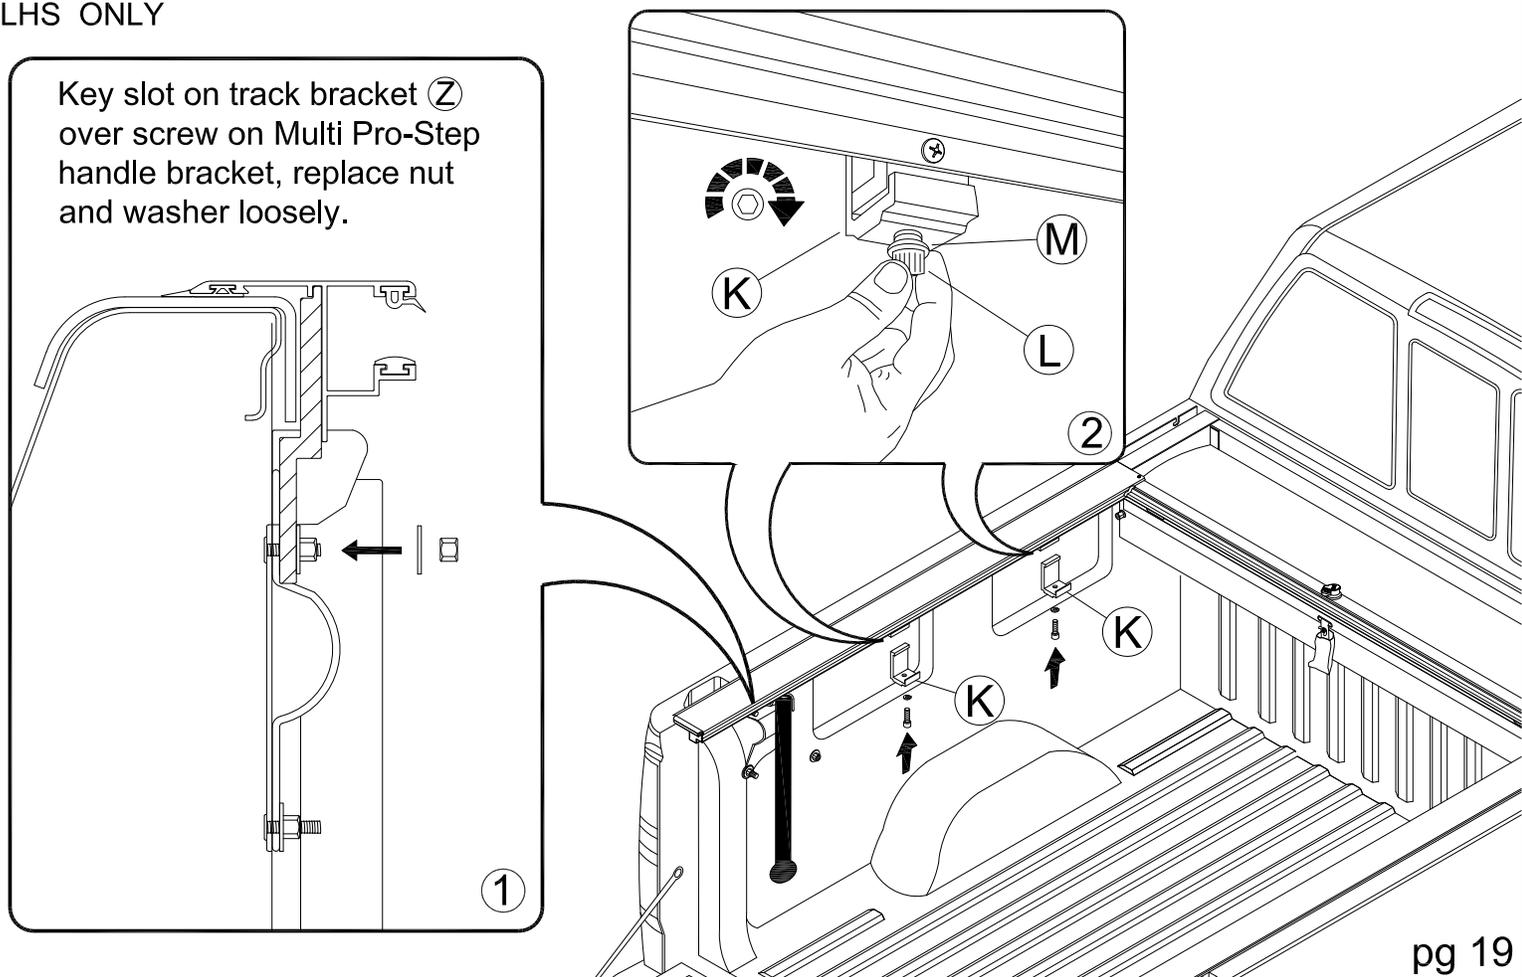


9 RHS ONLY

Loosely attach the Track Bracket (F) and Bed Clamps (K) to the track clamps.

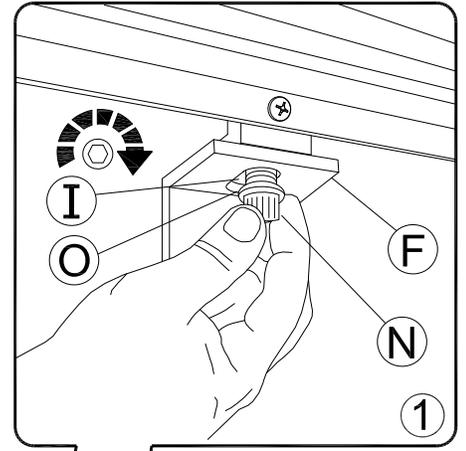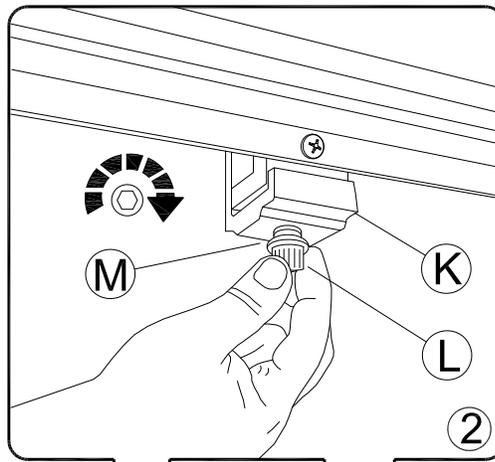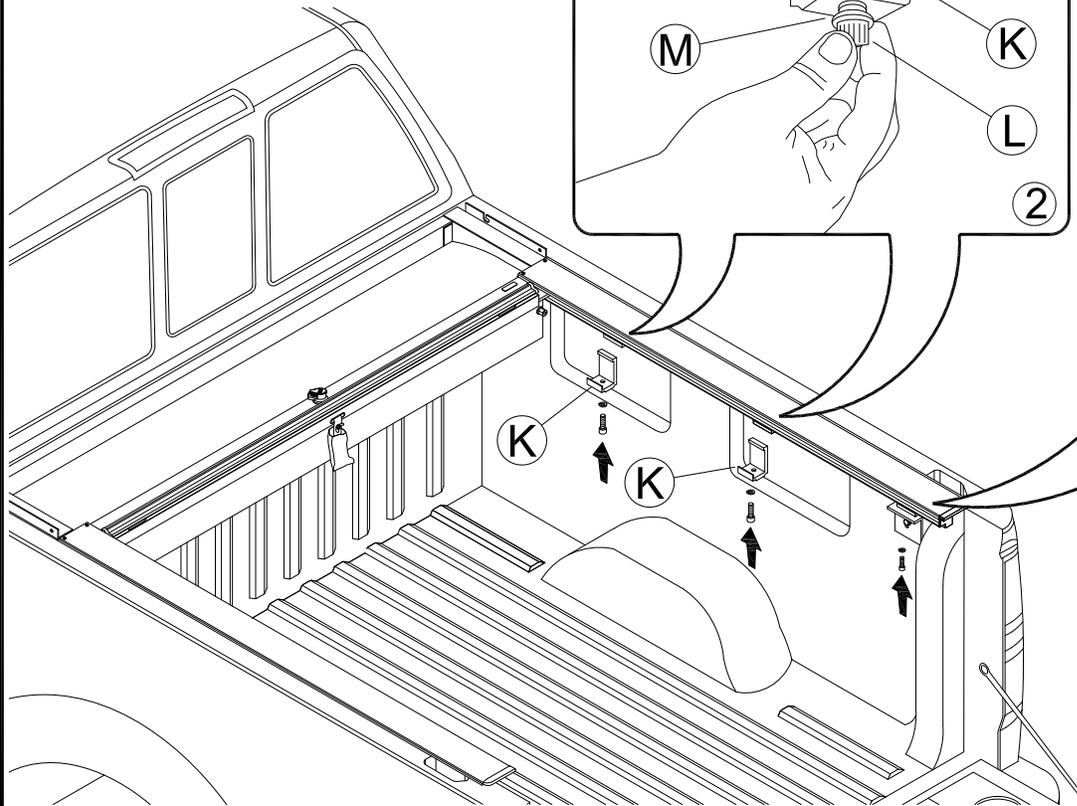


10 LHS = RHS

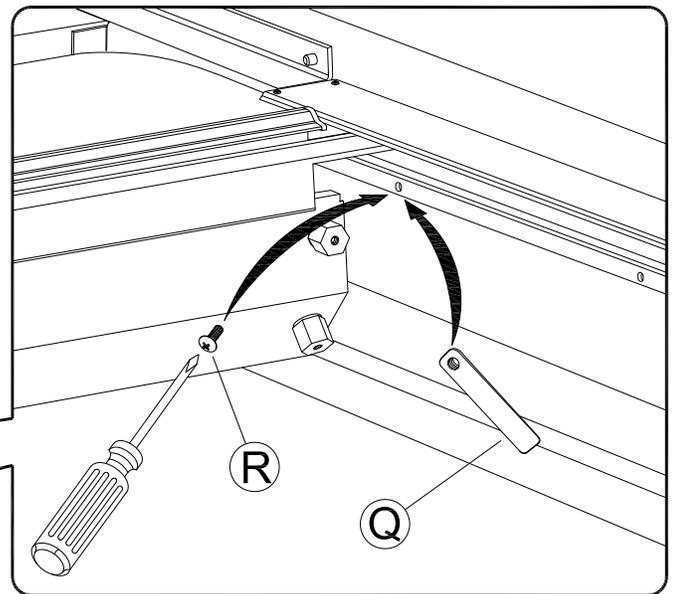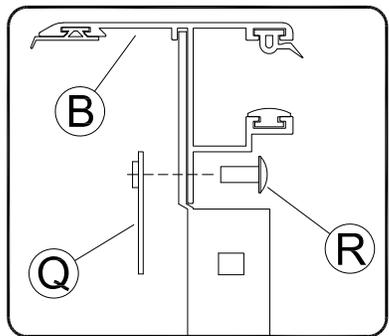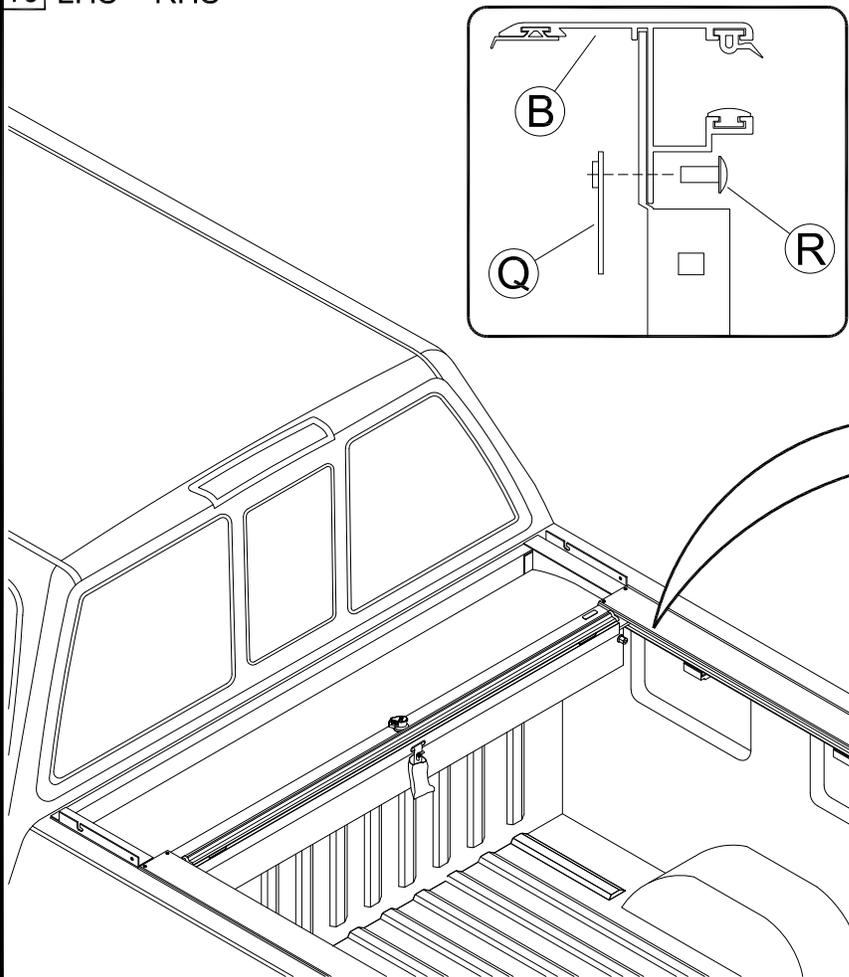

Secure Tracks to housing stems.

11 LHS = RHS

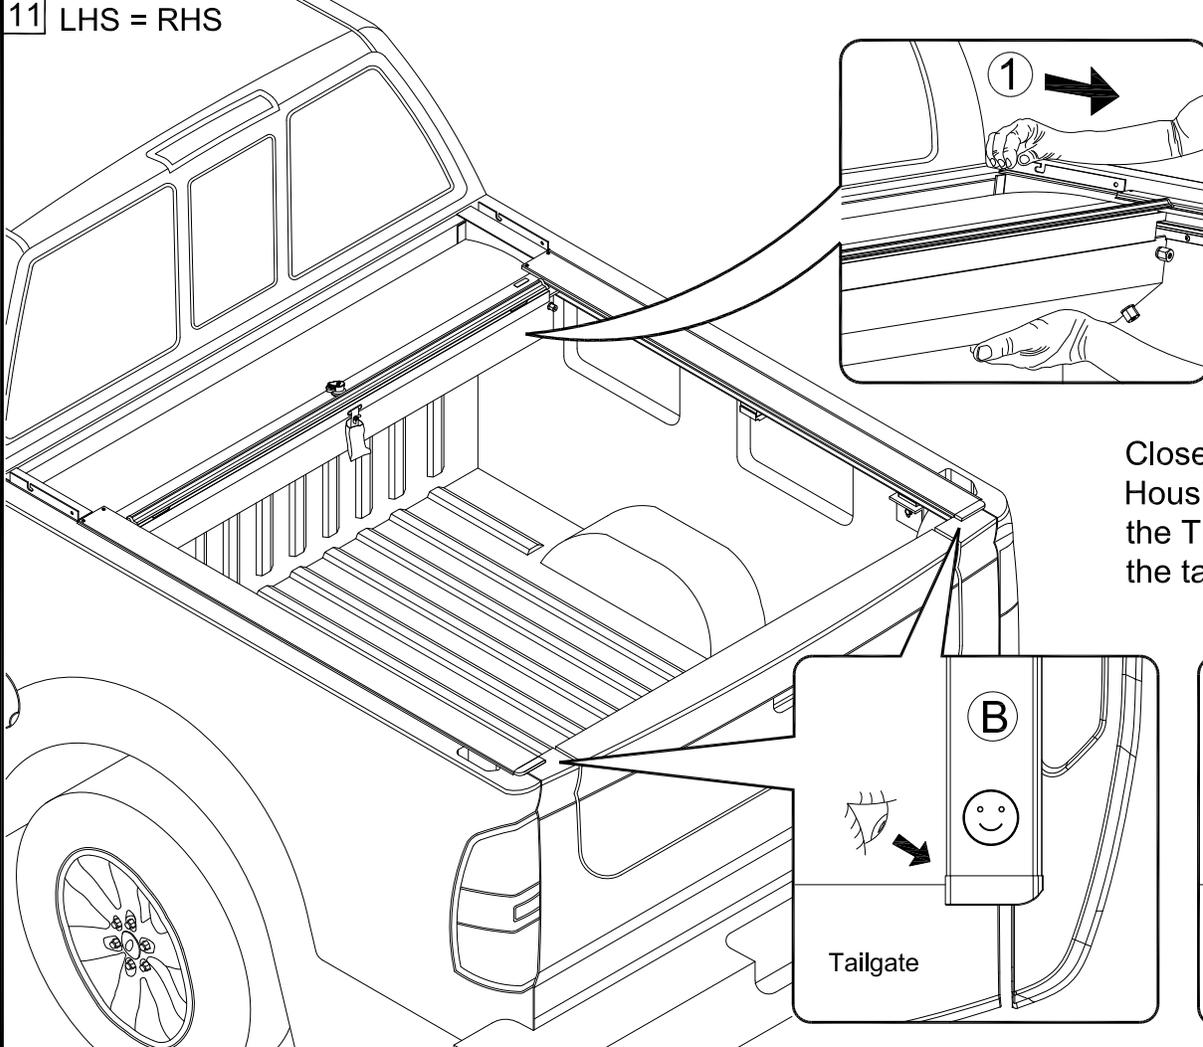

Close tailgate, shift the Housing back so the end of the Tracks are up against the tailgate.

B

Tailgate

Tailgate


12 LHS = RHS



Important to check track to track inside dimension, otherwise the cover will not latch properly.

58 7/8"

58 7/8"

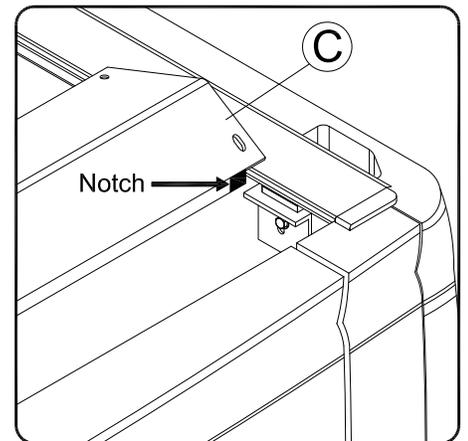


C




Use Cargo Shield notches to ensure correct spacing of tracks.

13 LHS ONLY


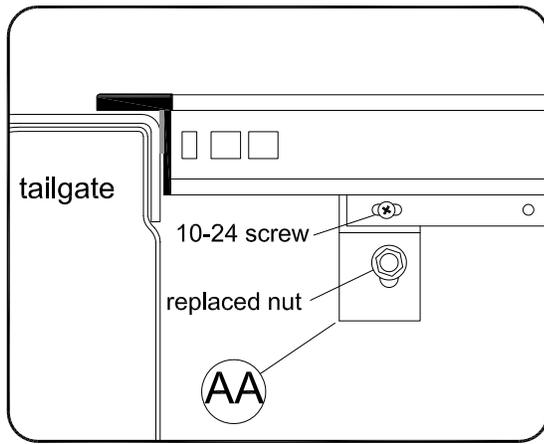


With track correctly back against tailgate tighten 10-24 screw. Adjust track to correct height and tighten nut.

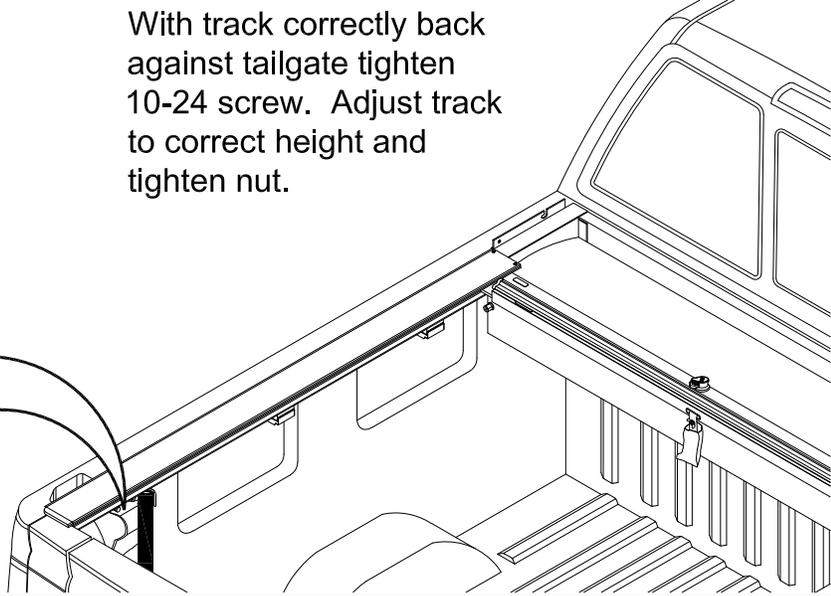

14 RHS ONLY

Once tracks are correctly spaced and adjusted to the correct height tighten fasteners at back clamp.

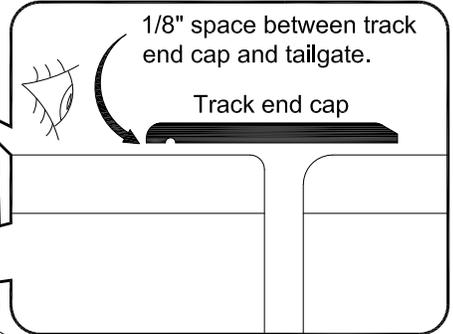
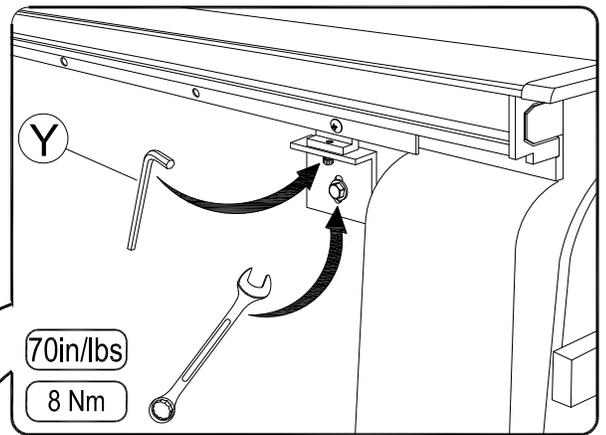


14a



58 7/8"

If needed:

- Use shim(s) **Z** in back of bracket to bring track in.
- Use shim(s) **T** to align the track to correct position.

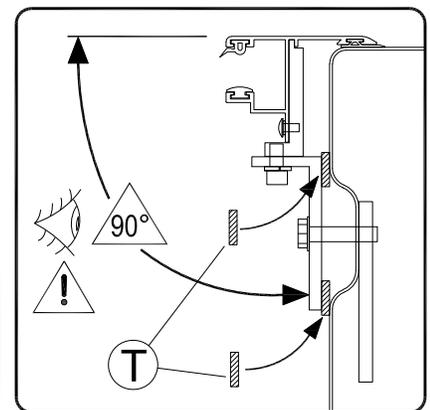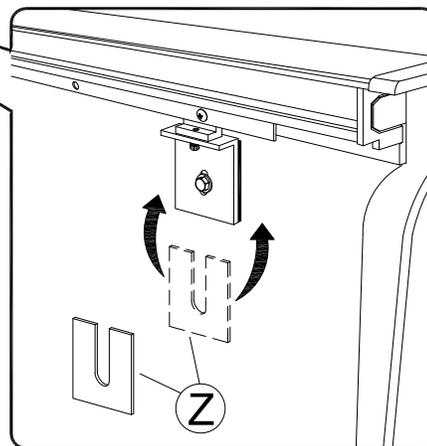





15 LHS = RHS

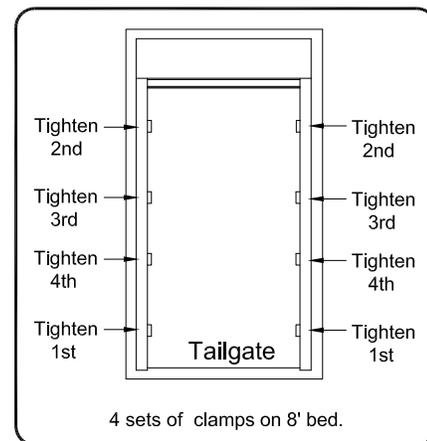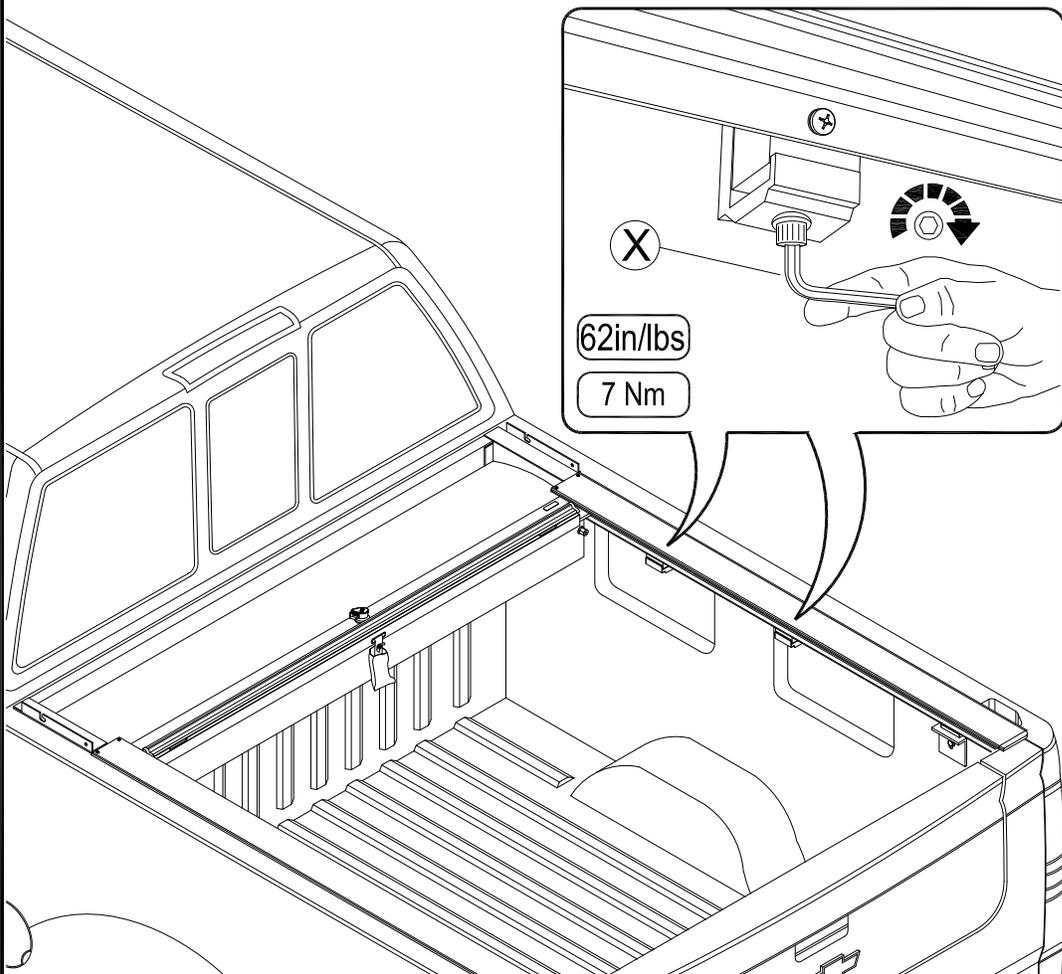

Tighten bed clamps to the track clamps. Note: When tight there may be a gap between the clamps, do not overtighten.




16 LHS = RHS

Turn lock to 7 o'clock, remove plastic wing nut and using both hands pull cover back to tailgate. Screw housing into housing bracket.

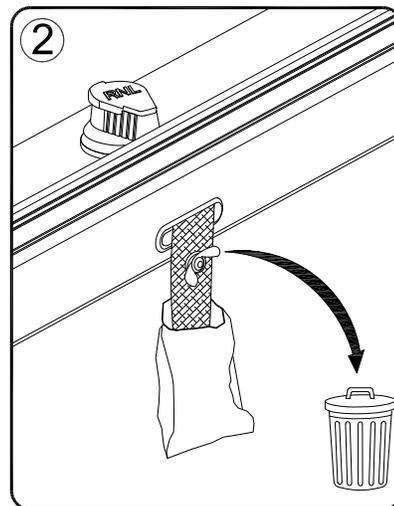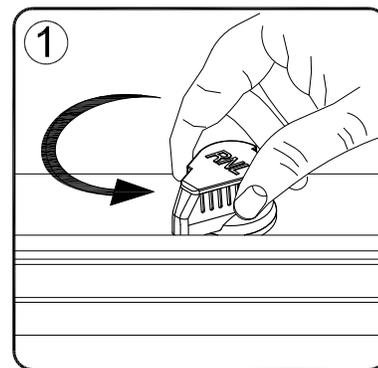
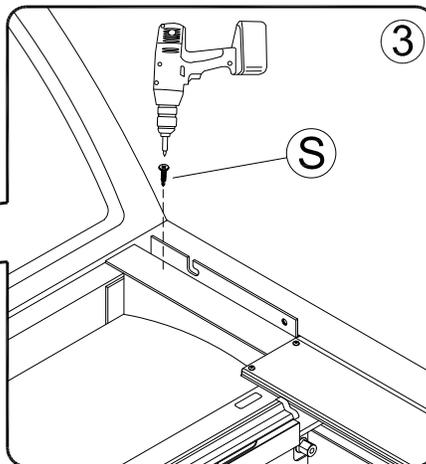
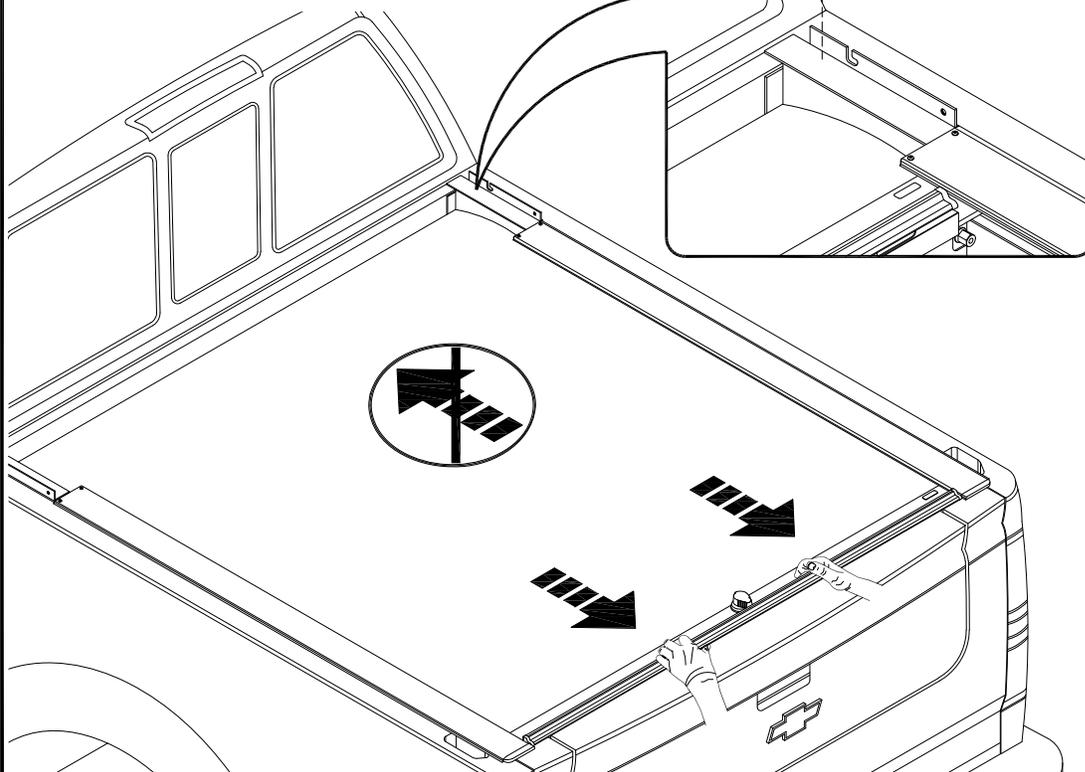


17 LHS = RHS

Replace lid.

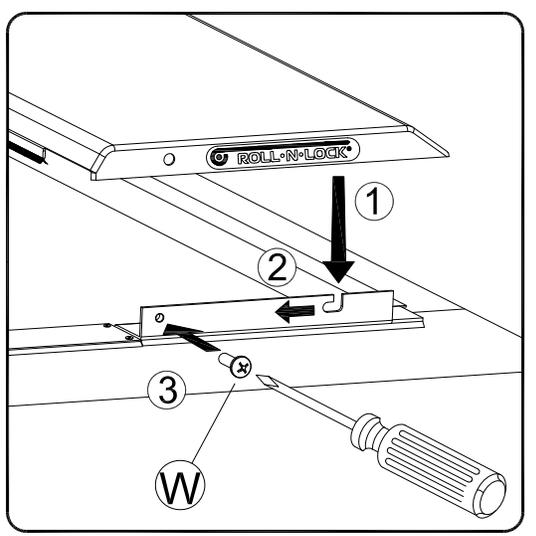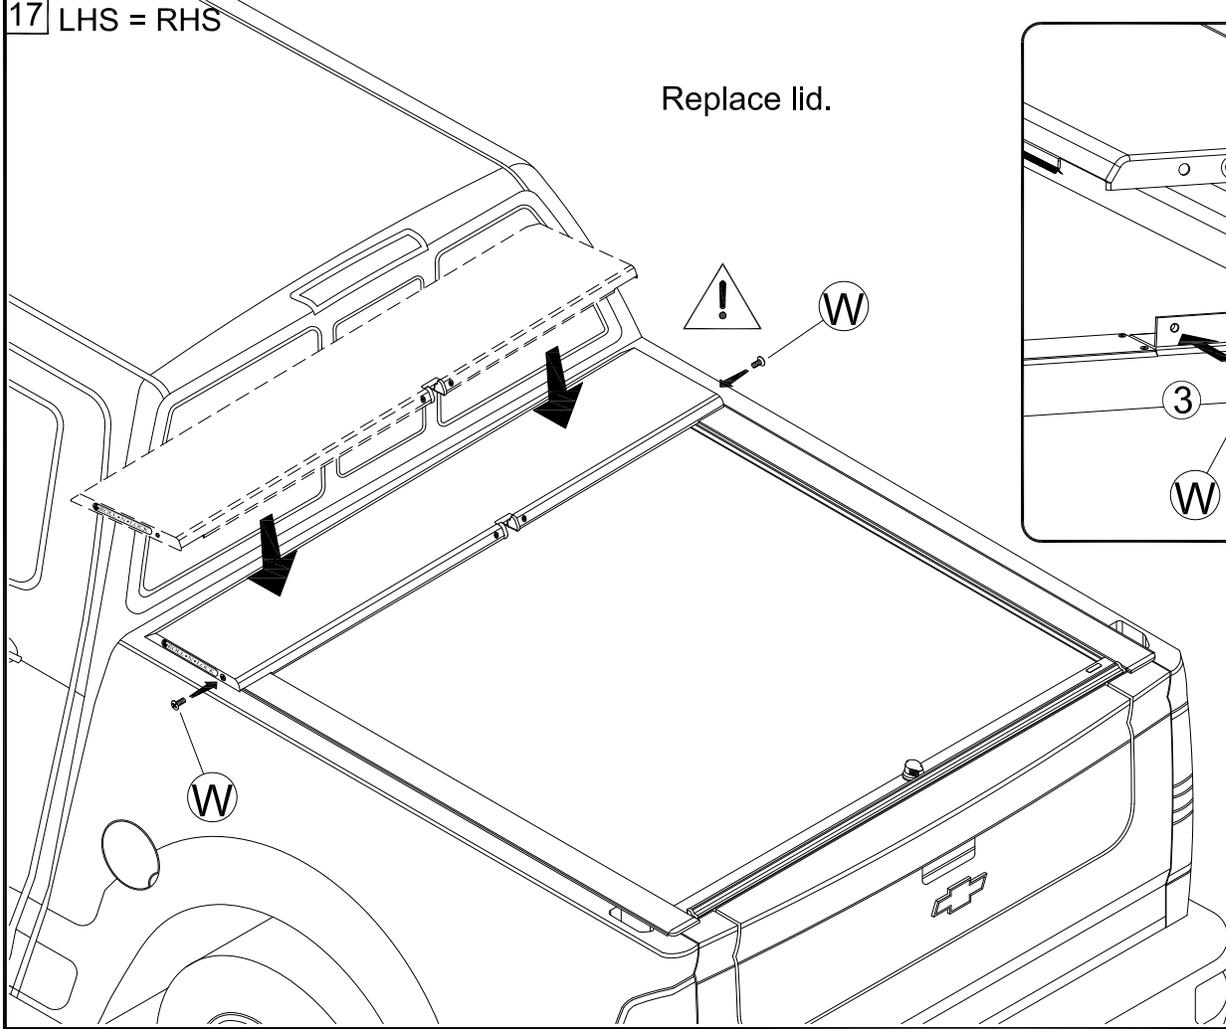



18 LHS = RHS

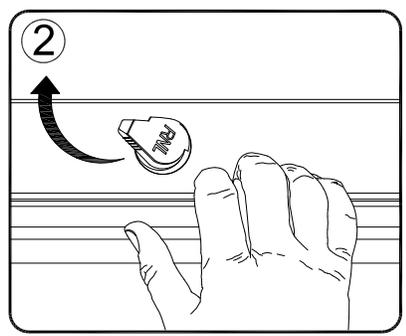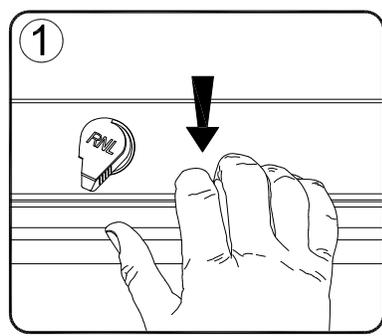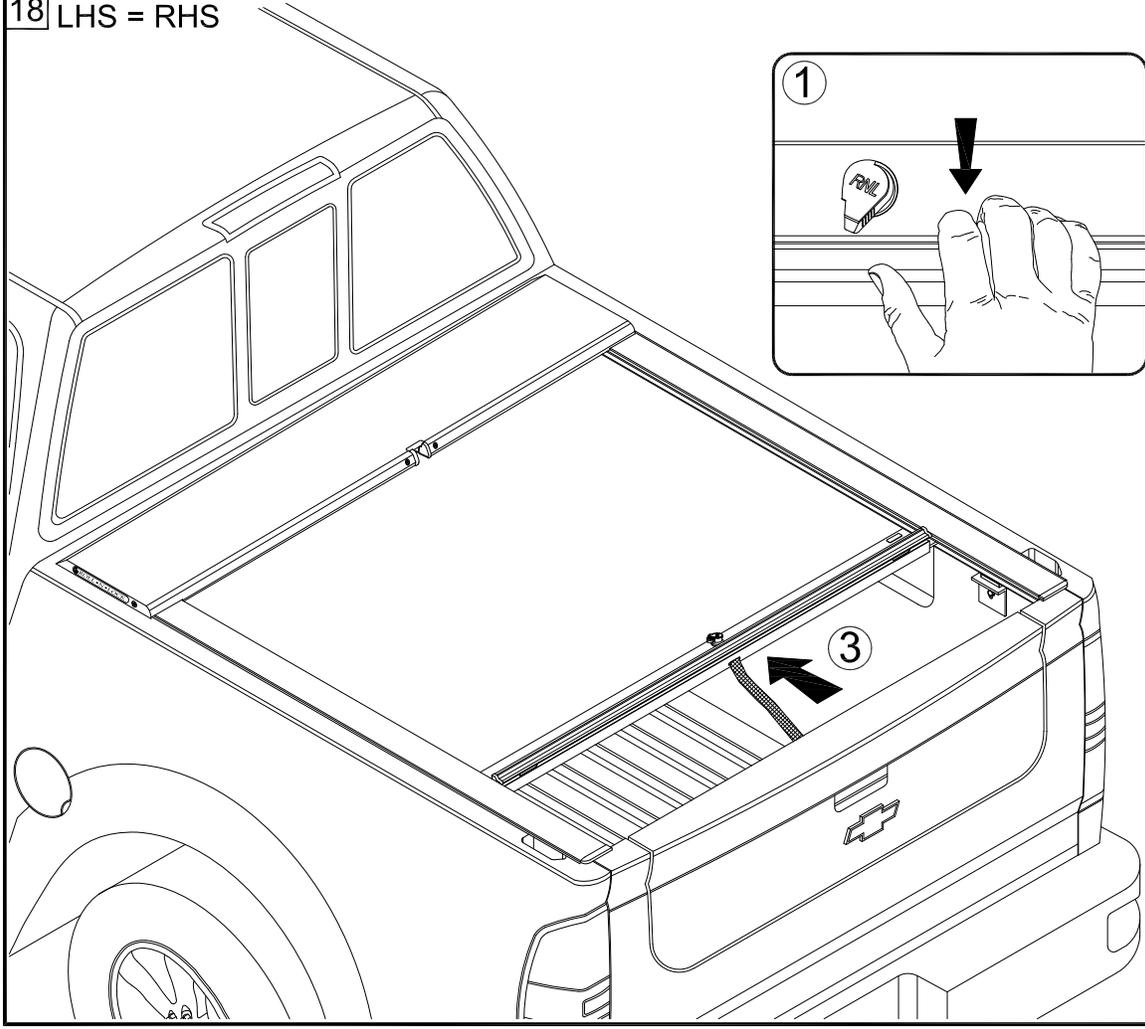

To open cover pull back on the handle, turn the lock to 10 o'clock and let the cover retract into the housing while holding onto the pull strap.






19 LHS = RHS

Attach the Cargo Shield **C** with slots at the bottom to the housing. Note washer placement.

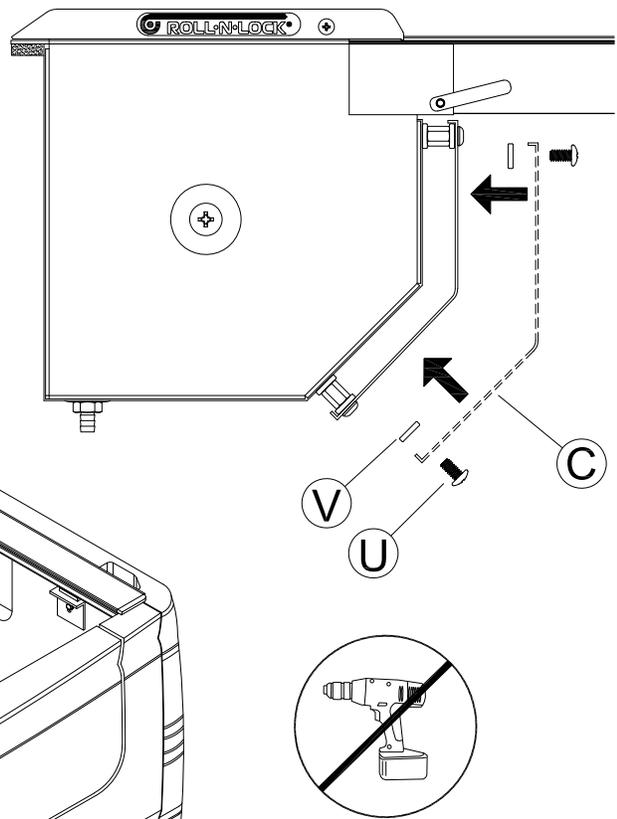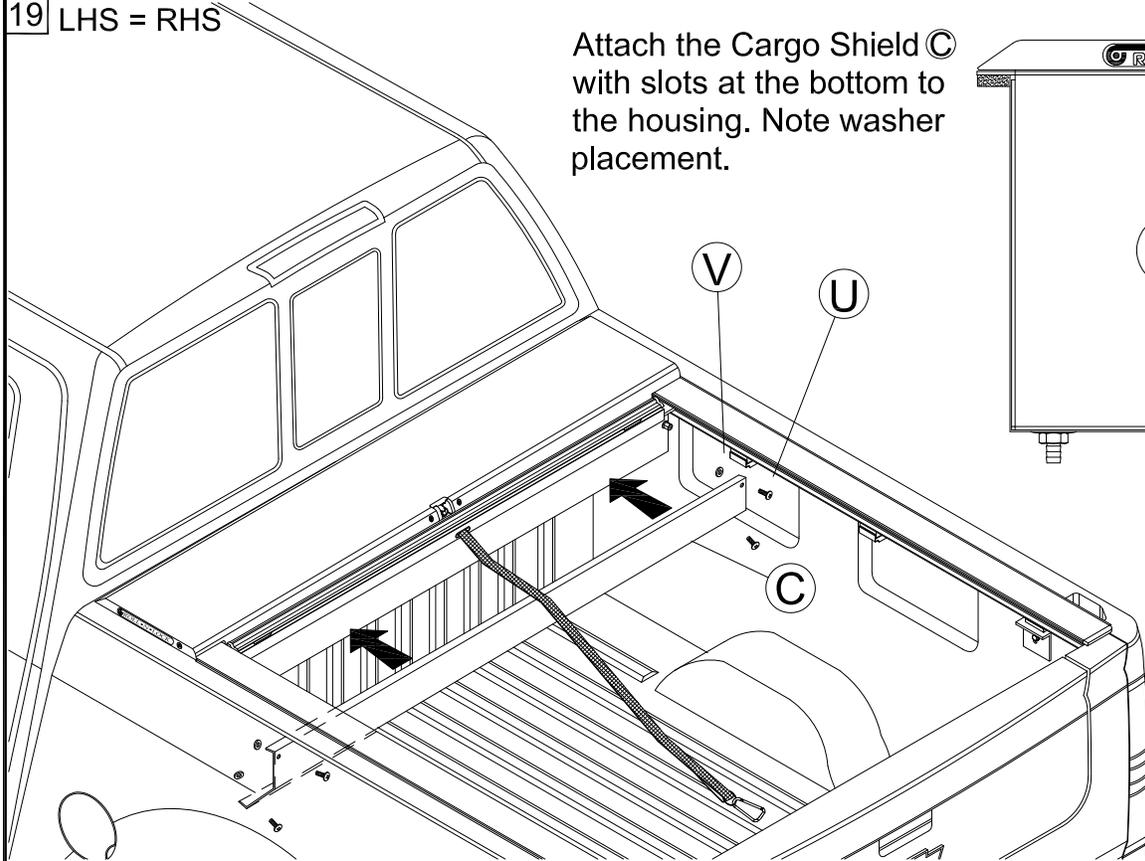


20 LHS = RHS

Drill 1/2" hole through bulkhead as shown. **DO NOT** drill through the truck cab. Insert one end of the drain tube **E** through the drilled 1/2" hole and feed towards the ground, insert the other end onto the housing fitting.

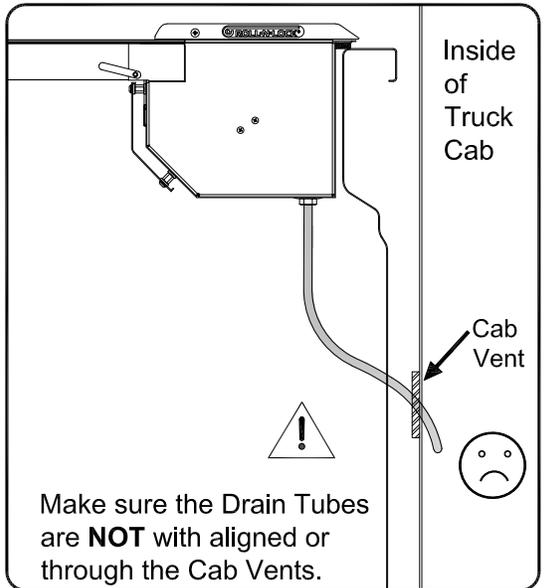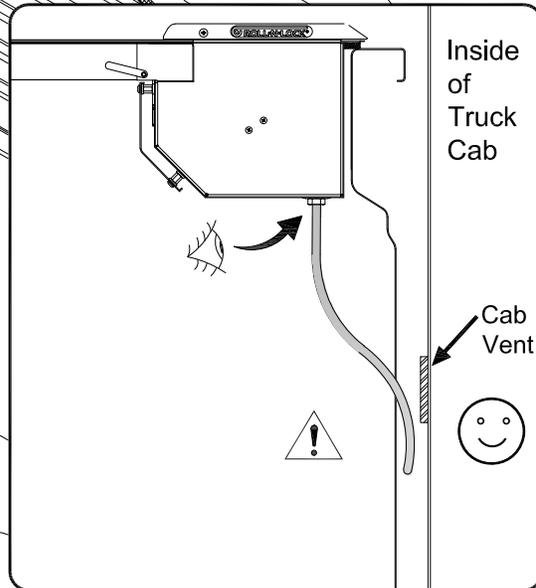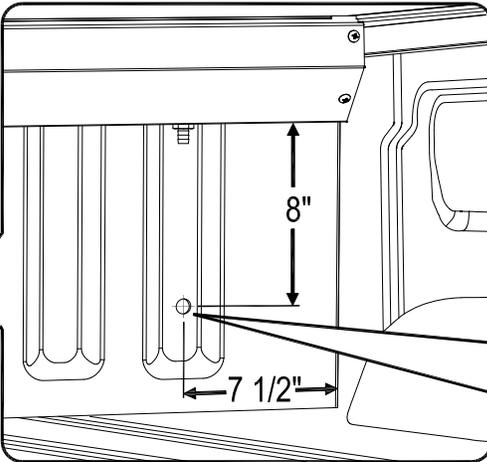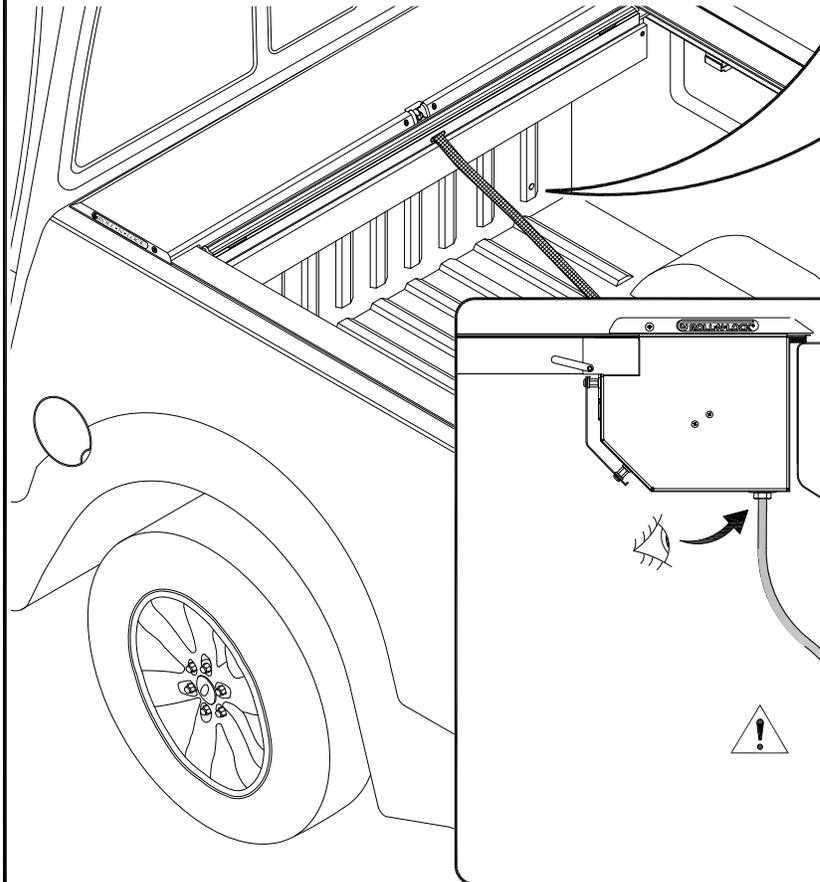

Attach pull-strap to the truck.

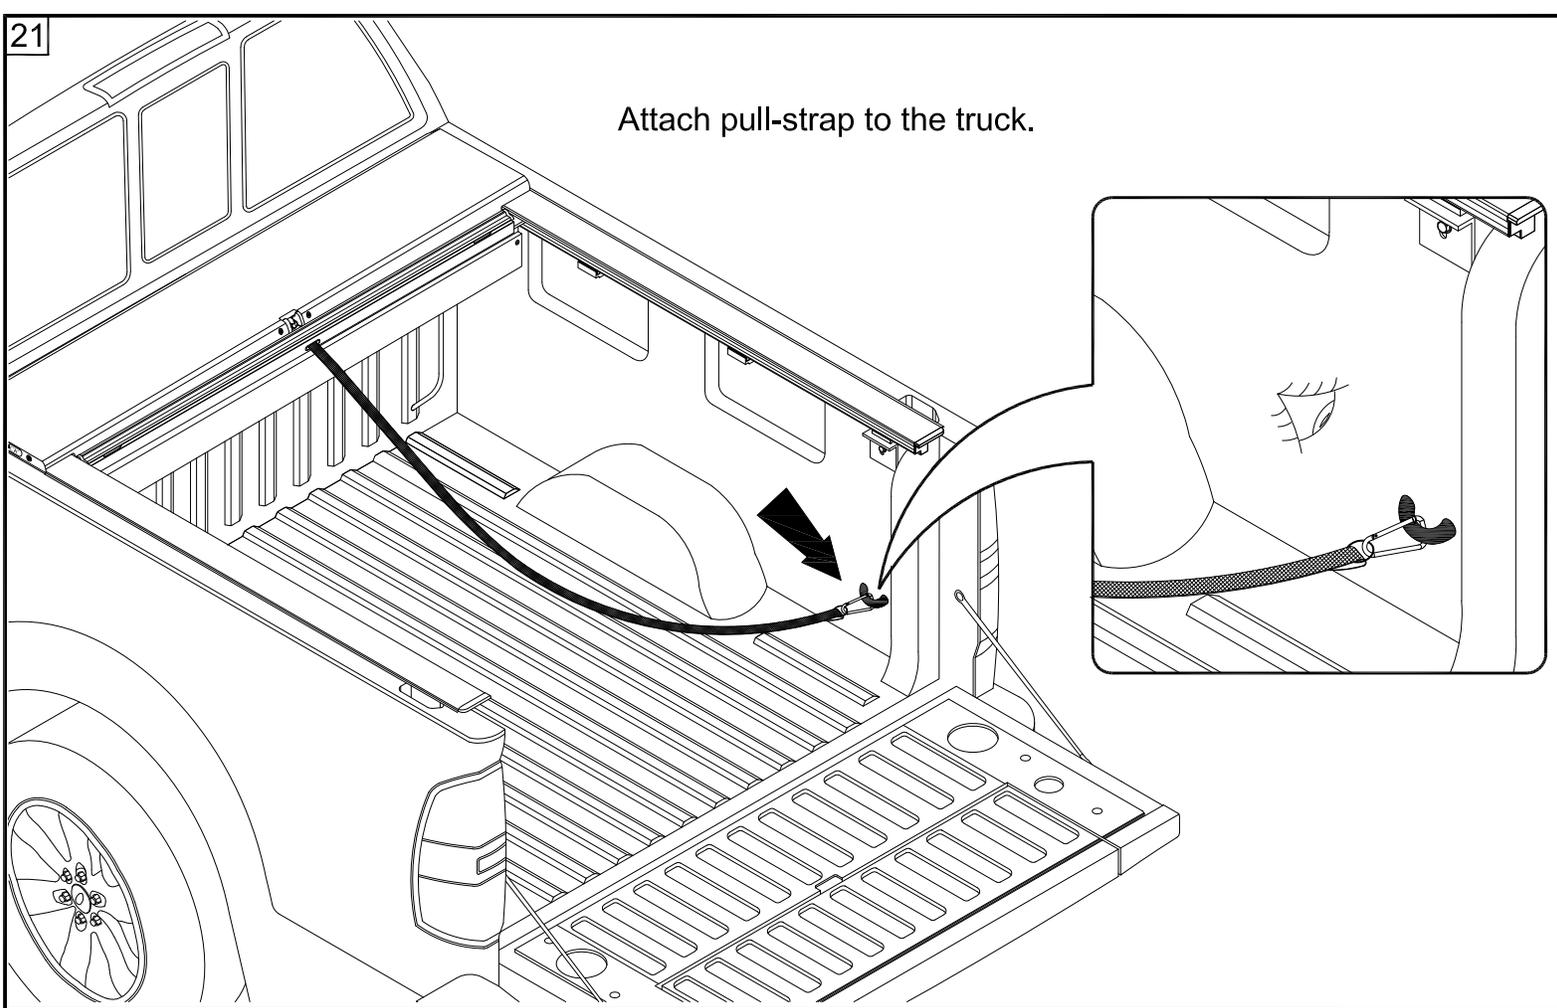

ROLL-N-LOCK®


Any questions please call Customer Service at 800-952-7655 or email
customerservice@rollnlock.com

Troubleshooting

Cover is hard to pull or retract.




Spray 303[®] on a rag and wipe the top gasket in the Track back and forth.

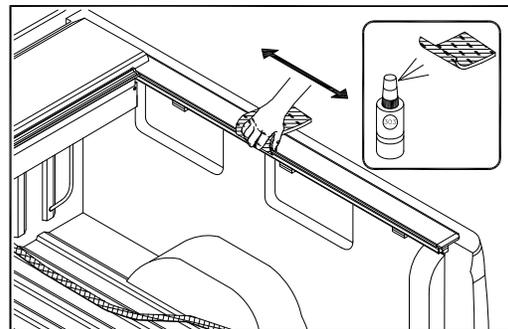

Cover does not latch.




Check Track to Track measurement.

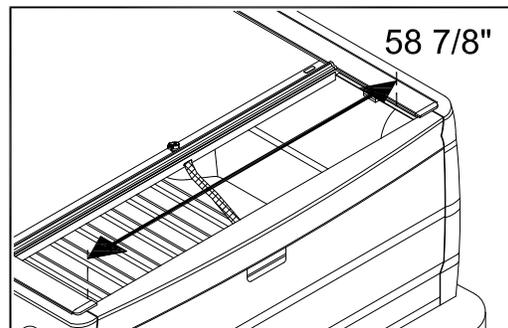

Track to Track is more than 59"




Use shim(s) behind bracket to adjust accordingly.

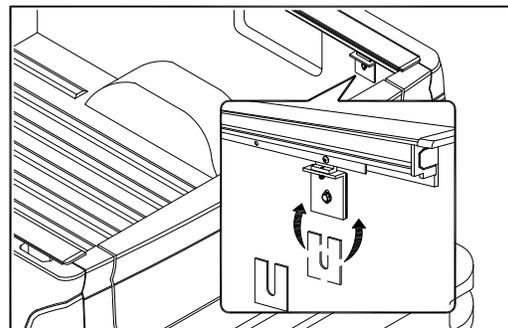

Track tips up or down.




Use shim(s) behind bracket to level Track.

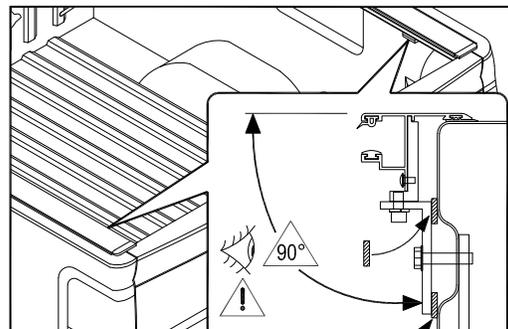

Cover does not reach tailgate.



Make sure Tracks are back against tailgate.

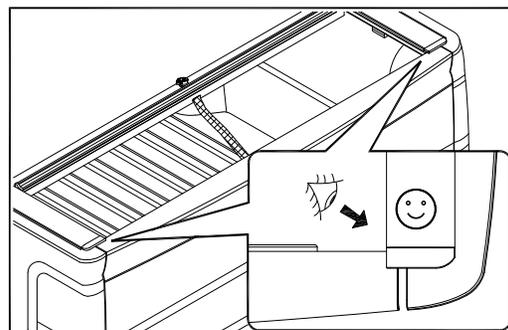



3-YEAR LIMITED WARRANTY*

***5-YEAR LIMITED WARRANTY ON E-SERIES COVERS**

www.rollnlock.com/warranty-information

This limited warranty is extended by ROLL-N-LOCK Corporation, a Florida corporation, with its principal office at 915 S. Dixie Highway, E., Pompano Beach, Florida ("ROLL-N-LOCK"), to the original purchaser of a ROLL-N-LOCK® truck bed cover or cargo management device. ROLL-N-LOCK warrants its products, when purchased directly or from an authorized reseller, to be free from manufacturer's defects for a period of three (3) years from the date of purchase on A and M Series covers -- five (5) years from date of purchase on E-Series covers. During this period, ROLL-N-LOCK, or its authorized dealer, will repair or replace at no expense to the limited warranty holder, any part found to be defective as a result of the manufacturing process, subject to the limitations and exclusions below (See HOW TO MAKE A CLAIM below). Labor charges associated with removing or reinstalling the product and parts are not covered with this warranty. ROLL-N-LOCK warrants only against defects that arise as a result of normal use of the product in normal environmental conditions. ROLL-N-LOCK does not warrant against the following: (a) improper installation, including, but not limited to, installations performed not in accordance with installation instructions and warning labels; (b) extreme environmental conditions, including, but not limited to, temperatures below negative thirty degrees Fahrenheit (-30°F) or above one hundred-twenty degrees Fahrenheit (120°F); (c) water intrusion, including, but not limited to, leaks as a result of normal use; (d) misuse, abuse, modification, tampering or alteration; (e) improper maintenance; (f) operation outside of the product specifications; (g) normal wear and tear, cosmetic damages or fading or deterioration of the finish caused by exposure to sunlight or chemicals and/or other unusual environmental conditions; (h) negligence; or (i) accidents, flood, fire, earthquake or other acts of God. This warranty does not extend in any respect to accessories or parts not produced by ROLL-N-LOCK and shall not extend to any consequential or incidental damages. This warranty is expressly in lieu of all other warranties expressed or implied, including the warranties of merchantability and fitness for a particular purpose and of all other obligations or liabilities on the part of ROLL-N-LOCK. ROLL-N-LOCK neither assumes nor authorizes any other person to assume for it any other liability in connection with the sale of its products. The warranty expires if the product is removed from the original vehicle or if the original vehicle is transferred to another owner. The warranty is not transferable from the original purchaser. Some states do not allow the exclusion or limitation of incidental or consequential damages, or limits on implied warranties, therefore the above limitations may not apply to you. This warranty gives you specific legal rights and you may also have other rights which vary from state to state. ROLL-N-LOCK does not warrant any products purchased from unauthorized resellers or any products whose serial number has been removed or defaced. For a complete list of ROLL-N-LOCK authorized dealers, please visit ROLL-N-LOCK's website at <http://rollnlock.com> and click on the "Find a Dealer" tab.

HOW TO MAKE A CLAIM

For products purchased from a brick and mortar dealer, the party claiming must notify the dealer from whom the product was purchased of the defect or malfunction. The dealer will inspect the product and consult ROLL-N-LOCK to be covered by its warranty. ROLL-N-LOCK will send, at no cost to the warranty holder (including freight expense within the continental U.S.A.), the replacement part or parts necessary to correct the defect. If the problem is determined to be caused by improper installation by the dealer, the dealer will, in accordance with his obligation to adhere to ROLL-N-LOCK's authorized dealer warranty policy, immediately rectify the problem. For products purchased from ROLL-N-LOCK directly, a ROLL-N-LOCK internet dealer or any other authorized outlet that excluded the service of installation, and the warranty holder performed the installation on a do-it-yourself basis, the warranty holder may, at ROLL-N-LOCK's option, be required to return the defective parts, properly packaged and at the warranty holder's expense, to ROLL-N-LOCK's warranty department at the address below. The warranty holder should include a product I.D. number and a brief description of the problem. If the part or parts are found to be defective, the replacement part or parts will be immediately returned to the warranty holder at ROLL-N-LOCK's expense (limited to the continental U.S.A.). If the warranty holder requires assistance, he may call ROLL-N-LOCK directly at 1-800-952-7655. ROLL-N-LOCK maintains the highest possible standards of manufacturing and quality control. Accordingly, it expects its dealers to adhere to a similar standard when installing its products and upholding this warranty. If you believe you have a defective ROLL-N-LOCK product and encounter any difficulty obtaining satisfaction, please contact ROLL-N-LOCK customer service by telephone at 1-800-952-7655 or by email at info@rollnlock.com.

