

INSTALLATION INSTRUCTIONS

PART# PW04189701;PW05772801/G554189701

CONQUEST REAR BUMPER FOR TANK 300 21-24



Before Installation













- Please read the instruction completely for easy installation, which will also help you to avoid scratches or other potential damages to your appealing car.
- The information shown here is for reference only and may differ from the product that you receive, however the goods are fitted in the same way.

Care and Cleaning










- Mild soap may be used also to clean the Product.
- Please periodically check and retighten all the hardware and clean the investment for a refresh look.

INSTALLATION INSTRUCTIONS

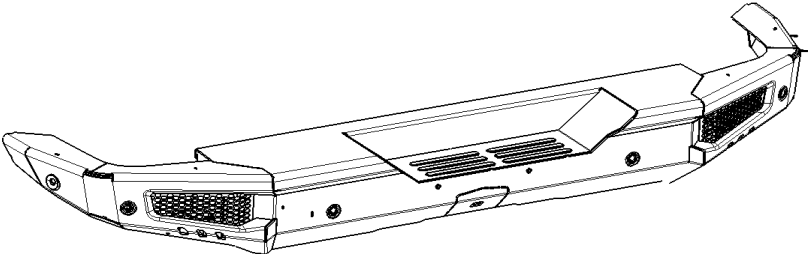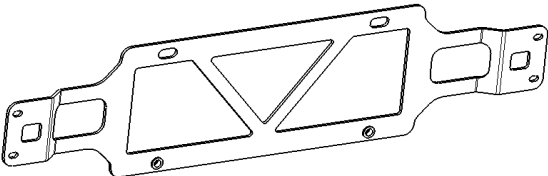Parts list

NO.	QTY	PICTURE	NO.	QTY	PICTURE
①	1				
		Rear Bumper			
②	1				
		Foldable License Plate			
③	1		④	2	
		Extended wiring harness			Rear radar cable
⑤	2		⑥	1	
		Foldable License Plate Light			Rear Foldable License Plate Cable
⑦	2		⑧	10	
		Fog Light Plug(Waterproof)			Ribbon for Harness
⑨	6		⑩	4	
		Radar Lid			Foam Packer (D20.6X10)
⑪	4		⑫	1	
		Base			Wrench S=4


INSTALLATION INSTRUCTIONS

⑬	4	 Spring washer D12	⑭	4	 Cross recessed pan head screw M6_16
⑮	4	 Hex Bolt(Full thread) M12x1.25_40	⑯	4	 Large washer D12(12x32x3mm)
⑰	2	 Plastic Ring	⑱	2	 Hex nut M4
⑲	2	 Spring washer D4	⑳	2	 Flag washer D4(4x8.65x0.8mm)
㉑	2	 Cross recessed pan head screw M4_15			

Installation

Installation Fig.

INSTALLATION INSTRUCTIONS

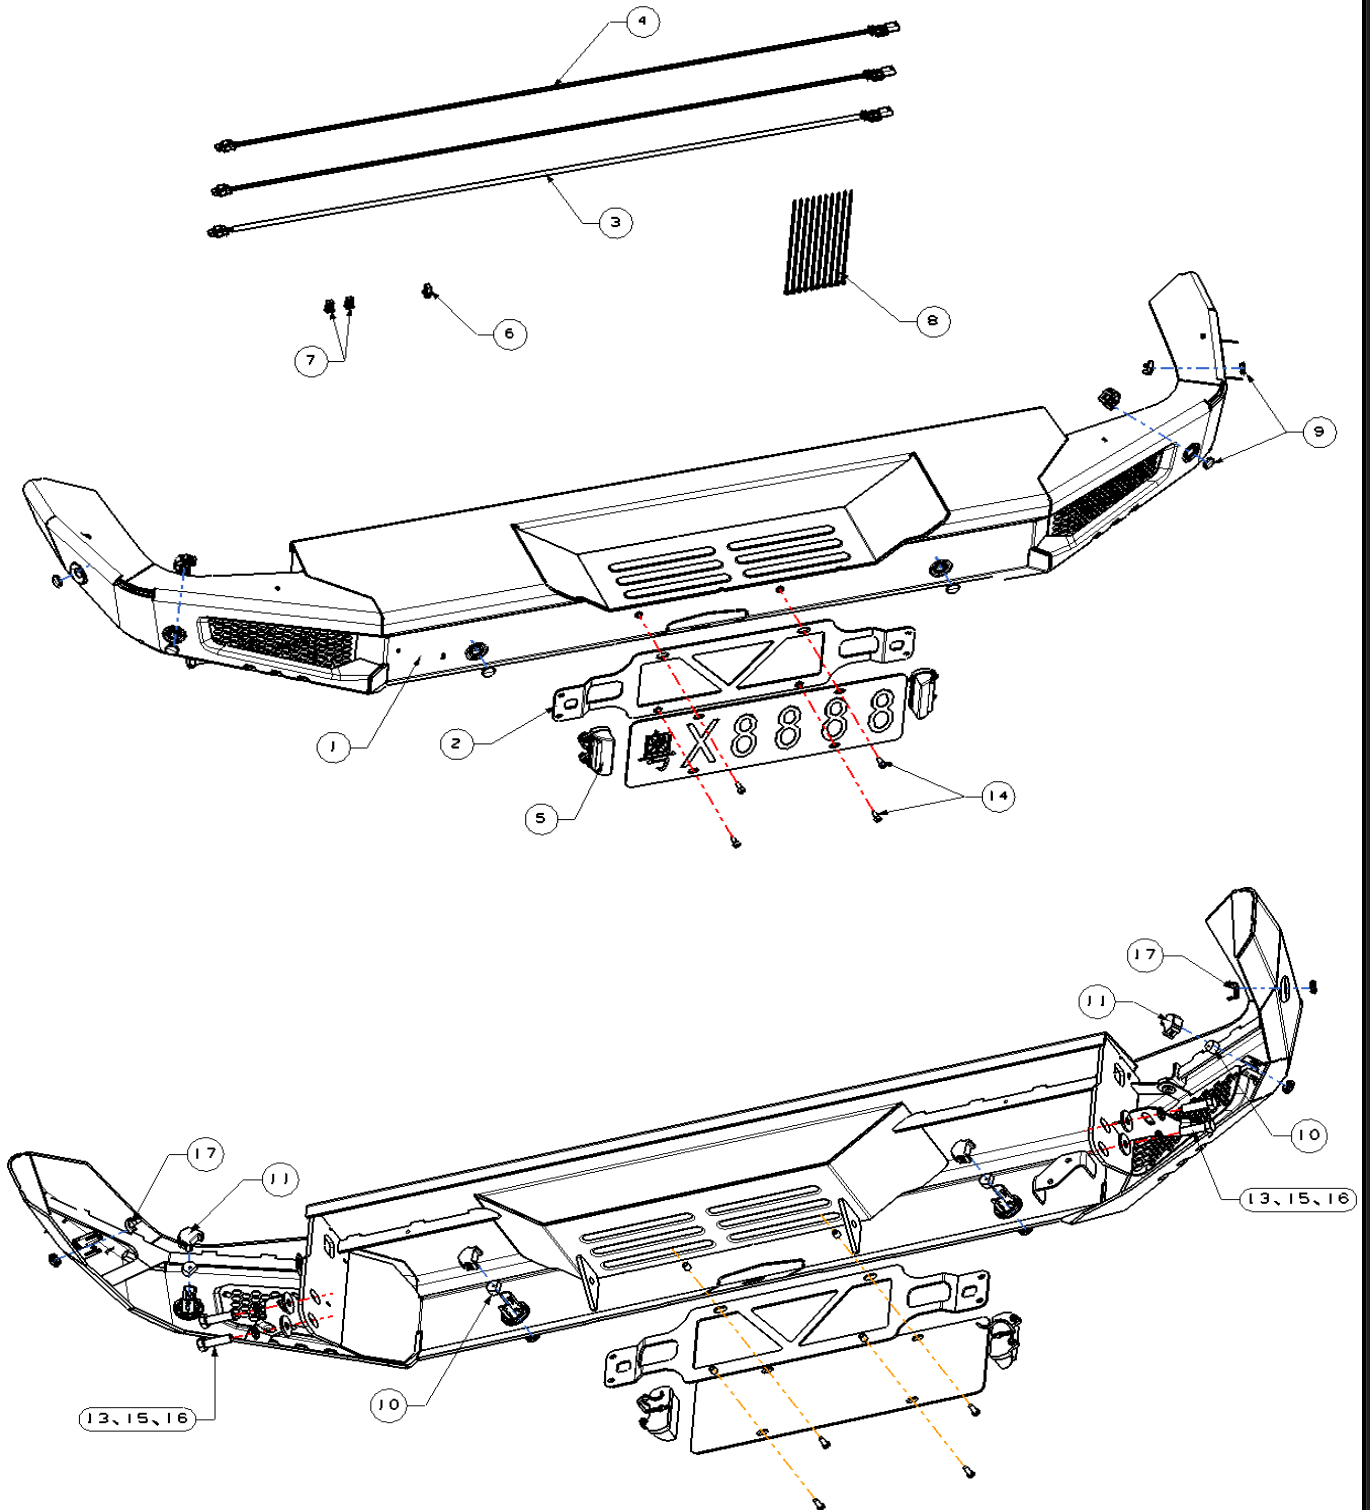

INSTALLATION INSTRUCTIONS

Installation tools:

- 1、 universal socket wrench, socket (specifications 10/13/16/18)





- 2、 open-end wrench (specifications 10/13/16/18)




- 3、 plastic rivet disassembly pliers, cross screwdriver, and handheld drill



STEP 1: Verify that all parts are present according to the manual.

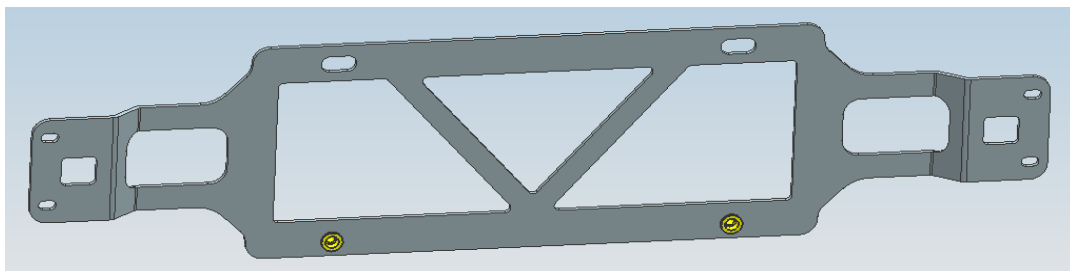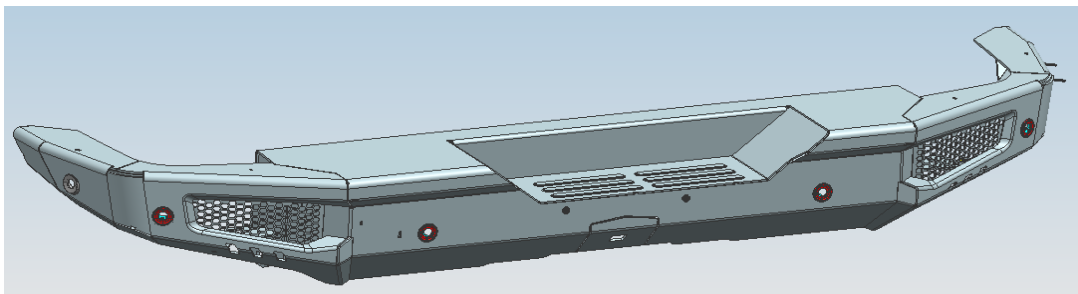


INSTALLATION INSTRUCTIONS

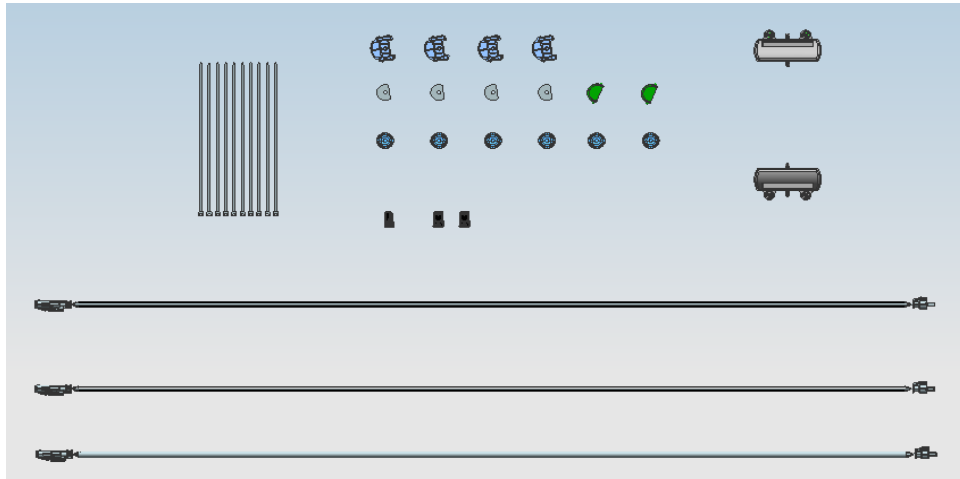

STEP 2: Remove the original rear bumper and its accessories.


2.1 Remove the original rear bumper

Use plastic rivets to disassemble specialized pliers, Phillips screwdriver, socket wrench, 10mm

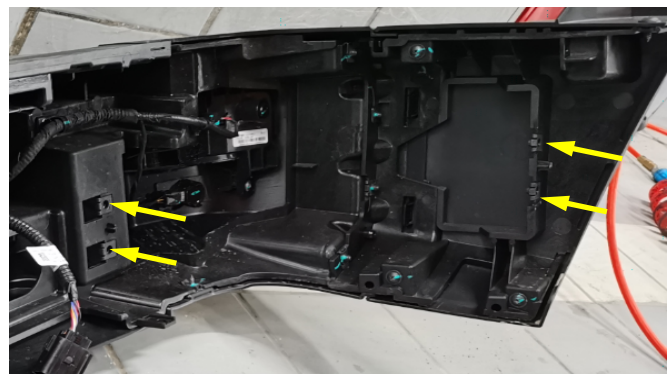


INSTALLATION INSTRUCTIONS

2.2 Remove the original rear bumper bracket 1 and bracket 2

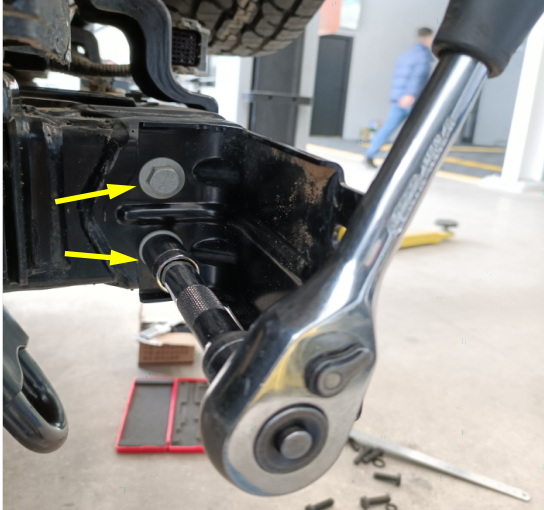

Use socket wrench and 18mm socket

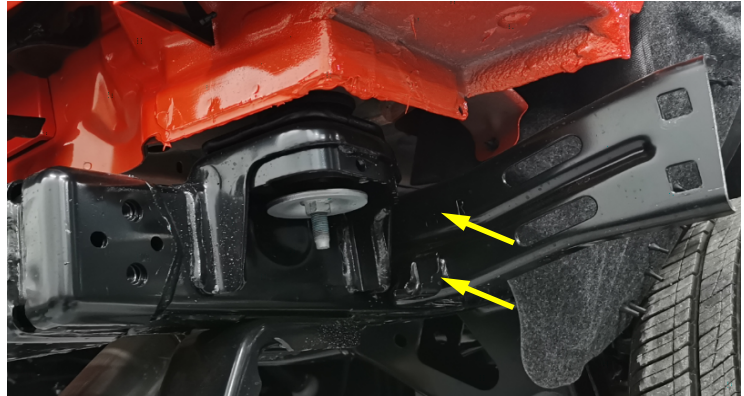

2.3 Remove the radar harness, original radar and rear fog light flasher from the original rear bumper.

Use plastic rivets to disassemble specialized pliers and Phillips screwdrivers



INSTALLATION INSTRUCTIONS

STEP 3: Install the rear bumper and its accessories.

3.1 Install the original radar wiring harness, original radar, and rear fog light flasher onto the rear bumper





Remove the transparent plastic pad from the radar




Install the radar from the back into the radar hole and press it

Noted: When the original radar harness is not long enough, find the extension cables with ③ ④ in the accessory package.

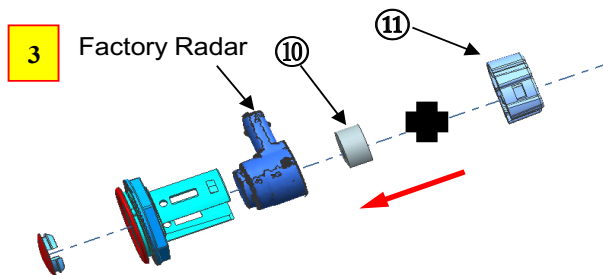
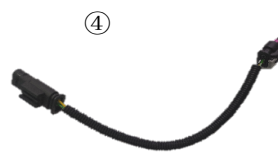


Press the ⑩ ⑪

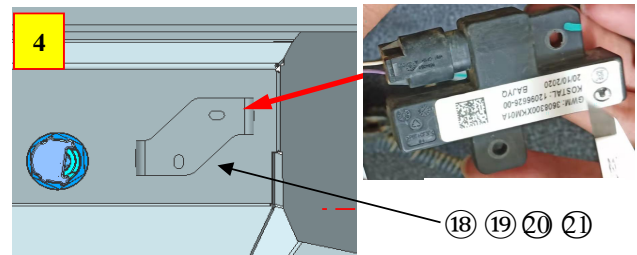

using ⑱ ⑲ ⑳ ㉑ install the license plate light flasher onto the inner of the rear bumper.

If it is the 6 radars version, both sides of the radar are fixed by ⑳ Plastic Ring.

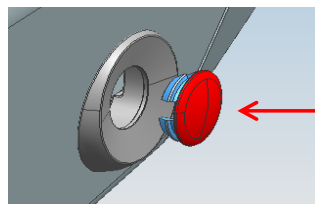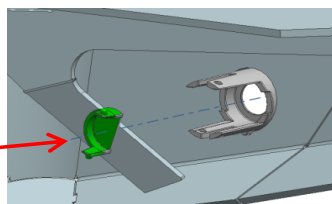


If it is the 4 radars version, both sides of the radar are fixed by ⑨ Radar Lid

INSTALLATION INSTRUCTIONS


5

Noted: The original wiring harness plug is here

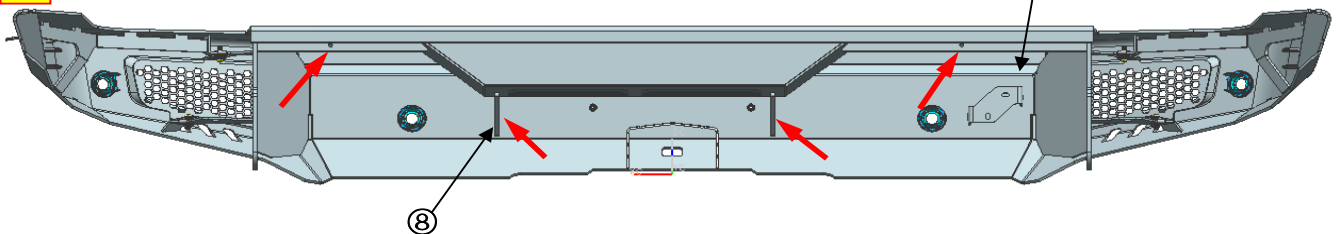

Thread the wire harness through the reinforcing ribs and support ribs respectively, and fix it with ⑧ at the reserved holes



6

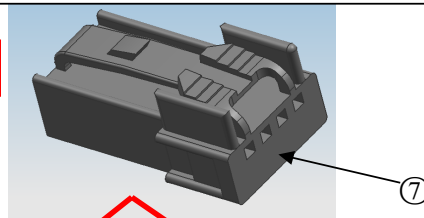

Insert ⑦ Fog Light Plug(Waterproof) x2 into the left and right fog light of the wiring


Models with optional fog lights need to add the following steps:

1: Assemble the fog lamp components first

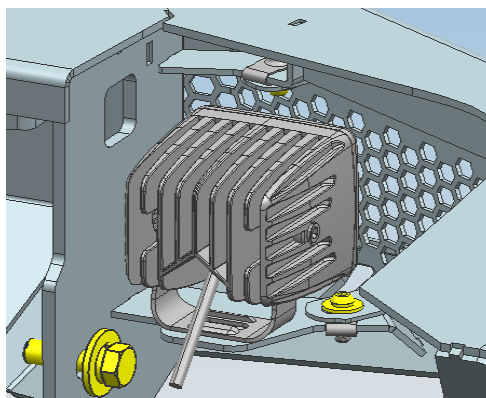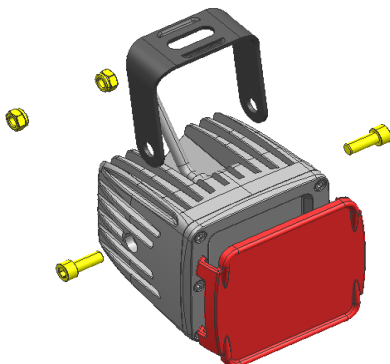

INSTALLATION INSTRUCTIONS


2: Install the assembled fog light assembly onto the dedicated lamp holder on the rear bumper using the fixing screws that come with the LED light

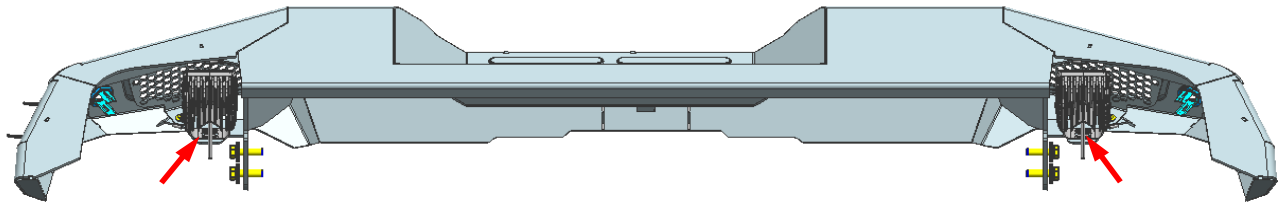

3: Install the wiring harness for the rear fog lamp to the rear trunk of the vehicle

3.2 Install the license plate light onto the license plate bracket. 【Not using trailer hitch】


Use a socket wrench, 8mm socket, and Phillips screwdriver

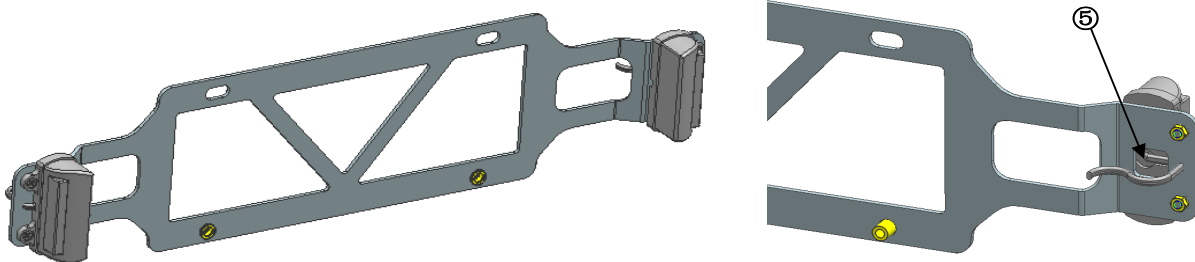


Install the license plate light onto the license plate bracket and the ⑤ through the license plate light hole

3.3 Install the license plate and license plate bracket onto the rear bumper, tighten the screws, connect the extension harness of the license plate light to the license plate light plug, and thread the extension harness of the license plate light through the reserved square hole in the middle.

Use a Phillips screwdriver

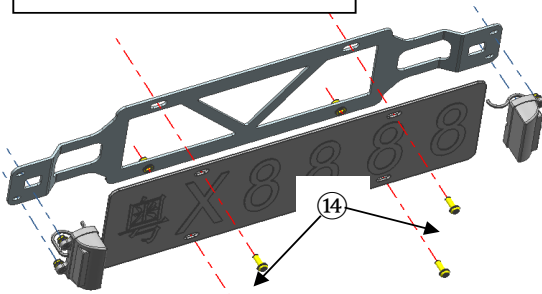


First, use ⑭ cross slot pan head screws to install the license plate onto the holes at the bottom of the license plate bracket

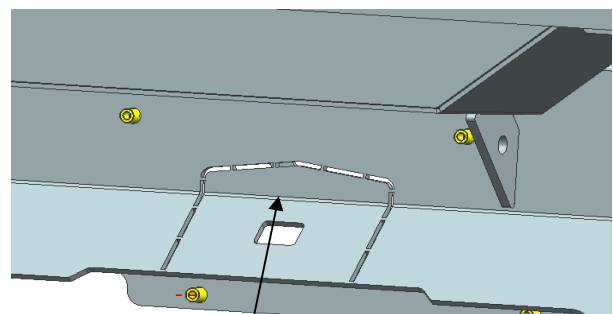


Connect the ⑥ license plate extension cable and insert it into the rear bumper through this square hole

INSTALLATION INSTRUCTIONS


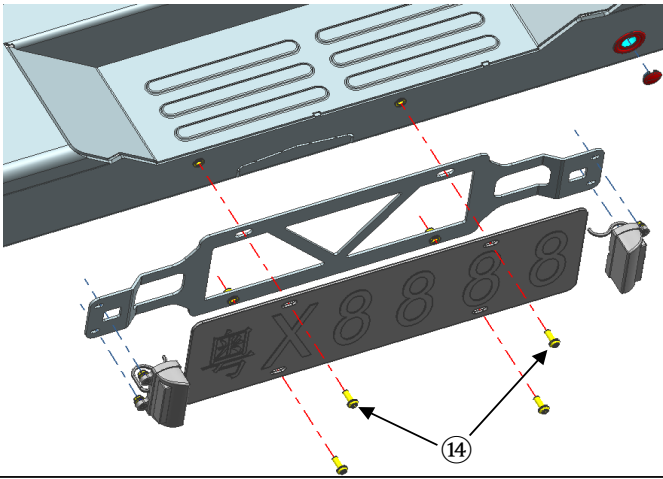


Check if the license plate extension cable has passed through the middle square hole. After passing through, use the remaining (14) cross slot pan head screws to install the license plate and license plate bracket onto the bumper.


3.2 安装后杠中置拖车钩。【Using trailer hitch】

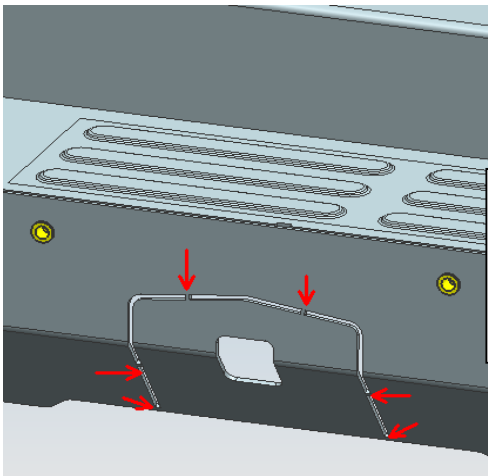

Cut off the cover on the bumper with an angle grinder and wrap it with a tape

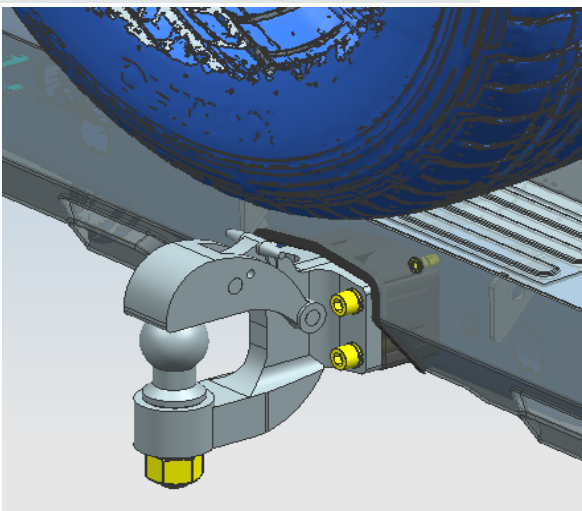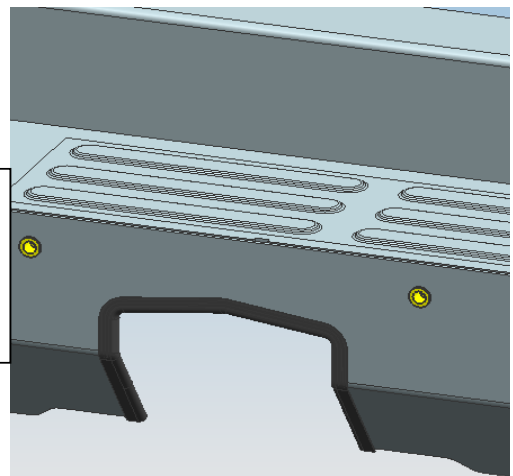


Install the trailer hitch onto the vehicle

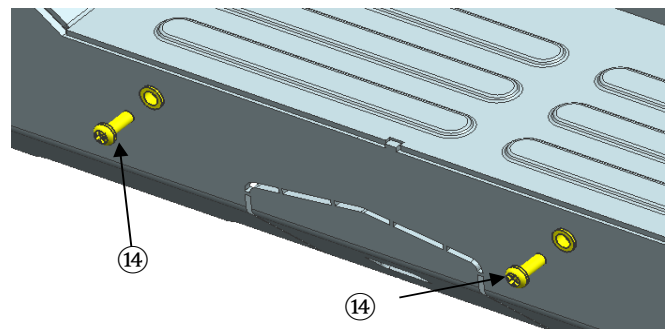


Block the hole where the license plate bracket was originally installed with a cross groove pan head screw

INSTALLATION INSTRUCTIONS

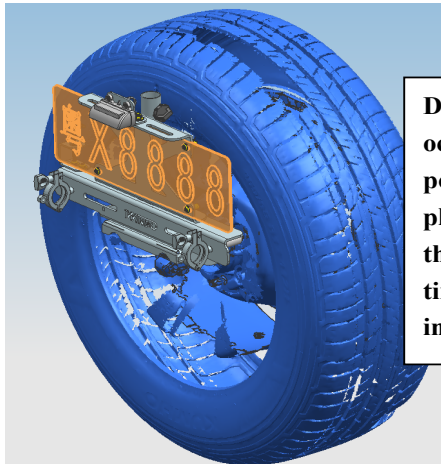

Due to the trailer hitch occupying the installation position of the original license plate, it is necessary to transfer the license plate to the spare tire (note: this is not included in this product)

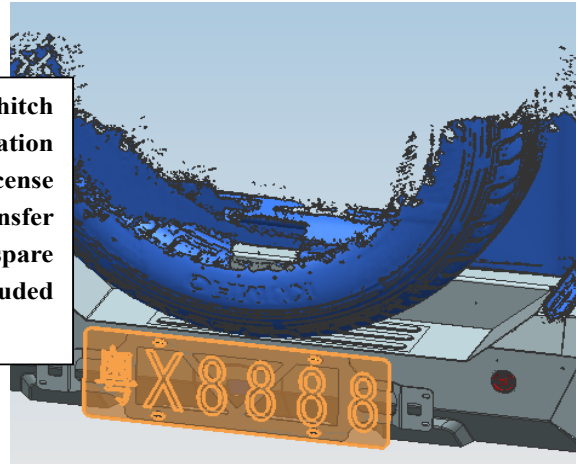


STEP 4: Install the rear bumper

4.1 Connect the wire harness end on the rear bumper to the port on the original vehicle and lock it securely





4.2 Push the plates on both sides of the rear bumper parallel to the vehicle bracket on both sides of the original beam, adjust and lock them.

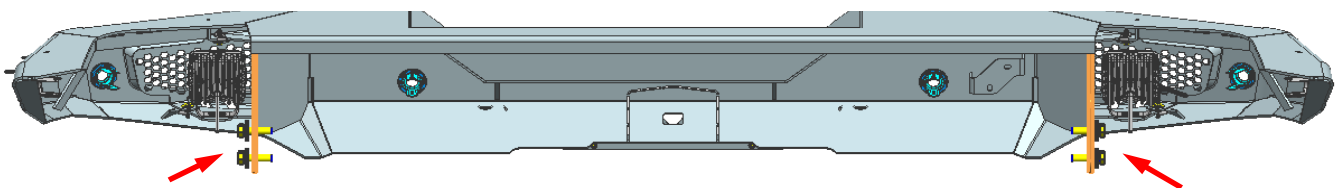

The nuts&washers on both sides of the rear bumper are installed on the outside of the bracket

INSTALLATION INSTRUCTIONS

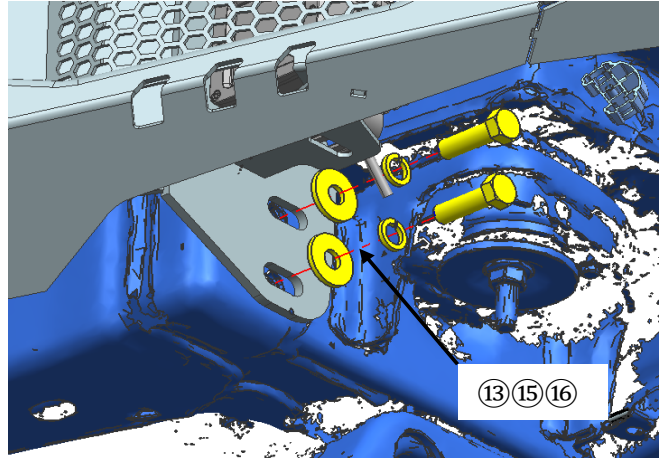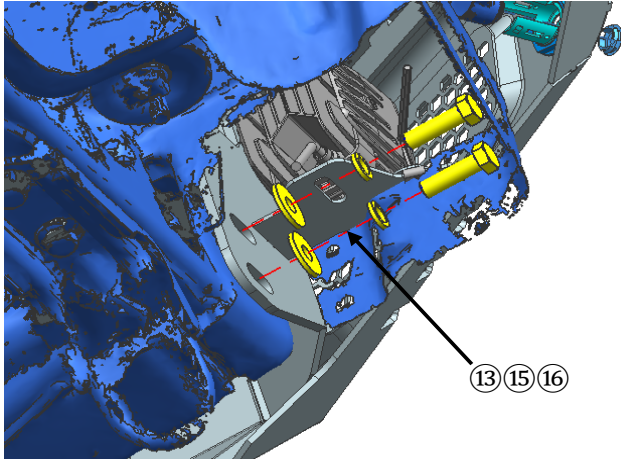

4.3 Adjust the gap between the rear bumper and the vehicle, plug the license plate light and radar harness plugs

STEP 5: Installation is finished, pick up all tools

NOTE

Any damages and losses caused by improper installation and application, goes beyond our quality warranty.