


HD Rear Bumper, JK

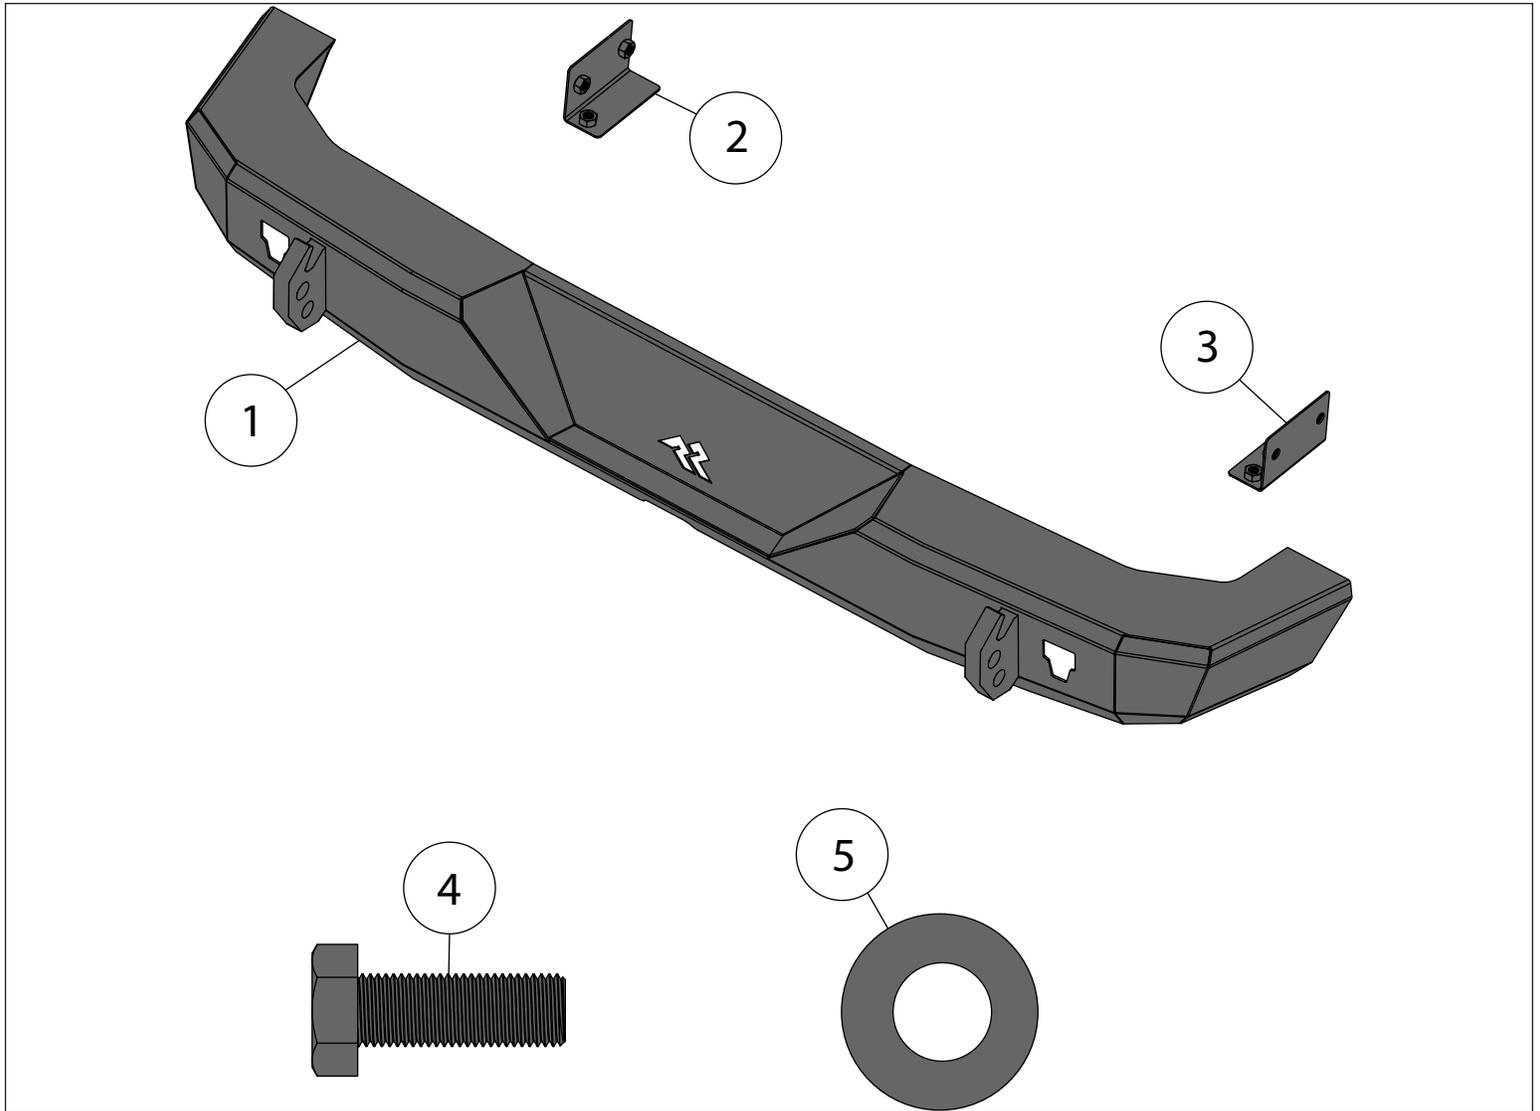

Components

1. Rear Bumper	(1)	4. M14 Hex Head Bolt	(6)
2. Left Mounting Bracket	(1)	5. M14 Washer	(6)
3. Right Mounting Bracket	(1)		

OMIX-ADA® TECHNICAL SUPPORT

PHONE: M-F 8am - 5pm EST 1-800-449-6649

FOR WARRANTY OR TECH CONCERNS EMAIL: webmaster@omixsupport.com

ATTN: STATE OF CALIFORNIA CONSUMERS


⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov.

HD Rear Bumper, JK


1. Remove spare tire and factory rear bumper.



Have another person help lift tire off tire mount.

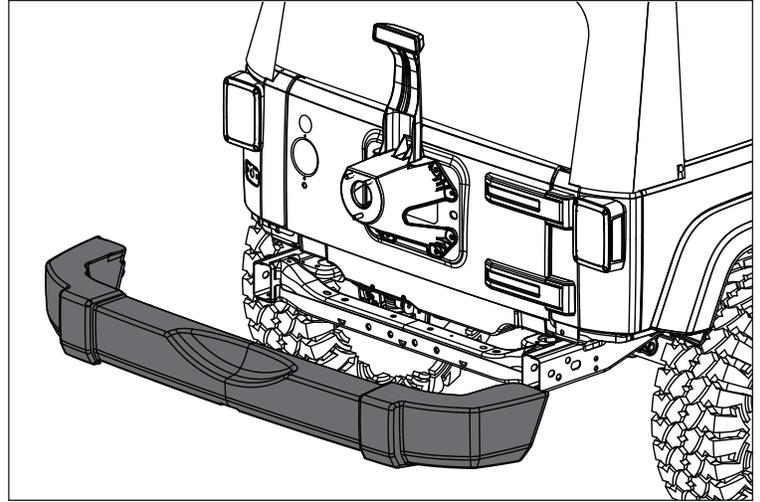

2. Align left and right mounting brackets into frame rail.

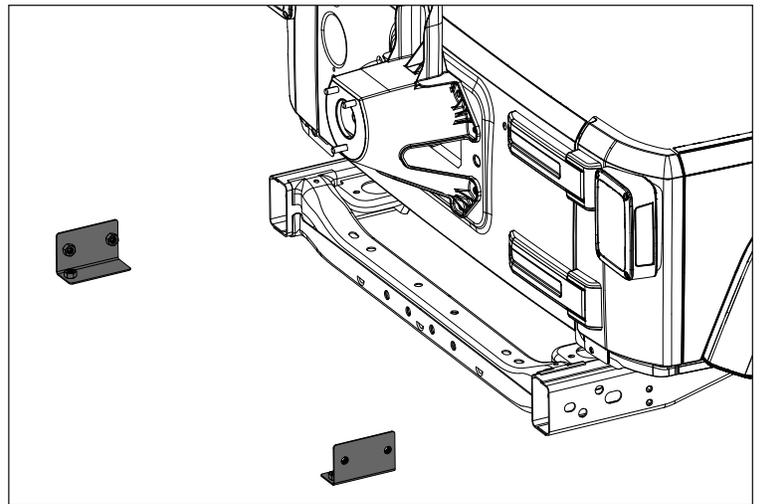

3. Align rear bumper with body. Using supplied M14 hardware, attach rear bumper to vehicle.



Not all vehicles have holes for the lower bolt.

4. Reinstall spare tire and torque lug nuts to factory specifications.

